


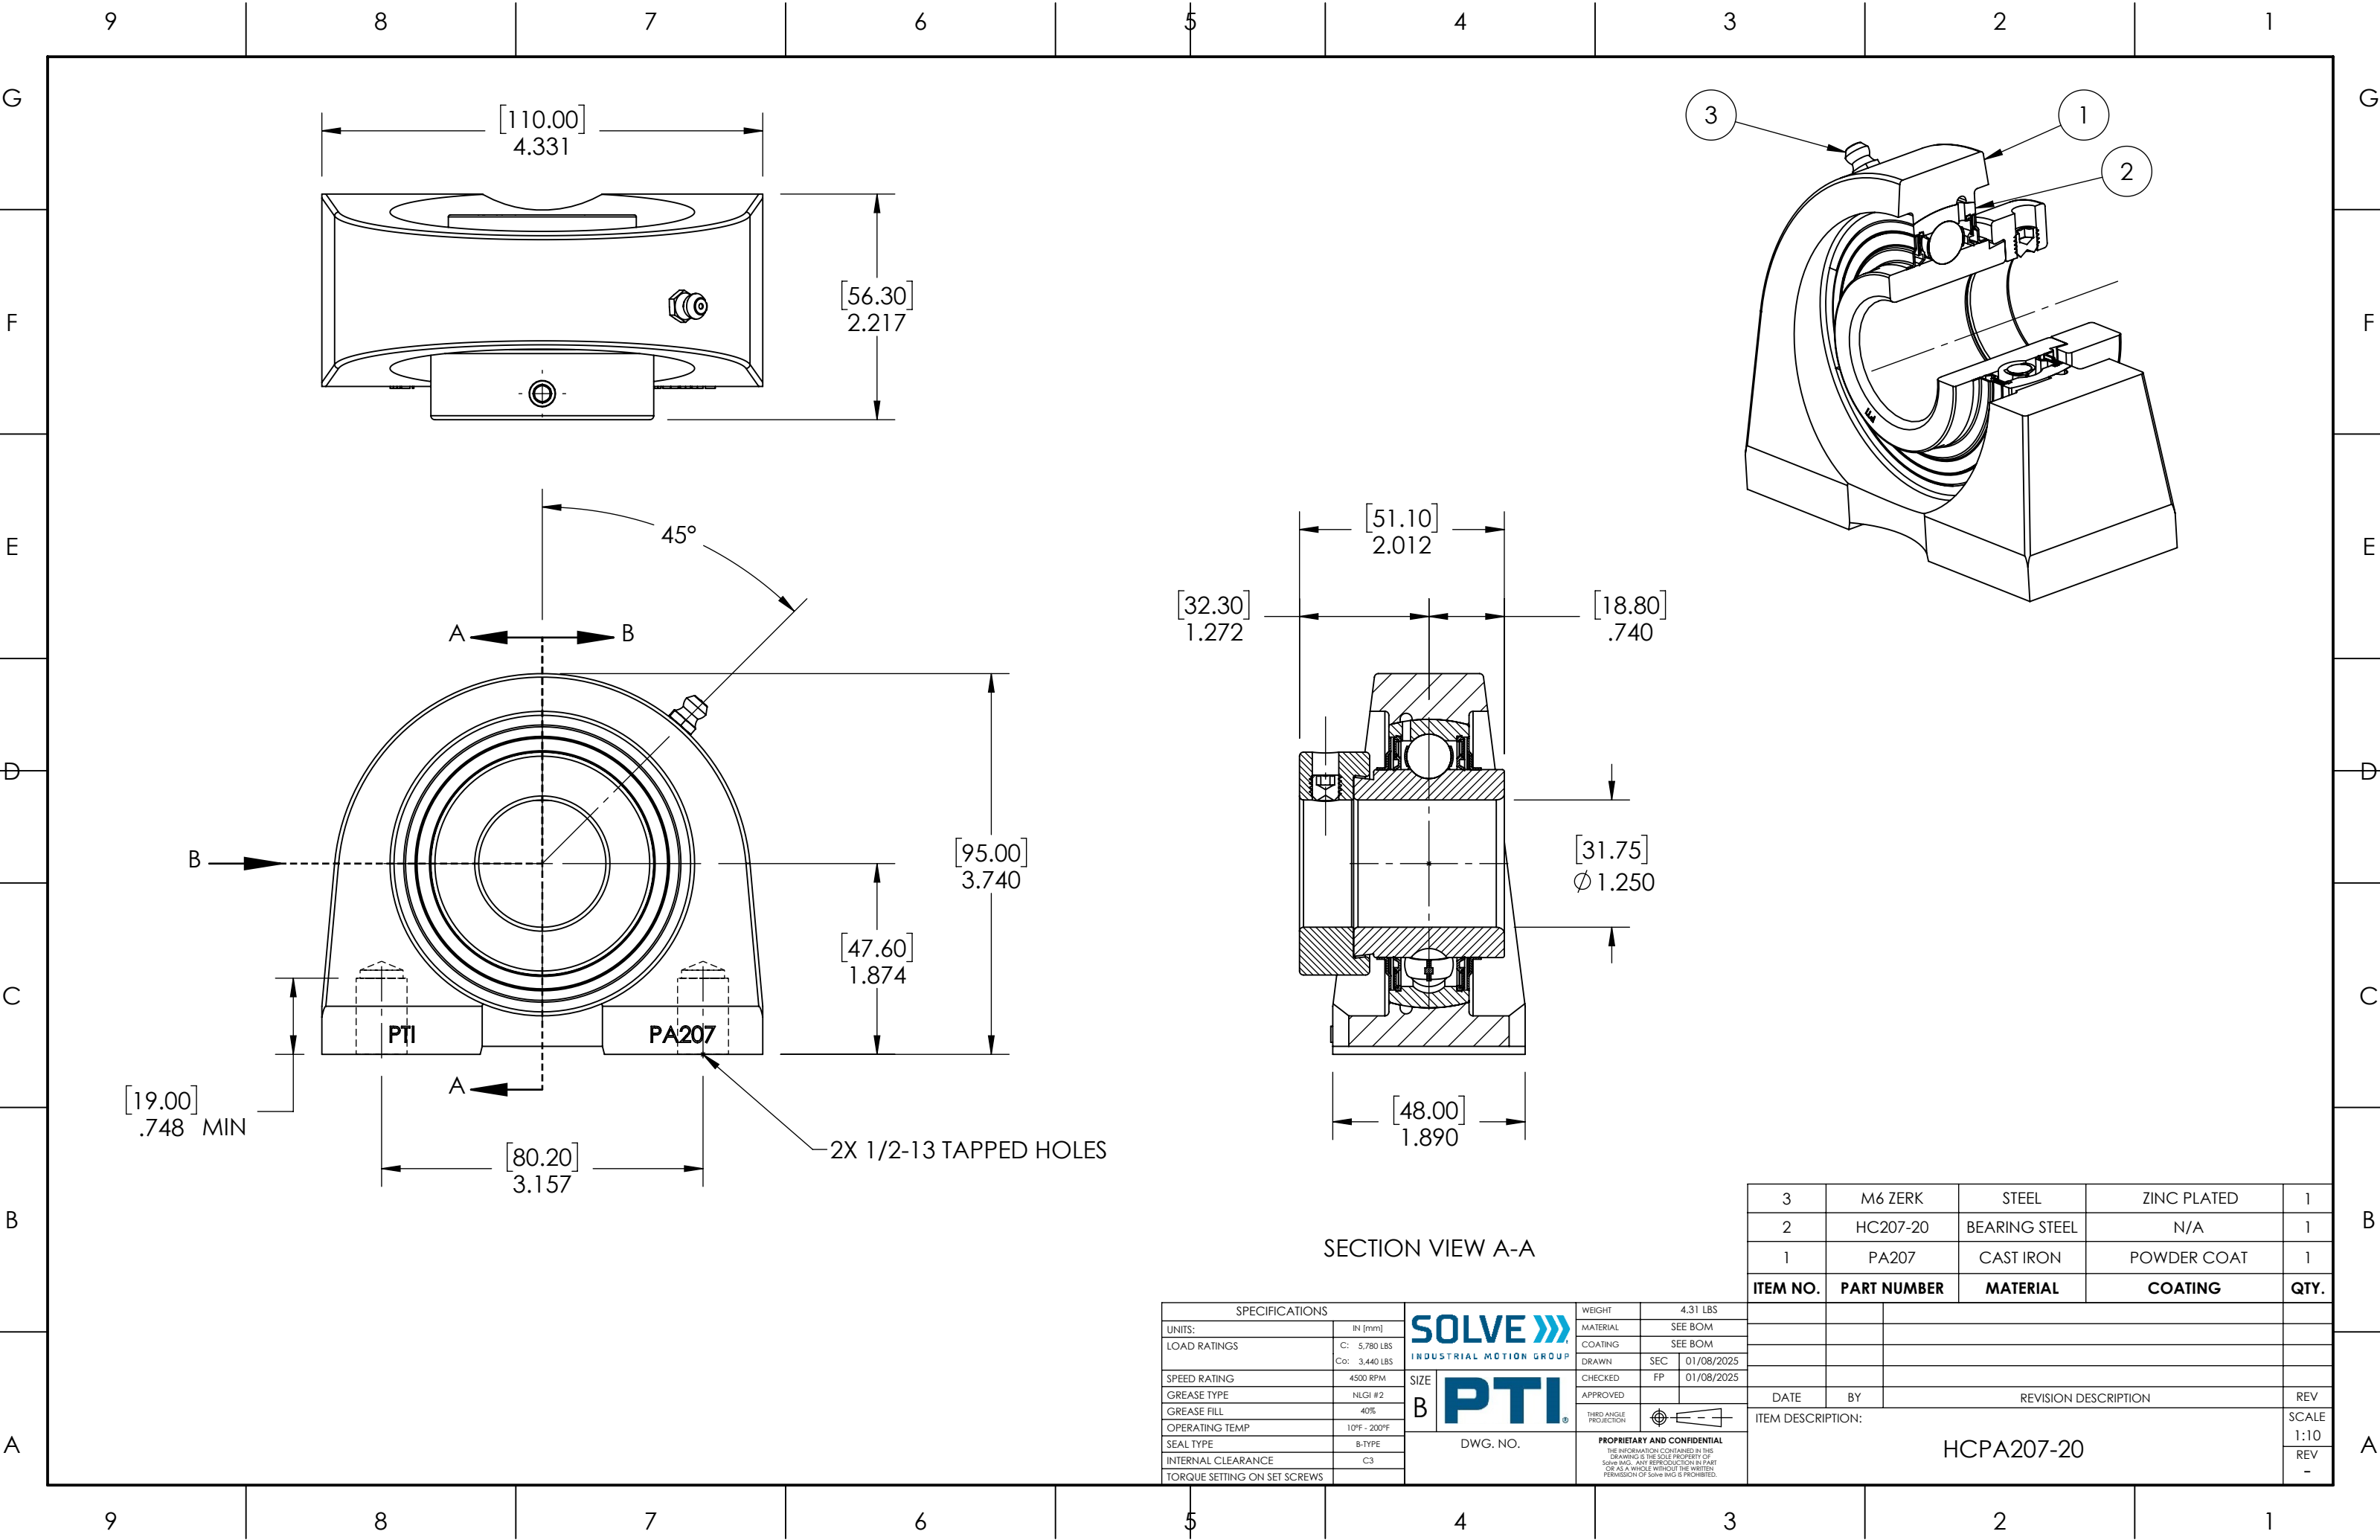

SECTION VIEW A-A

SPECIFICATIONS		SOLVE 		WEIGHT		4.31 LBS	
UNITS:	IN [mm]	MATERIAL		SEE BOM			
LOAD RATINGS	C: 5,780 LBS Co: 3,440 LBS	COATING		SEE BOM			
SPEED RATING	4500 RPM	DRAWN		SEC	01/08/2025		
GREASE TYPE	NLGI #2	CHECKED		FP	01/08/2025		
GREASE FILL	40%	APPROVED					
OPERATING TEMP	10°F - 200°F	DWG. NO.		PROPRIETARY AND CONFIDENTIAL			
SEAL TYPE	B-TYPE			THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
INTERNAL CLEARANCE	C3						
TORQUE SETTING ON SET SCREWS							

3	M6 ZERK	STEEL	ZINC PLATED	1
2	HC207-20	BEARING STEEL	N/A	1
1	PA207	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: HCPA207-20				SCALE
				1:10
				REV -