
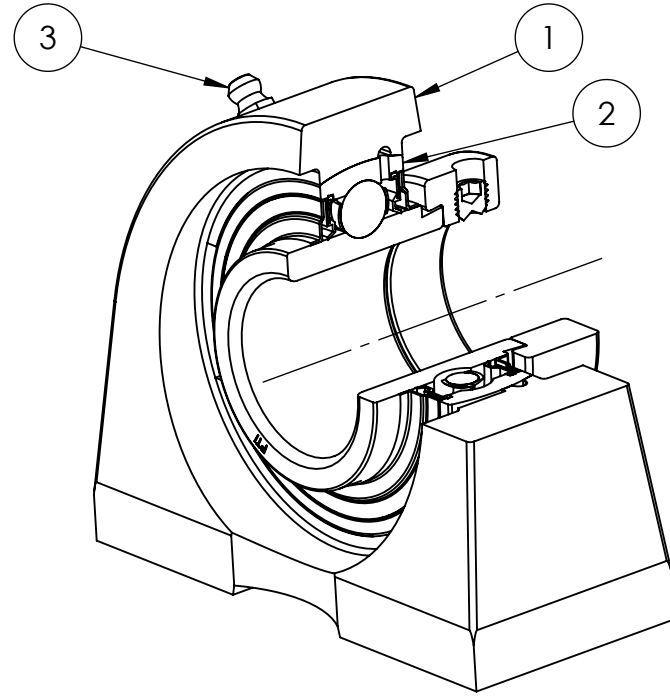
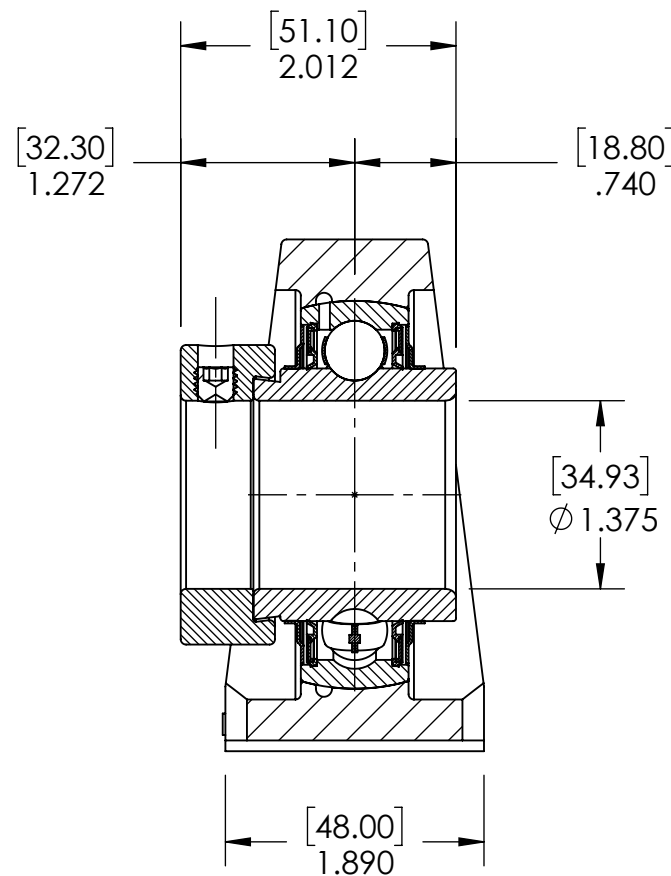
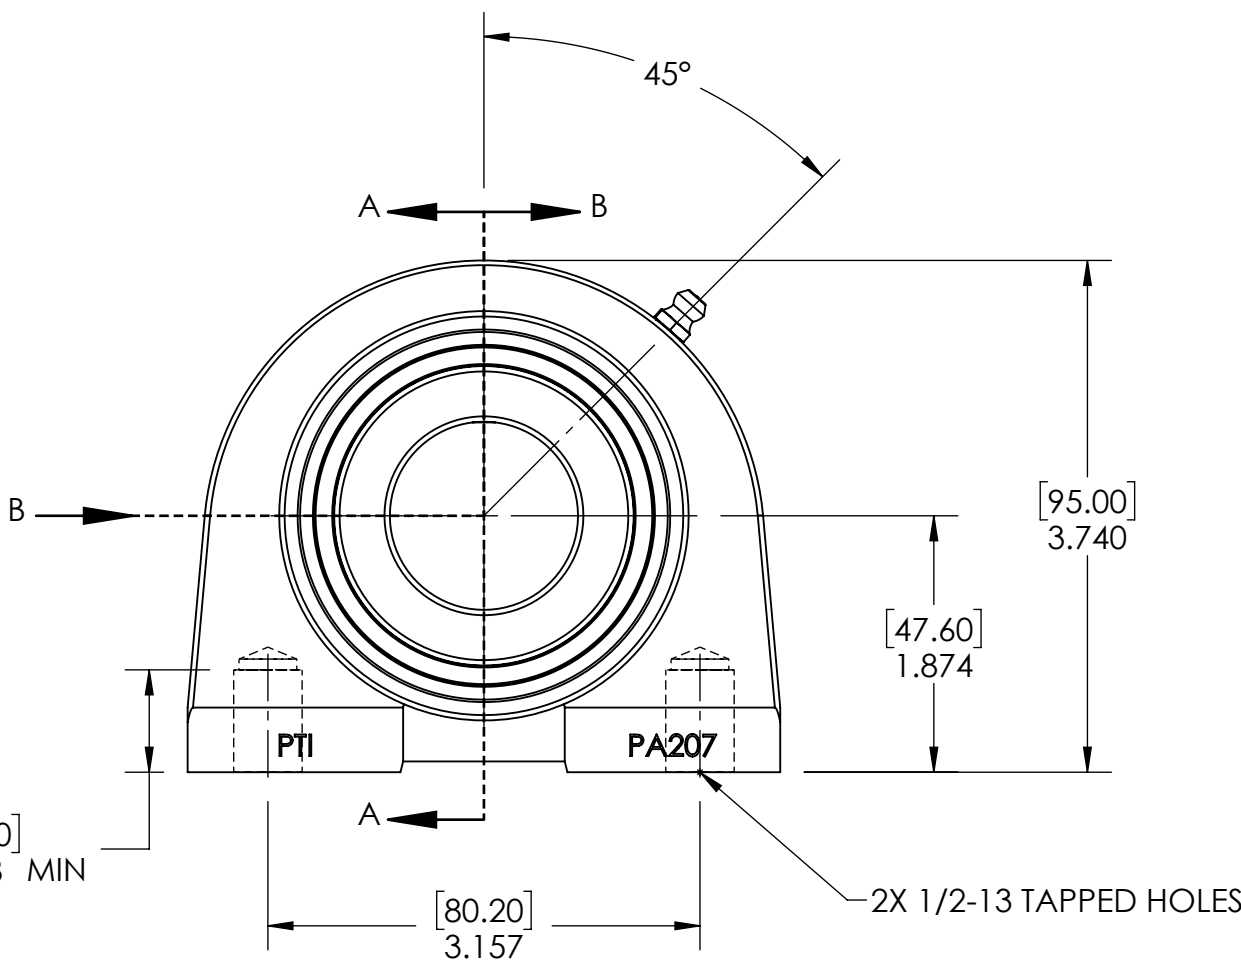
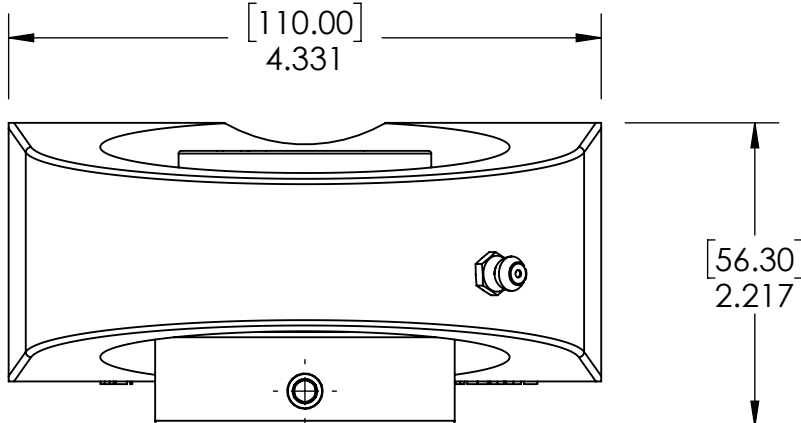
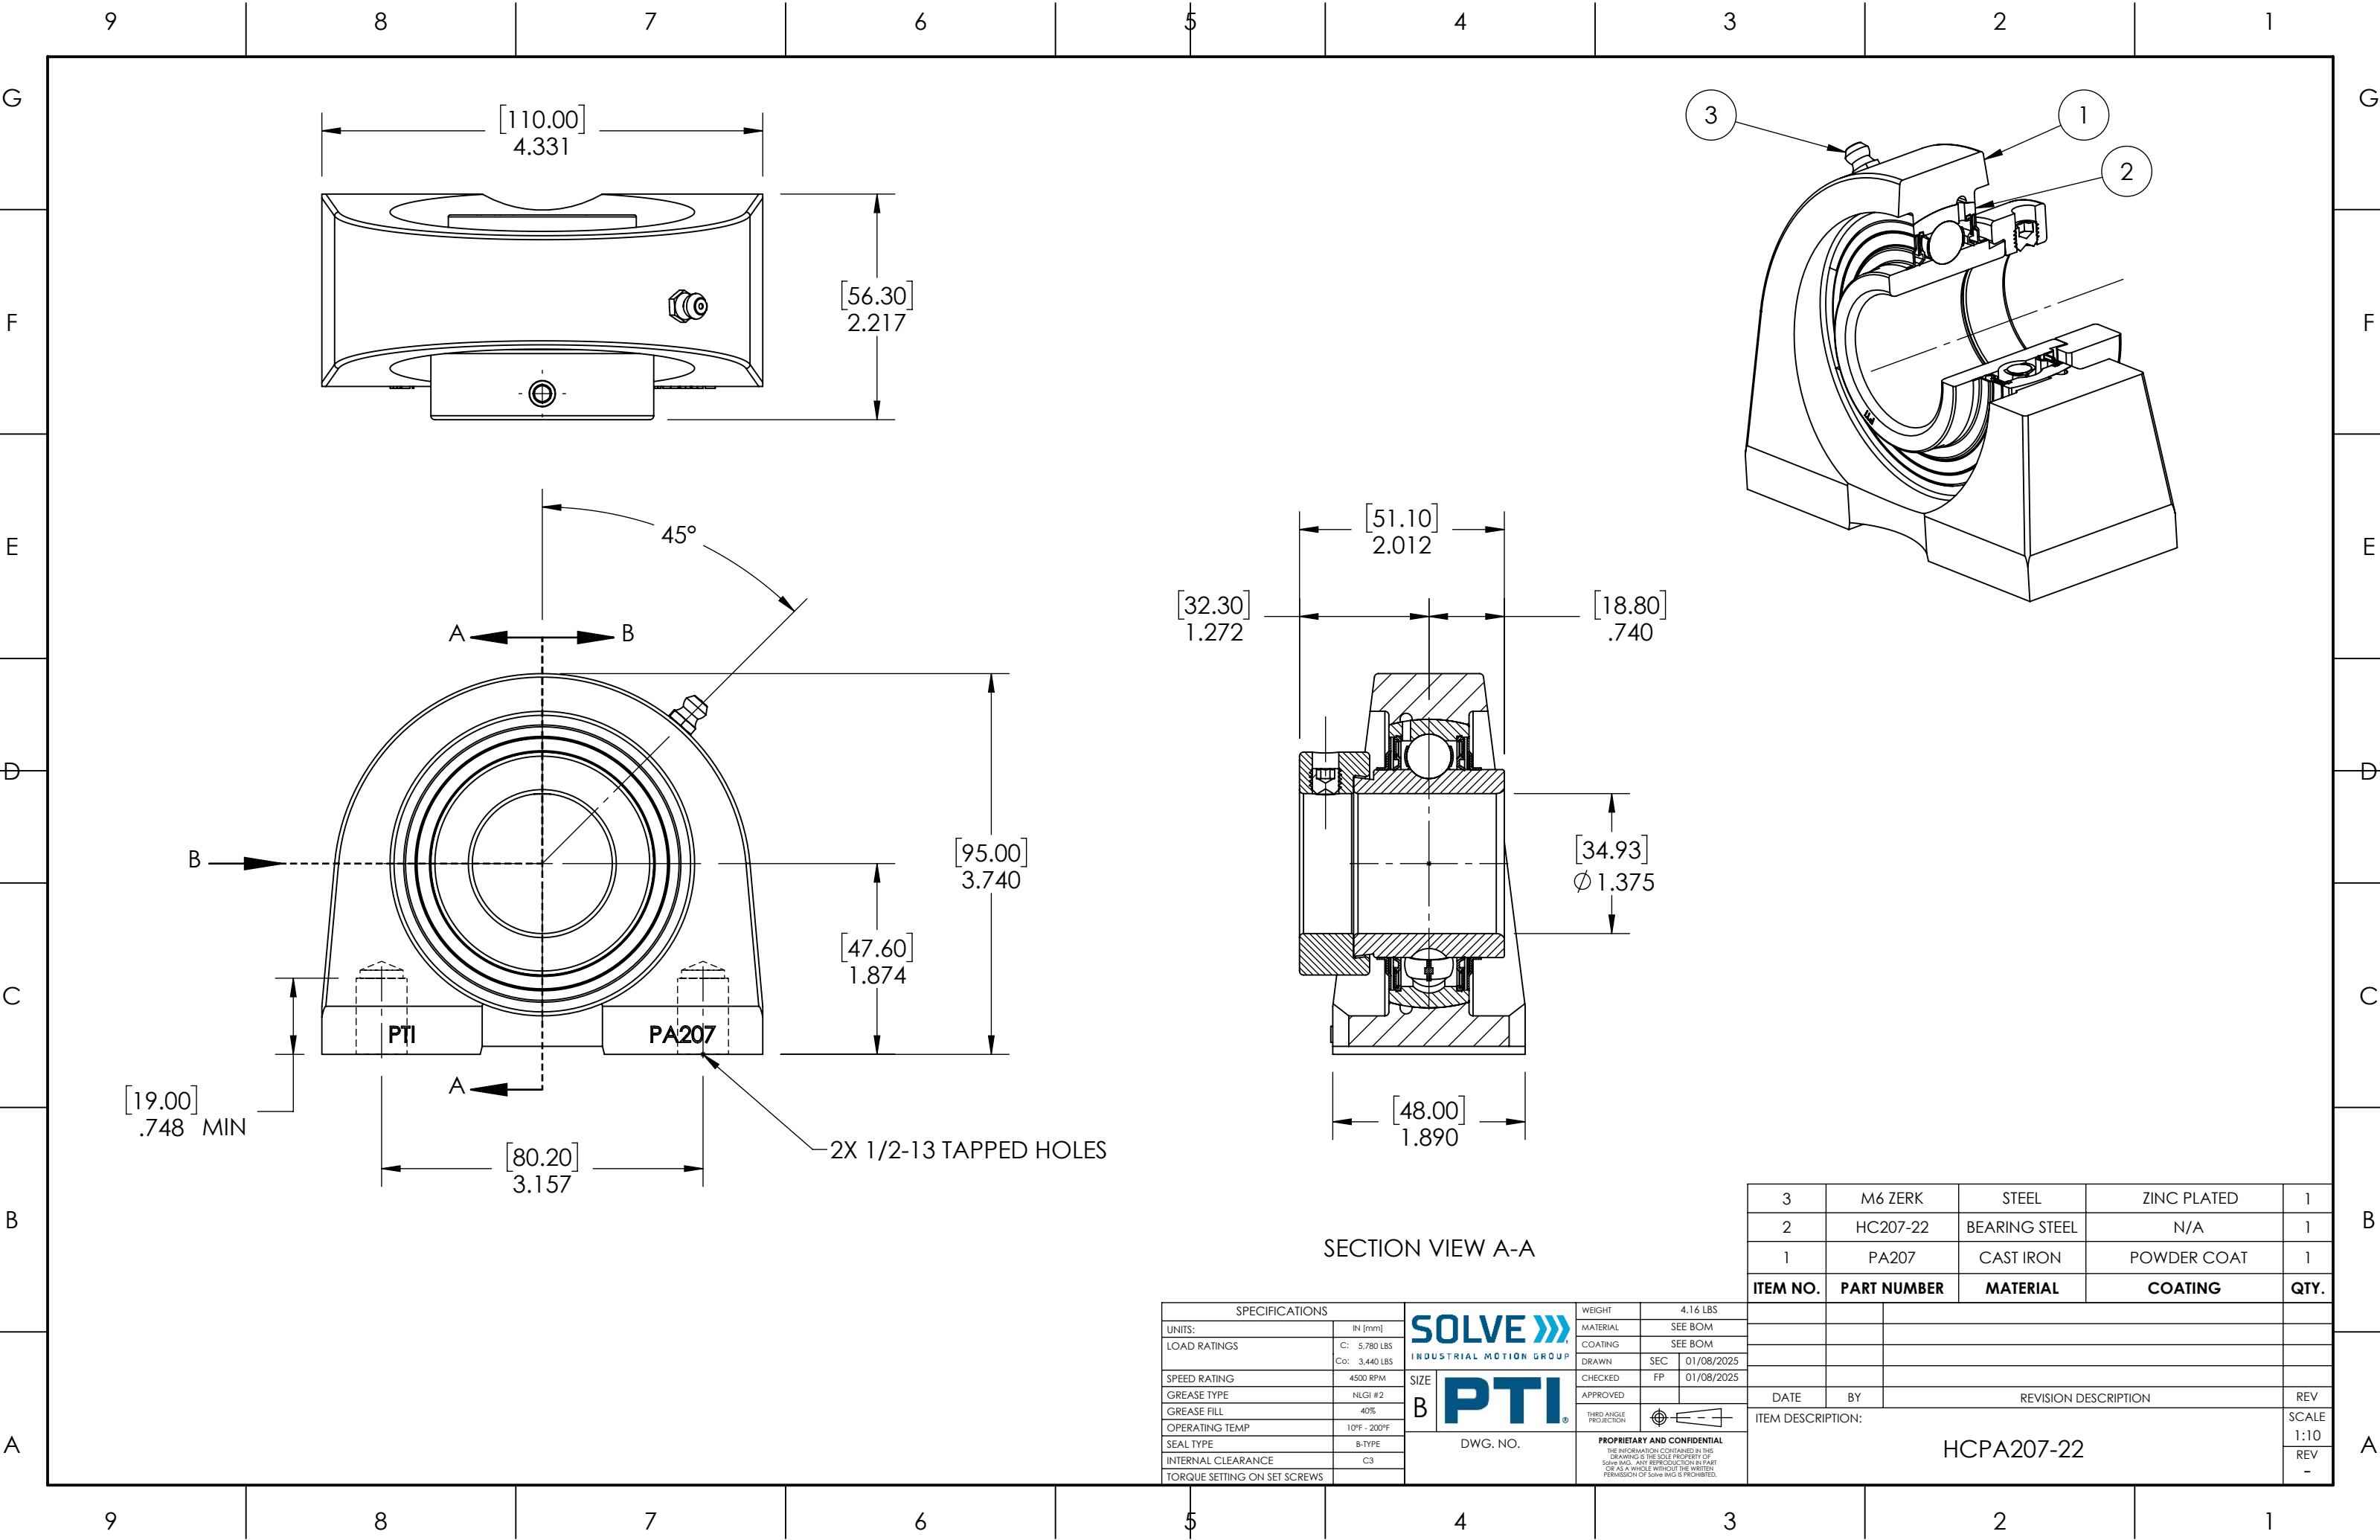




SECTION VIEW A-A

SPECIFICATIONS		SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT		4.16 LBS	
UNITS:	IN [mm]			MATERIAL		SEE BOM	
LOAD RATINGS	C: 5,780 LBS Co: 3,440 LBS	SIZE B  DWG. NO.		COATING		SEE BOM	
SPEED RATING	4500 RPM			DRAWN	SEC	01/08/2025	
GREASE TYPE	NLGI #2			CHECKED	FP	01/08/2025	
GREASE FILL	40%			APPROVED			
OPERATING TEMP	10°F - 200°F						
SEAL TYPE	B-TYPE	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.					
INTERNAL CLEARANCE	C3						
TORQUE SETTING ON SET SCREWS							

3	M6 ZERK	STEEL	ZINC PLATED	1
2	HC207-22	BEARING STEEL	N/A	1
1	PA207	CAST IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE BY REVISION DESCRIPTION REV				
ITEM DESCRIPTION:				SCALE
HCPA207-22				1:10
				REV
				-