

NICKEL PLATED HANGER UNITS




Seal Options



Black Oxide Bearing Inserts: BUCNPHA

» Overview of corrosion resistant products – pg. 47-48

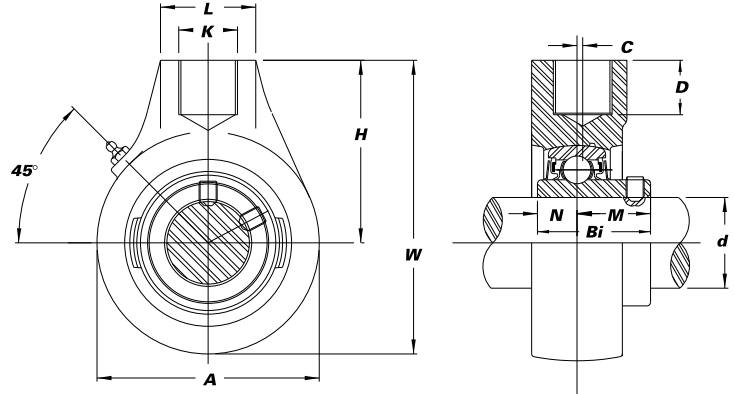

Unit No.	Shaft Dia.		Dimensions (in.) (mm)										Bearing No.	Housing No.	Weight (lbs.)
	d		A	W	C	H	L	D	K	Bi	N	M			
BUCNPHA 201-8 202-10 204-12 204	1/2 5/8 3/4 20		2 35/64 64	3 25/32 96	0	2 33/64 64	1 9/16 40	3/4 19.1	PF 3/4 -14	1.2205 31.0	0.5000 12.7	0.7205 18.3	BUC 201-8 202-10 204-12 204	NPHA 204	1.7
BUCNPHA 205-14 205 205-16	7/8 1	25	3 1/16 78	4 1/16 103	0	2 33/64 64	1 9/16 40	3/4 19.1	PF 3/4 -14	1.3386 34.0	0.5630 14.3	0.7756 19.7	BUC 205-14 205 205-16	NPHA 205	1.9
BUCNPHA 206-18 206 206-19 206-20	1 1/8 1 3/8 1 1/4 S	30	3 5/32 80	4 3/32 104	0	2 33/64 64	1 9/16 40	3/4 19.1	PF 3/4 -14	1.5000 38.1	0.6260 15.9	0.8740 22.2	BUC 206-18 206 206-19 206-20	NPHA 206	1.9
BUCNPHA 207-20 207-22 207 207-23	1 1/4 1 3/8 1 7/16	35	3 5/8 92	4 9/16 116	0	2 3/4 70	1 9/16 40	3/4 19.1	PF 3/4 -14	1.6890 42.9	0.6890 17.5	1.0000 25.4	BUC 207-20 207-22 207 207-23	NPHA 207	2.6
BUCNPHA 208-24 208	1 1/2	40	3 15/16 100	4 27/32 123	5/64 2	2 7/8 73	1 9/16 40	3/4 19.1	PF 3/4 -14	1.9370 49.2	0.7480 19.0	1.1890 30.2	BUC 208-24 208	NPHA 208	3.4
BUCNPHA 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4 45		4 1/4 108	5 11/32 136	13/64 5	3 15/64 82	1 7/8 48	13/16 21	PF 1 -11 1/2	1.9370 49.2	0.7480 19.0	1.1890 30.2	BUC 209-26 209-27 209-28 209	NPHA 209	3.9
BUCNPHA 210-30 210-31 210 210-32	1 7/8 1 15/16 2 S	50	4 21/32 118	5 19/32 142	13/64 5	3 17/64 83	1 7/8 48	13/16 21	PF 1 -11 1/2	2.0315 51.6	0.7480 19.0	1.2835 32.6	BUC 210-30 210-31 210 210-32	NPHA 210	4.6
UCXNPHA* 211 211-35	2 3/16	55	5 19/32 142	6 13/16 173	23/64 9	4 1/64 102	2 3/8 60	1 3/32 28	PF 1 1/4 -11 1/2	2.5630 65.1	1.0000 25.4	1.5630 39.7	UCX 11 211-35	NPHA 212	8.5
BUCNPHA 212-36 212 212-39	2 1/4 2 7/16	60	5 19/32 142	6 13/16 173	23/64 9	4 1/64 102	2 3/8 60	1 3/32 28	PF 1 1/4 -11 1/2	2.5630 65.1	1.0000 25.4	1.5630 39.7	BUC 212-36 212 212-39	NPHA 212	8.2
UCXNPHA* 214-43	2 11/16		6 17/32 166	7 7/8 200	3/8 9.5	4 39/64 117	2 3/4 70	1 1/4 32	PF 1 1/2 -11 1/2	3.0630 77.8	1.3110 33.3	1.7520 44.5	UCX 14-43	NPHA 215	13.2
BUCNPHA 215-47 215-48	2 15/16 3		6 17/32 166	7 7/8 200	3/8 9.5	4 39/64 117	2 3/4 70	1 1/4 32	PF 1 1/2 -11 1/2	3.0630 77.8	1.3110 33.3	1.7520 44.5	BUC 215-47 215-48	NPHA 215	12.2

*Bearing insert is not available in black oxide