

THERMOPLASTIC PILLOW BLOCKS



Seal Options



B-type





L3-type*

*Call for speed tolerances and available sizes

Eccentric locking collar. Optional bearing inserts: Stainless Steel-SNATP

» Overview of corrosion resistant products – pg. 47-48

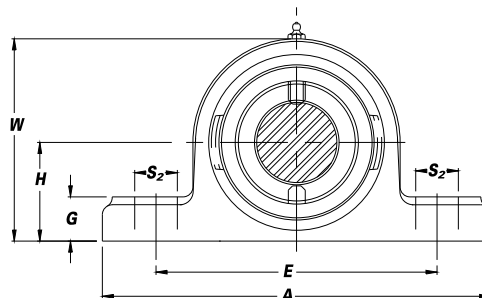

Unit No.	Shaft Dia.		Dimensions (in.) (mm)											Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	<i>d</i>		<i>H</i>	<i>A</i>	<i>E</i>	<i>B</i>	<i>S</i> ₂	<i>S</i> ₁	<i>G</i>	<i>W</i>	<i>Bi</i>	<i>N</i>	<i>M</i>				
SNATP with Stainless Steel Bearing Inserts																	
SNATP 204-12 204	³ / ₄	20	1 ⁵ / ₁₆ 33.3	5 127	3 ³ / ₄ 95	1 ¹ / ₂ 38	⁹ / ₁₆ 14	⁷ / ₁₆ 11	⁹ / ₁₆ 14	2 ¹⁹ / ₃₂ 66	1.5433 39.2	0.5000 12.7	0.6693 17.0	³ / ₈	SNA 204-12 204	TP 204	.9
SNATP 205-14 205 205-16	⁷ / ₈ 1	25	1 ⁷ / ₁₆ 36.5	5 ¹ / ₂ 140	4 ¹ / ₈ 105	1 ¹ / ₂ 38	⁹ / ₁₆ 14	⁷ / ₁₆ 11	⁹ / ₁₆ 14	2 ¹⁹ / ₁₆ 71	1.6220 41.2	0.5630 14.3	0.6850 17.4	³ / ₈	SNA 205-14 205 205-16	TP 205	.9
SNATP 206 206-19 206-20	¹³ / ₁₆ 1 ¹ / ₄ S	30	1 ¹¹ / ₁₆ 42.9	6 ¹³ / ₃₂ 163	4 ¹¹ / ₁₆ 119	1 ¹³ / ₁₆ 46	²³ / ₃₂ 18	⁹ / ₁₆ 14	¹¹ / ₁₆ 18	3 ¹⁹ / ₆₄ 84	1.8110 46.0	0.6260 15.9	0.7165 18.2	¹ / ₂	SNA 206 206-19 206-20	TP 206	1.3
SNATP 207-20 207-22 207 207-23	¹ / ₄ ¹³ / ₈ ¹ / ₁₆	35	1 ⁷ / ₈ 47.6	6 ⁵ / ₈ 168	5 127	1 ²⁹ / ₃₂ 48	²³ / ₃₂ 18	⁹ / ₁₆ 14	¹¹ / ₁₆ 18	3 ¹¹ / ₁₆ 94	1.9606 49.8	0.6890 17.5	0.7402 18.8	¹ / ₂	SNA 207-20 207-22 207 207-23	TP 207	1.9
SNATP 208-24 208	¹ / ₂	40	1 ¹⁵ / ₁₆ 49.2	7 ¹ / ₄ 184	5 ⁷ / ₁₆ 137	2 ¹ / ₈ 54	²³ / ₃₂ 18	⁹ / ₁₆ 14	²⁵ / ₃₂ 20	3 ²⁹ / ₃₂ 99	2.1220 53.9	0.7480 19.0	0.8425 21.4	¹ / ₂	SNA 208-24 208	TP 208	2.4