

NICKEL PLATED HANGER UNITS




Seal Options



B-type

Optional bearing inserts: Stainless Steel-SUCNPHA Hard Chrome Coated-CUCNPHA

- Available with locking collar bearings
- Overview of corrosion resistant products – pg. 47-48

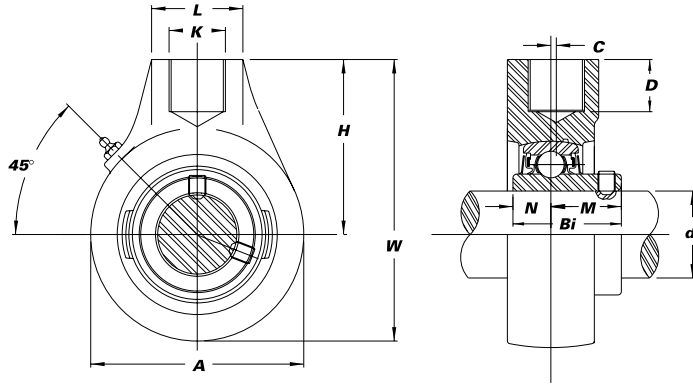

Unit No.	Shaft Dia.		Dimensions (in.) (mm)										Bearing No.	Housing No.	Weight (lbs.)
	d		A	W	C	H	L	D	K	Bi	N	M			
	(in.) (mm)														
SUCNPHA with Stainless Steel Bearing Inserts															
SUCNPHA 201-8	1/2												SUC 201-8		
202-10	5/8	233/64	325/32	0	233/64	19/16	3/4	PF 3/4	1.2205	0.5000	0.7205		SUC 202-10	NPHA 204	1.7
204-12	3/4	64	96		64	40	19.1	-14	31.0	12.7	18.3		SUC 204-12		
204	20														
SUCNPHA 205-14	7/8												SUC 205-14		
205	25	31/16	41/16	0	233/64	19/16	3/4	PF 3/4	1.3386	0.5630	0.7756		SUC 205-14	NPHA 205	1.9
205-16	1	78	103		64	40	19.1	-14	34.0	14.3	19.7		SUC 205-16		
SUCNPHA 206-18	1 1/8												SUC 206-18		
206	30	35/32	43/32	0	233/64	19/16	3/4	PF 3/4	1.5000	0.6260	0.8740		SUC 206-18	NPHA 206	1.9
206-19	1 3/16	80	104		64	40	19.1	-14	38.1	15.9	22.2		SUC 206-19		
206-20	1 1/4 S												SUC 206-20		
SUCNPHA 207-20	1 1/4												SUC 207-20		
207-21	1 3/16												SUC 207-21		
207-22	1 3/8	35	92	116	0	23/4	19/16	3/4	PF 3/4	1.6890	0.6890	1.0000	SUC 207-22	NPHA 207	2.6
207						70	40	19.1	-14	42.9	17.5	25.4	SUC 207		
207-23	1 7/16												SUC 207-23		
SUCNPHA 208-24	1 1/2												SUC 208-24		
208	40	315/16	427/32	5/64	27/8	19/16	3/4	PF 3/4	1.9370	0.7480	1.1890		SUC 208-24	NPHA 208	3.4
		100	123	2	73	40	19.1	-14	49.2	19.0	30.2		SUC 208		
SUCNPHA 209-27	1 11/16												SUC 209-27		
209-28	1 3/4	41/4	511/32	13/64	315/64	17/8	13/16	PF 1	1.9370	0.7480	1.1890		SUC 209-28	NPHA 209	3.9
209	45	108	136	5	82	48	21	-11 1/2	49.2	19.0	30.2		SUC 209		
SUCNPHA 210-31	1 15/16												SUC 210-31		
210	50	421/32	519/32	13/64	317/64	17/8	13/16	PF 1	2.0315	0.7480	1.2835		SUC 210-31	NPHA 210	4.6
210-32	2 S	118	142	5	83	48	21	-11 1/2	51.6	19.0	32.6		SUC 210-32		
SUCNPHA 212-36	2 1/4												SUC 212-36		
212-39	2 7/16	519/32	613/16	23/64	41/64	23/8	13/32	PF 1 1/4	2.5630	1.0000	1.5630		SUC 212-36	NPHA 212	8.2
		142	173	9	102	60	28	-11 1/2	65.1	25.4	39.7		SUC 212-39		
CUCNPHA with Hard Chrome Coated Bearing Inserts															
CUCNPHA 204-12	3/4												CUC 204-12		
204	20	233/64	325/32	0	233/64	19/16	3/4	PF 3/4	1.2205	0.5000	0.7205		CUC 204-12	NPHA 204	1.7
		64	96		64	40	19.1	-14	31.0	12.7	18.3		CUC 204		
CUCNPHA 205-14	7/8												CUC 205-14		
205	25	31/16	41/16	0	233/64	19/16	3/4	PF 3/4	1.3386	0.5630	0.7756		CUC 205-14	NPHA 205	1.9
205-16	1	78	103		64	40	19.1	-14	34.0	14.3	19.7		CUC 205-16		
CUCNPHA 206-18	1 1/8												CUC 206-18		
206	30	35/32	43/32	0	233/64	19/16	3/4	PF 3/4	1.5000	0.6260	0.8740		CUC 206-18	NPHA 206	1.9
206-19	1 3/16	80	104		64	40	19.1	-14	38.1	15.9	22.2		CUC 206-19		
206-20	1 1/4 S												CUC 206-20		
CUCNPHA 207-20	1 1/4												CUC 207-20		
207-22	1 3/8	35	92	116	0	23/4	19/16	3/4	PF 3/4	1.6890	0.6890	1.0000	CUC 207-22	NPHA 207	2.6
207						70	40	19.1	-14	42.9	17.5	25.4	CUC 207		
207-23	1 7/16												CUC 207-23		
CUCNPHA 208-24	1 1/2												CUC 208-24		
208	40	315/16	427/32	5/64	27/8	19/16	3/4	PF 3/4	1.9370	0.7480	1.1890		CUC 208-24	NPHA 208	3.4
		100	123	2	73	40	19.1	-14	49.2	19.0	30.2		CUC 208		