

UCHA HANGER UNITS



Seal Options



B-type





L3-type*

*Call for speed tolerances and available sizes

Set screw lock.

- » Cast iron housing
- » Wide inner race bearing
- » Available with eccentric locking collar bearing

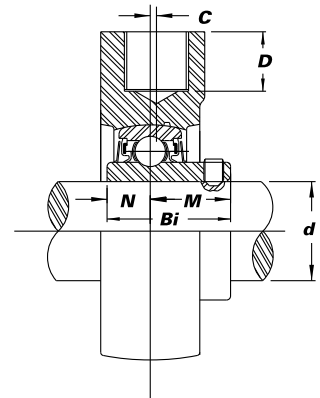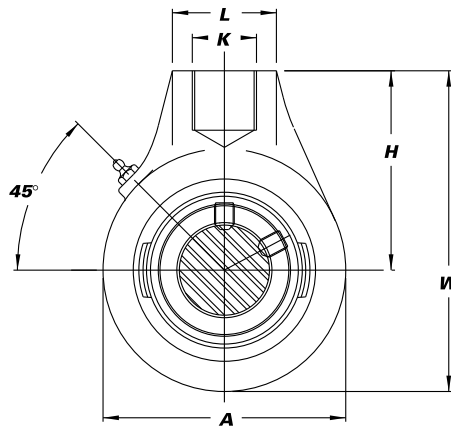

Unit No.	Shaft Dia.		Dimensions (in.) (mm)										Bearing No.	Housing No.	Weight (lbs.)
	d		A	W	C	H	L	D	K	Bi	N	M			
UCHA 201		12											UC 201		
201-8	1/2												201-8		
202		15	233/64	325/32	0	233/64	19/16	3/4	PF 3/4	1.2205	0.5000	0.7205	202	HA 204	1.7
202-10	5/8		64	96		64	40	19.1	-14	31.0	12.7	18.3	202-10		
203		17											203		
204-12	3/4												204-12		
204		20											204		
UCHA 205-14	7/8												UC 205-14		
205-15	15/16												205-15	HA 205	1.9
205		25	31/16	41/16	0	233/64	19/16	3/4	PF 3/4	1.3386	0.5630	0.7756	205		
205-16	1		78	103		64	40	19.1	-14	34.0	14.3	19.7	205-16		
UCHA 206-17	1 1/16												UC 206-17		
206-18	1 1/8												206-18	HA 206	1.9
206		30	35/32	43/32	0	233/64	19/16	3/4	PF 3/4	1.5000	0.6260	0.8740	206		
206-19	1 3/16		80	104		64	40	19.1	-14	38.1	15.9	22.2	206-19		
206-20	1 1/4												206-20		
UCHA 207-20	1 1/4												UC 207-20		
207-21	1 5/16												207-21	HA 207	2.6
207-22	1 3/8		35/8	49/16	0	23/4	19/16	3/4	PF 3/4	1.6890	0.6890	1.0000	207-22		
207		35	92	116		70	40	19.1	-14	42.9	17.5	25.4	207		
207-23	1 7/16												207-23		
UCHA 208-24	1 1/2												UC 208-24		
208-25	1 9/16												208-25	HA 208	3.4
208		40	315/16	427/32	5/64	27/8	19/16	3/4	PF 3/4	1.9370	0.7480	1.1890	208		
UCHA 209-26	1 5/8												UC 209-26		
209-27	1 11/16												209-27	HA 209	3.9
209-28	1 3/4		41/4	511/32	13/64	315/64	17/8	13/16	PF 1	1.9370	0.7480	1.1890	209-28		
209		45	108	136	5	82	48	21	-11 1/2	49.2	19.0	30.2	209		
UCHA 210-30	1 7/8												UC 210-30		
210-31	1 15/16												210-31	HA 210	4.6
210		50	421/32	519/32	13/64	317/64	17/8	13/16	PF 1	2.0315	0.7480	1.2835	210		
210-32	2S		118	142	5	83	48	21	-11 1/2	51.6	19.0	32.6	210-32		
UCHA 211-34	2 1/8												UC X11-34		
211		55	519/32	613/16	23/64	41/64	29/8	13/32	PF 1 1/4	2.5630	1.0000	1.5630	X11	HA 212	8.5
211-35	2 3/16		142	173	9	102	60	28	-11 1/2	65.1	25.4	39.7	X11-35		
UCHA 212-36	2 1/4												UC 212-36		
212		60	519/32	613/16	23/64	41/64	29/8	13/32	PF 1 1/4	2.5630	1.0000	1.5630	212	HA 212	8.2
212-38	2 3/8		142	173	9	102	60	28	-11 1/2	65.1	25.4	39.7	212-38		
212-39	2 7/16												212-39		
UCHA 214-43	2 11/16												UC X14-43		
214		70	617/32	77/8	3/8	439/64	29/4	1 1/4	PF 1 1/2	3.0630	1.3110	1.7520	X14	HA 215	13.2
UCHA 215-47	2 15/16												UC 215-47		
215		75	617/32	77/8	3/8	439/64	29/4	1 1/4	PF 1 1/2	3.0630	1.3110	1.7520	215	HA 215	12.2
215-48	3		166	200	9.5	117	70	32	-11 1/2	77.8	33.3	44.5	215-48		

Interchange Page 95