


“H” PITCH TIMING PULLEY DIMENSIONS

The Timing Pulleys listed below are all stock sizes. The figure following the type sketch letter in the “Type” column indicates the construction: (1-Solid, 2-Web, 3-Spoked), and the letter F indicates the sprocket has flanges.

**For H Timing Belts.
See page 128.
Order TB bushings separately
Stock Bushings Located
on Pages 87-88.**

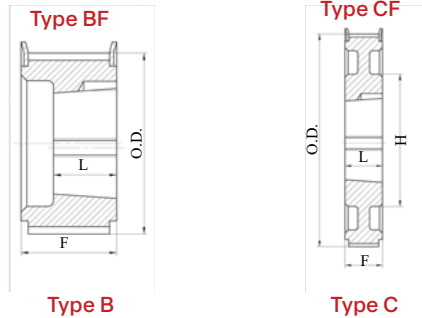

For belts 3 inches wide (300) * 1/2-inch pitch (H)						Face Width (F) = 3-3/8"				
Part Number	No. of Teeth	Pitch Dia.	O.D.		Bore	Type	Dimensions, Inches		Max. Bore	Wt.
			Pulley	Flange			L	H		
P16H300-1108	16	2.54	2.49	2.76	1108	B1F	7/8	***	1 1/8	2.00
P18H300-1215	18	2.86	2.81	3.07	1215	B1F	1 1/2	***	1 1/4	2.05
P20H300-1215	20	3.18	3.13	3.43	1215	B1F	1 1/2	***	1 1/4	3.05
P22H300-1615	22	3.50	3.45	3.74	1615	B1F	1 1/2	***	1 5/8	3.50
P24H300-2012	24	3.82	3.77	4.09	2012	B1F	1 1/4	***	2	4.05
P26H300-2012	26	4.14	4.09	4.45	2012	B1F	1 1/4	***	2	4.60
P28H300-2012	28	4.45	4.40	4.69	2012	B1F	1 1/4	***	2	5.40
P30H300-2012	30	4.77	4.72	5.00	2012	B1F	1 1/4	***	2	6.45
P32H300-2517	32	5.09	5.04	5.31	2517	B1F	1 3/4	***	2 1/2	7.25
P40H300-2517	40	6.36	6.31	6.65	2517	B1F	1 3/4	***	2 1/2	11.40
P48H300-3020	48	7.64	7.59	7.95	3020	B1F	2	***	3	19.25
P60H300-3020	60	9.55	9.50	***	3020	C2	2	6 7/64	3	22.60
P72H300-3020	72	11.46	11.41	***	3020	C2	2	6 7/64	3	30.70
P84H300-3020	84	13.37	13.32	***	3020	C3	2	6 7/64	3	37.45
P96H300-3535	96	15.28	15.23	***	3535	C3	3 1/2	6 57/64	3 1/2	51.84
P120H300-3535	120	19.10	19.05	***	3535	C3	3 1/2	6 57/64	3 1/2	75.08