
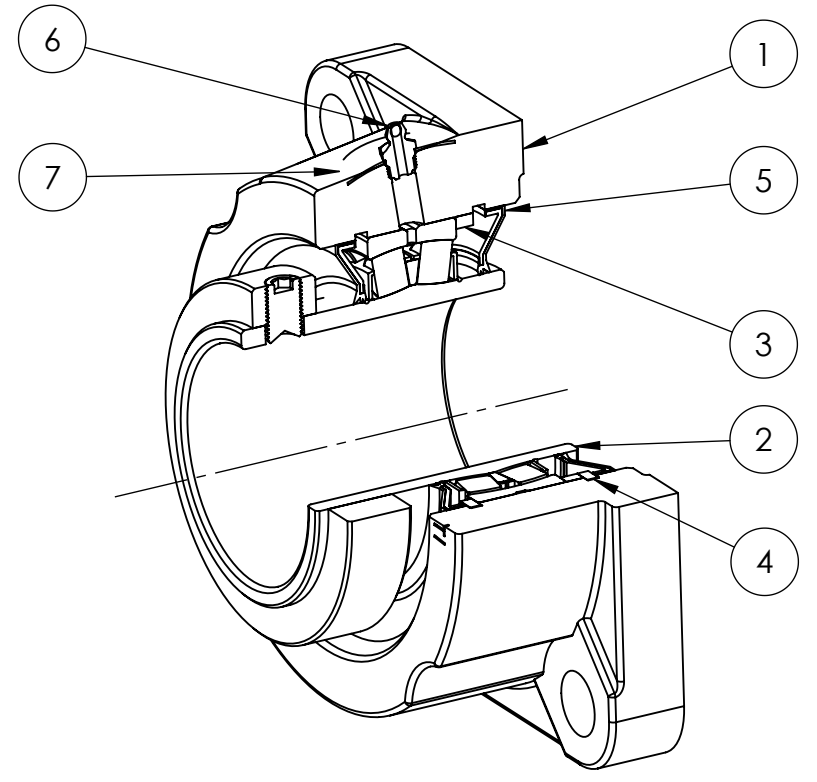
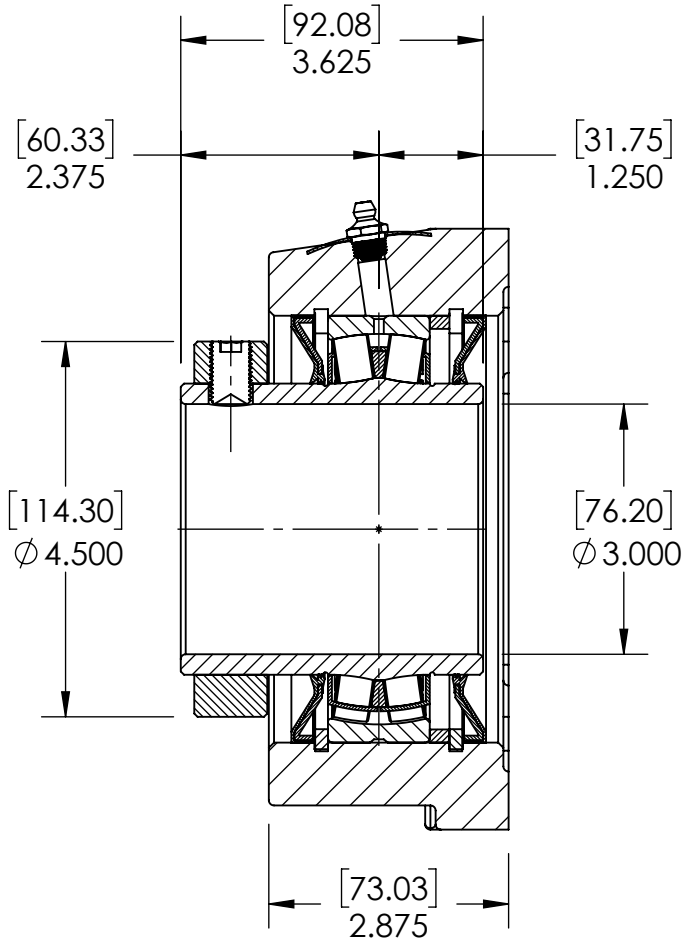
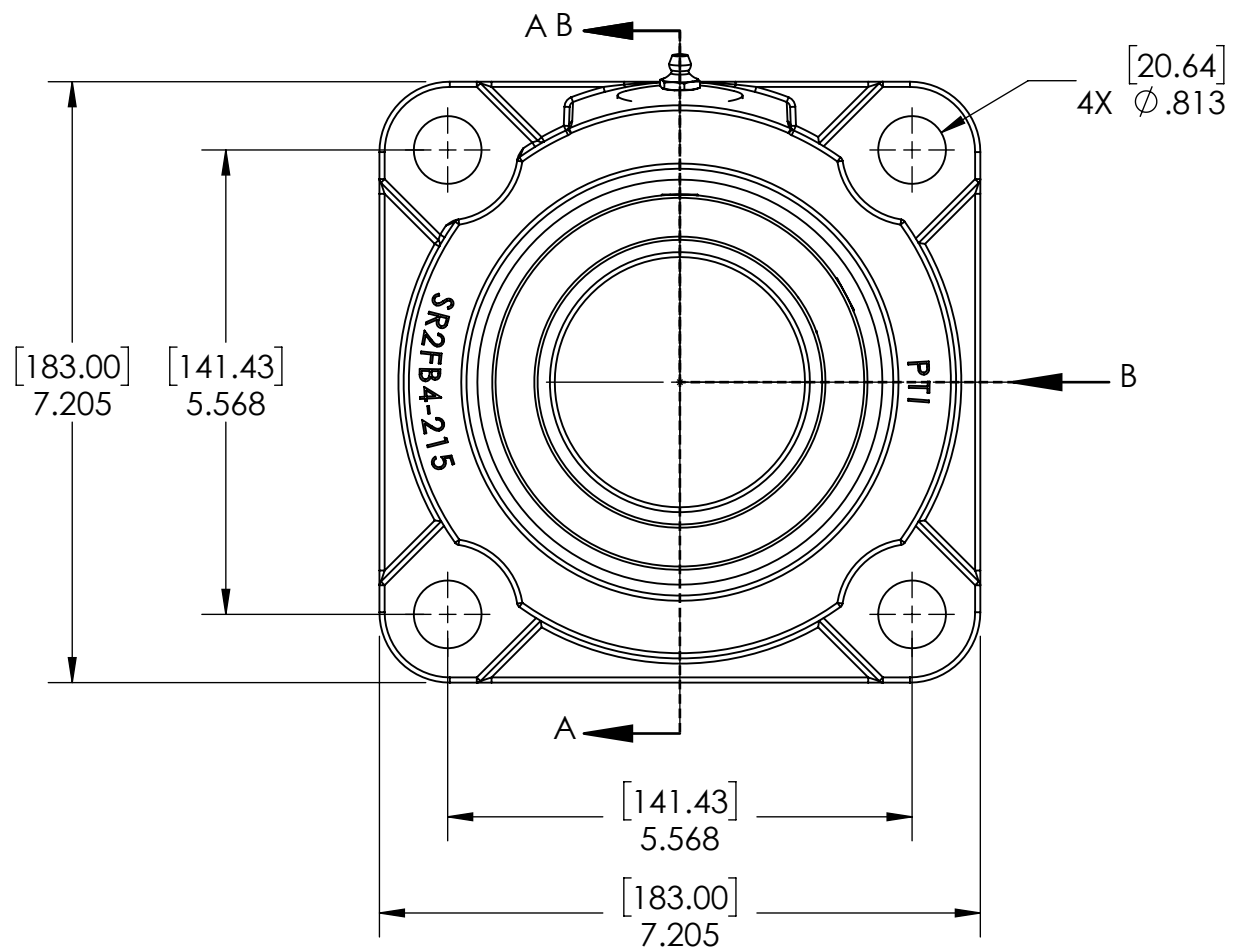
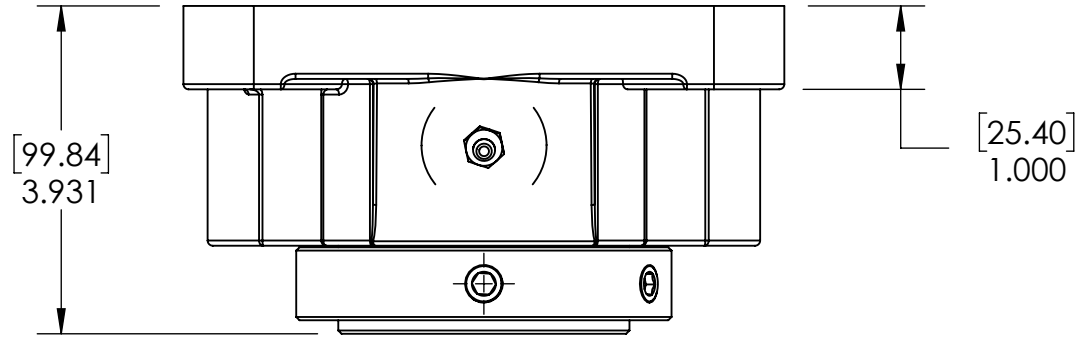
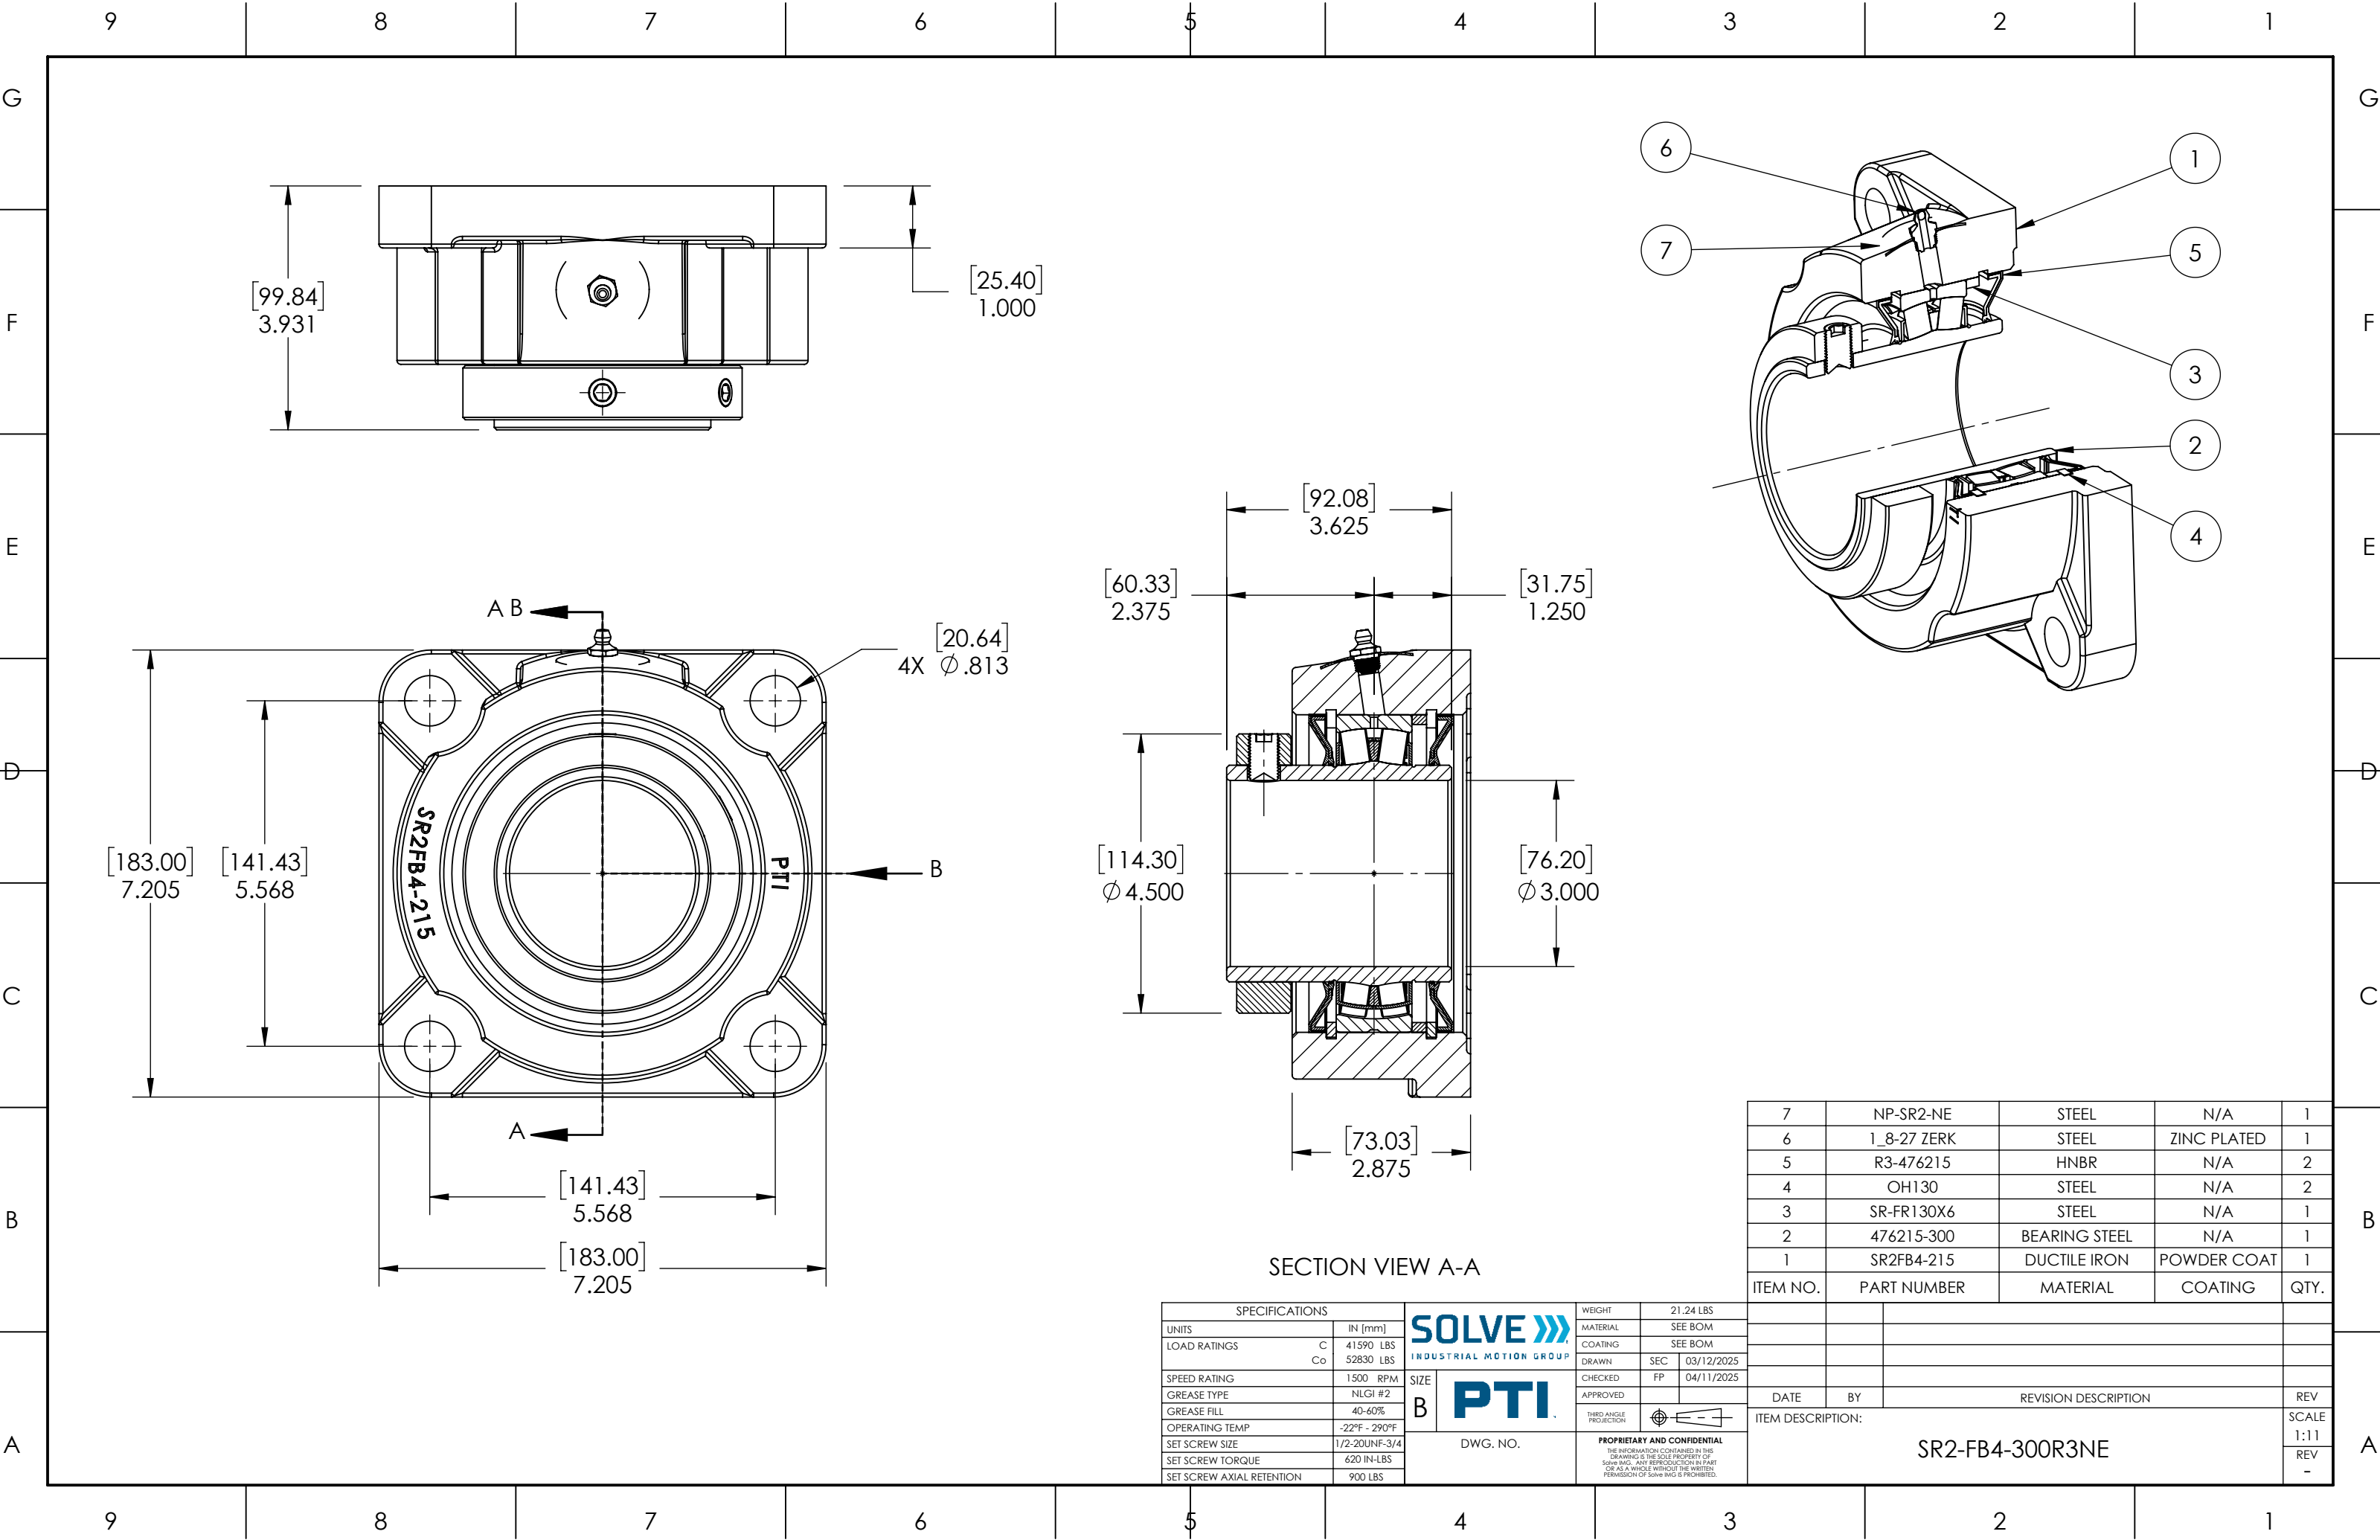




SECTION VIEW A-A

SPECIFICATIONS		SOLVE 		WEIGHT		21.24 LBS	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM		
LOAD RATINGS	C 41590 LBS Co 52830 LBS			COATING	SEE BOM		
SPEED RATING	1500 RPM	SIZE	B	DRAWN	SEC	03/12/2025	
GREASE TYPE	NLGI #2	PTI		CHECKED	FP	04/11/2025	
GREASE FILL	40-60%			APPROVED			
OPERATING TEMP	-22°F - 290°F	DWG. NO.		THIRD ANGLE PROJECTION		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW SIZE	1/2-20UNF-3/4						
SET SCREW TORQUE	620 IN-LBS						
SET SCREW AXIAL RETENTION	900 LBS						

7	NP-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476215	HNBR	N/A	2
4	OH130	STEEL	N/A	2
3	SR-FR130X6	STEEL	N/A	1
2	476215-300	BEARING STEEL	N/A	1
1	SR2FB4-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
5				
5				
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION:				SCALE
SR2-FB4-300R3NE				1:11
				REV
				-