
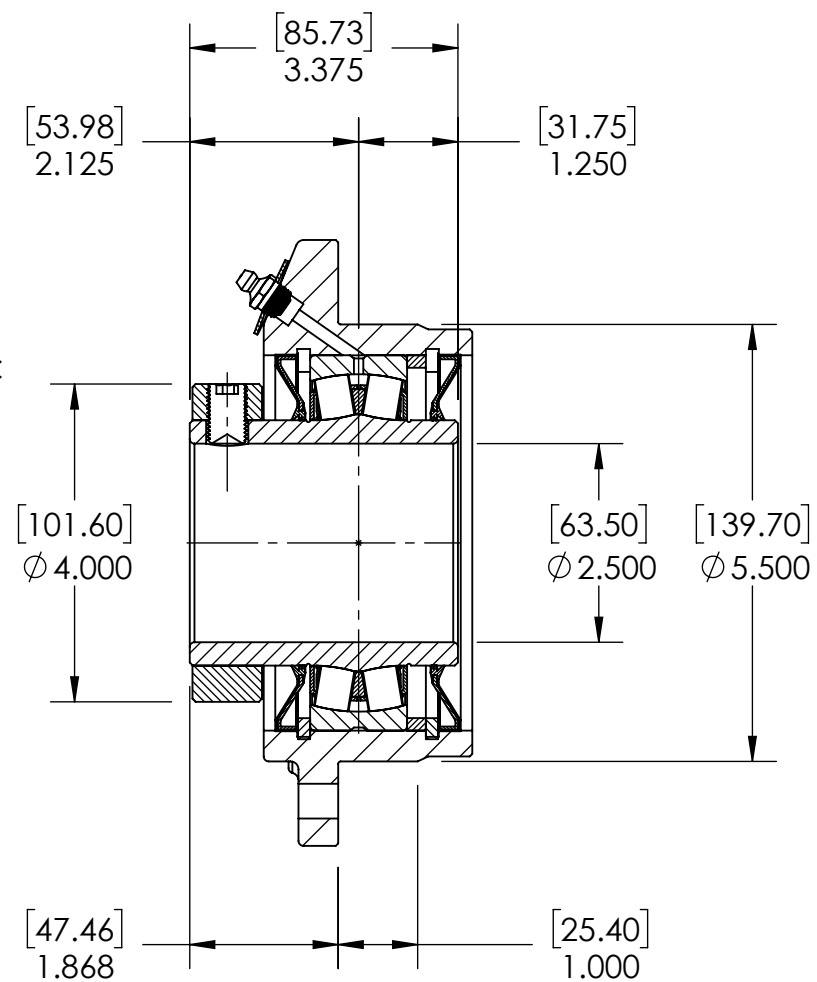
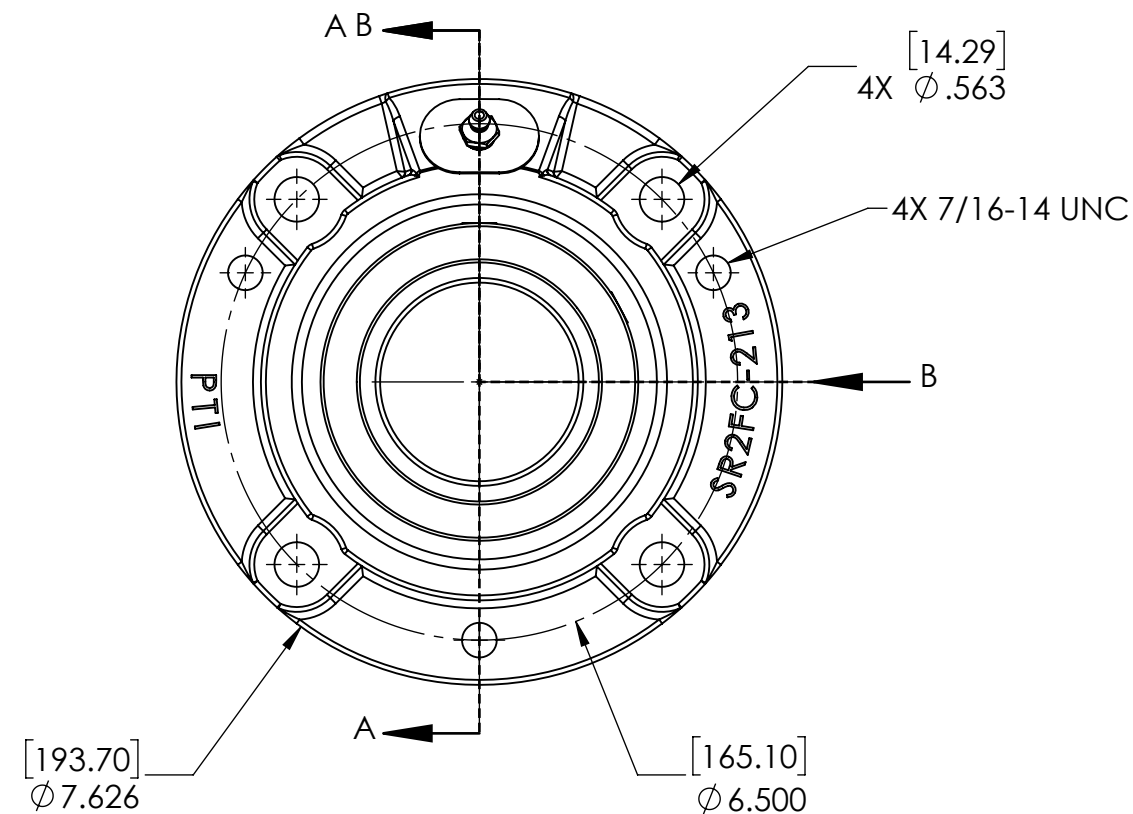
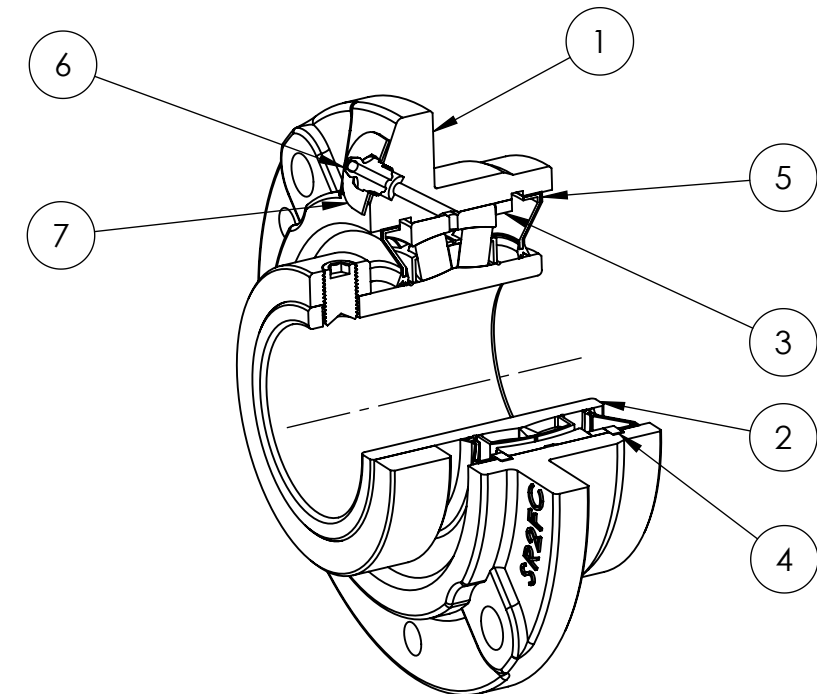


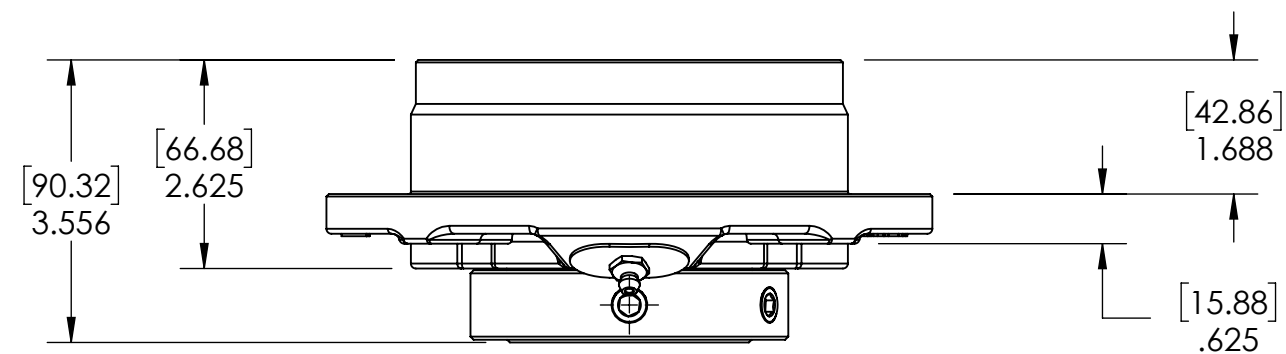

SECTION VIEW A-A

SPECIFICATIONS			WEIGHT	13.87 LBS
UNITS	IN [mm]		MATERIAL	SEE BOM
LOAD RATINGS	C 37090 LBS Co 46090 LBS	SIZE B 	COATING	SEE BOM
SPEED RATING	1700 RPM		DRAWN	SEC 03/14/20
GREASE TYPE	NLGI #2		CHECKED	FP 05/05/20
GREASE FILL	40-60%		APPROVED	
OPERATING TEMP	-22°F - 290°F		THIRD ANGLE PROJECTION	
SET SCREW SIZE	1/2-20UNF-3/4	DWG. NO.	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS			
SET SCREW AXIAL RETENTION	900 LBS			

7	NPS-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476213	HNBR	N/A	2
4	OH120	STEEL	N/A	2
3	SR-FR120X6	STEEL	N/A	1
2	476213-208	BEARING STEEL	N/A	1
1	SR2FC-213	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

25			
25			
	DATE	BY	REVISION DESCRIPTION
-	ITEM DESCRIPTION:		
	SR2-FC-208R3NE		
	SCALE		
	1:11		
	REV		
	-		