
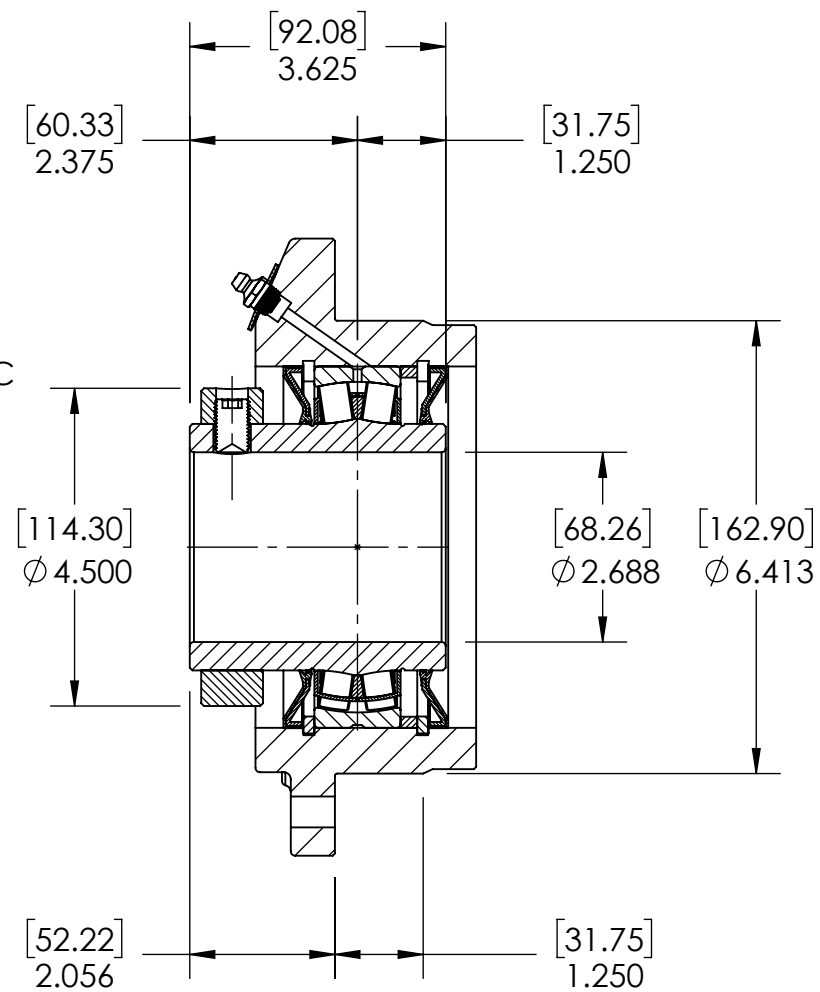
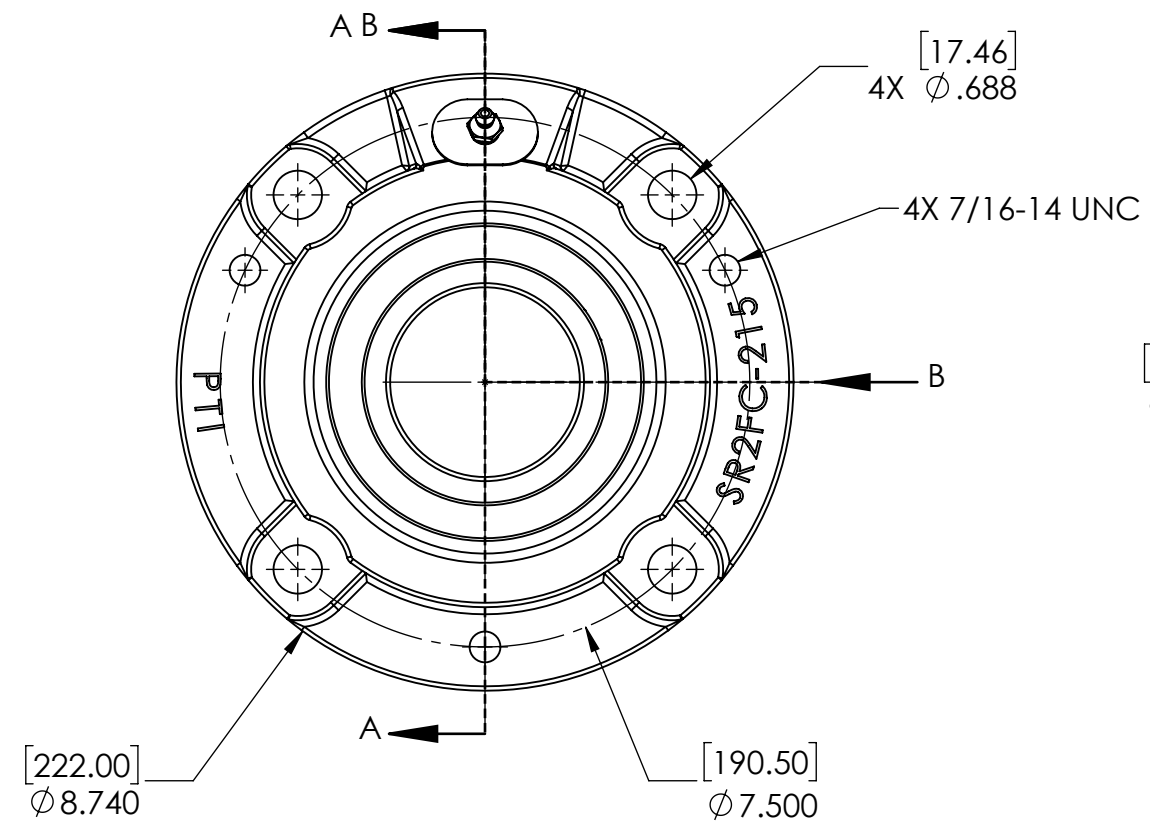
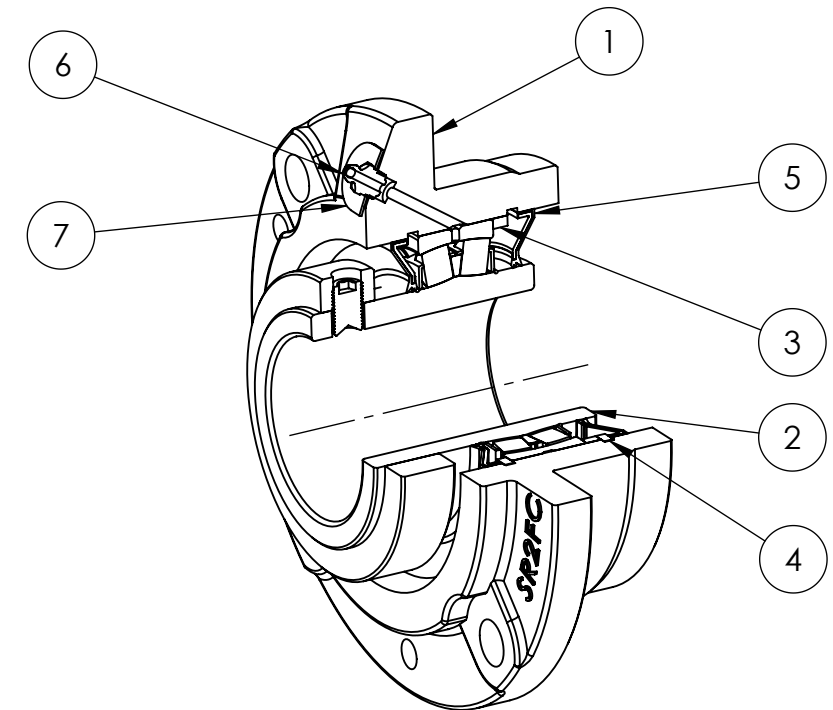


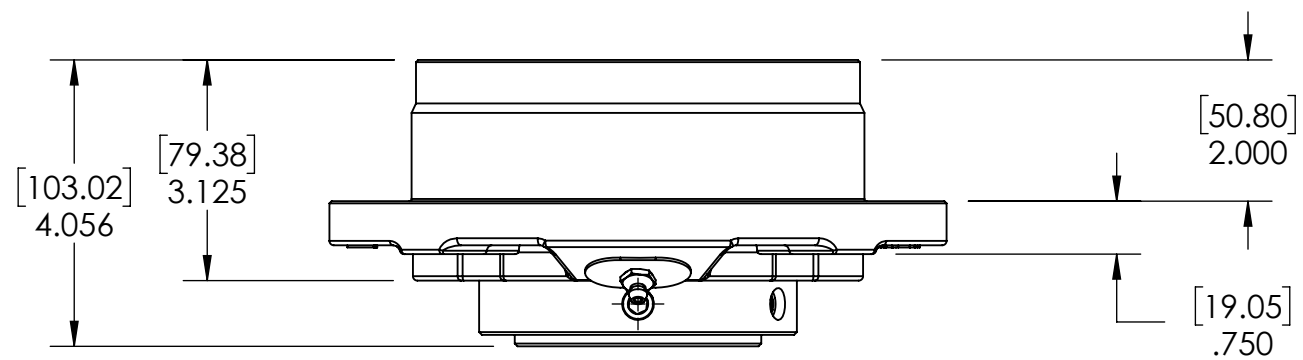

SECTION VIEW A-A

7	NPS-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476215	HNBR	N/A	2
4	OH130	STEEL	N/A	2
3	SR-FR130X6	STEEL	N/A	1
2	476215-211	BEARING STEEL	N/A	1
1	SR2FC-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		 	WEIGHT	22.70 LBS							
UNITS	IN [mm]		MATERIAL	SEE BOM							
LOAD RATINGS	C 41590 LBS Co 52830 LBS		COATING	SEE BOM							
SPEED RATING	1500 RPM		DRAWN	SEC 03/14/2025							
GREASE TYPE	NLG1 #2	CHECKED	FP 05/05/2025								
GREASE FILL	40-60%	APPROVED									
OPERATING TEMP	-22°F - 290°F	THIRD ANGLE PROJECTION									
SET SCREW SIZE	1/2"-20UNF-3/4"	DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		DATE BY REVISION DESCRIPTION					REV
SET SCREW TORQUE	620 IN-LBS					SR2-FC-211R3NE					SCALE
SET SCREW AXIAL RETENTION	900 LBS										1:10
											REV
											-