
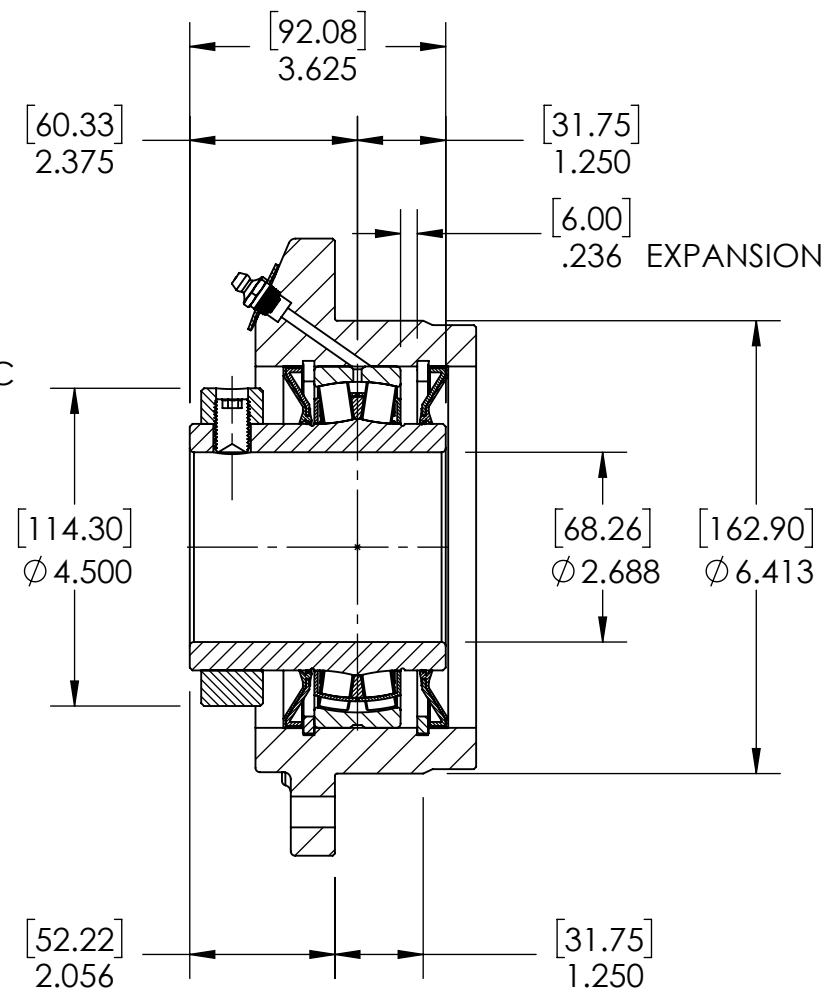
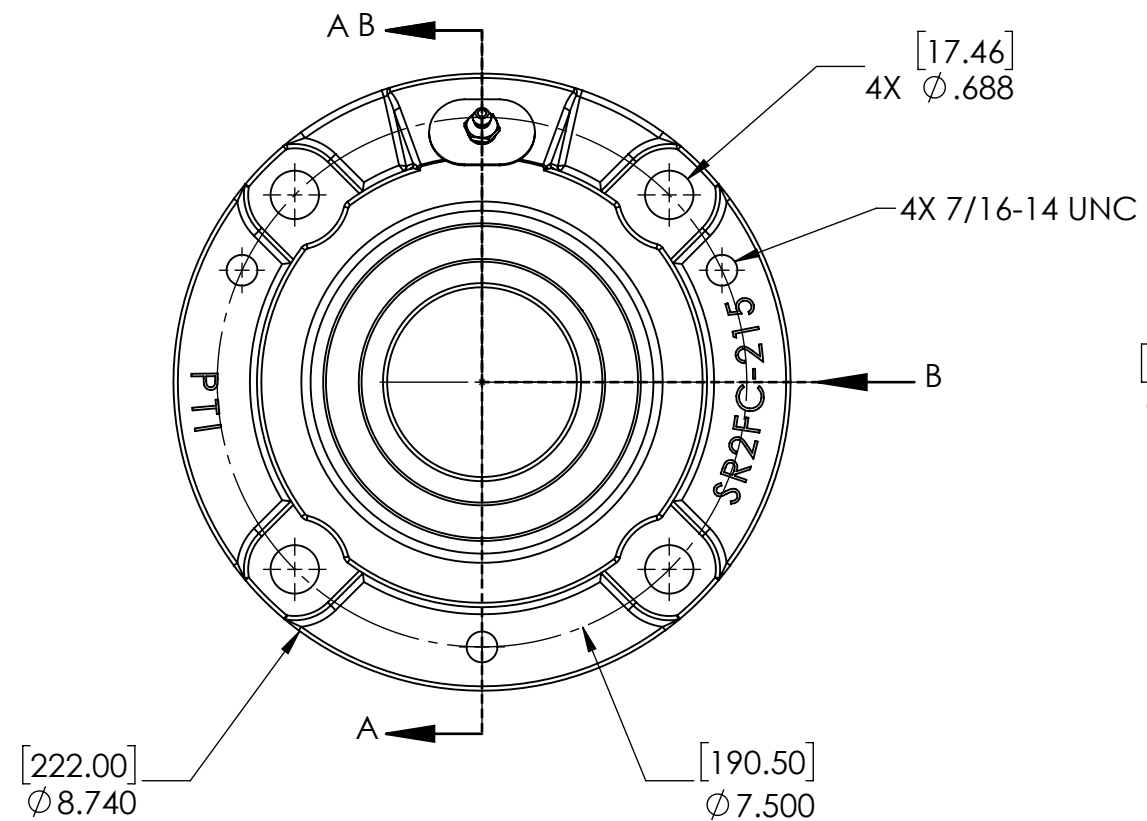
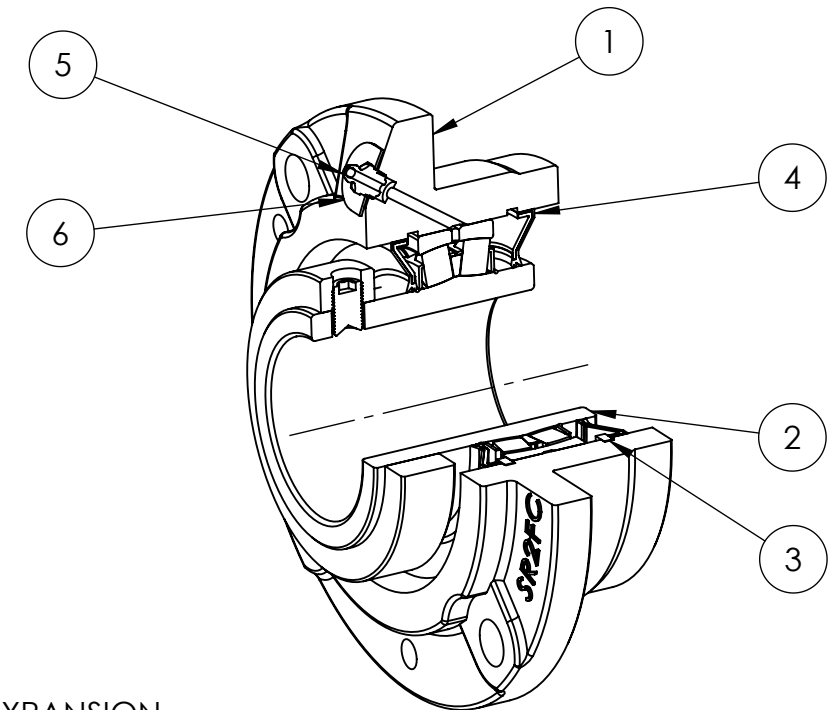


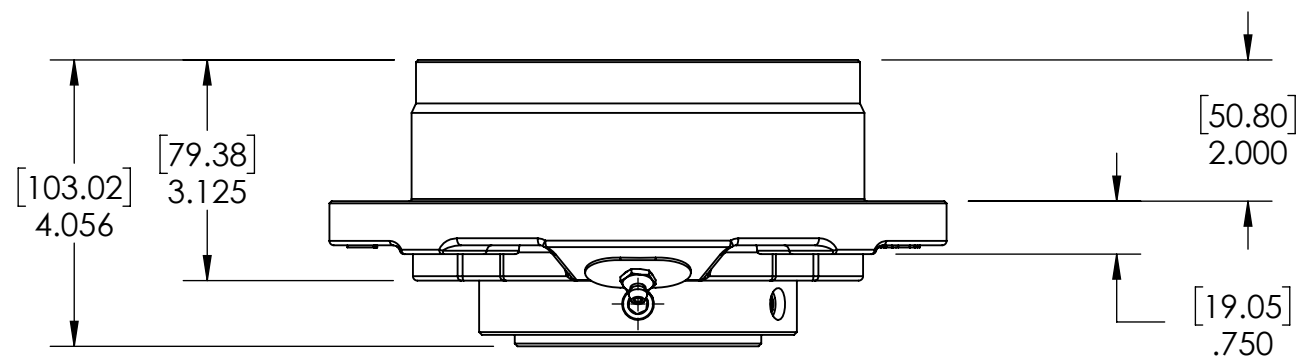

SECTION VIEW A-A

SPECIFICATIONS			WEIGHT	22.54 LBS
UNITS	IN [mm]		MATERIAL	SEE BOM
LOAD RATINGS	C 41590 LBS Co 52830 LBS	SIZE B 	COATING	SEE BOM
SPEED RATING	1500 RPM		DRAWN	SEC 03/14/20
GREASE TYPE	NLGI #2		CHECKED	FP 05/05/20
GREASE FILL	40-60%		APPROVED	
OPERATING TEMP	-22°F - 290°F		THIRD ANGLE PROJECTION	
SET SCREW SIZE	1/2-20UNF-3/4	DWG. NO.	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS			
SET SCREW AXIAL RETENTION	900 LBS			

6	NPS-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-211	BEARING STEEL	N/A	1
1	SR2FC-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
25				
25				
	DATE	BY	REVISION DESCRIPTION	REV
-	ITEM DESCRIPTION:			SCALE
	SR2-FC-211 R3XP			1:10
				REV
				-