

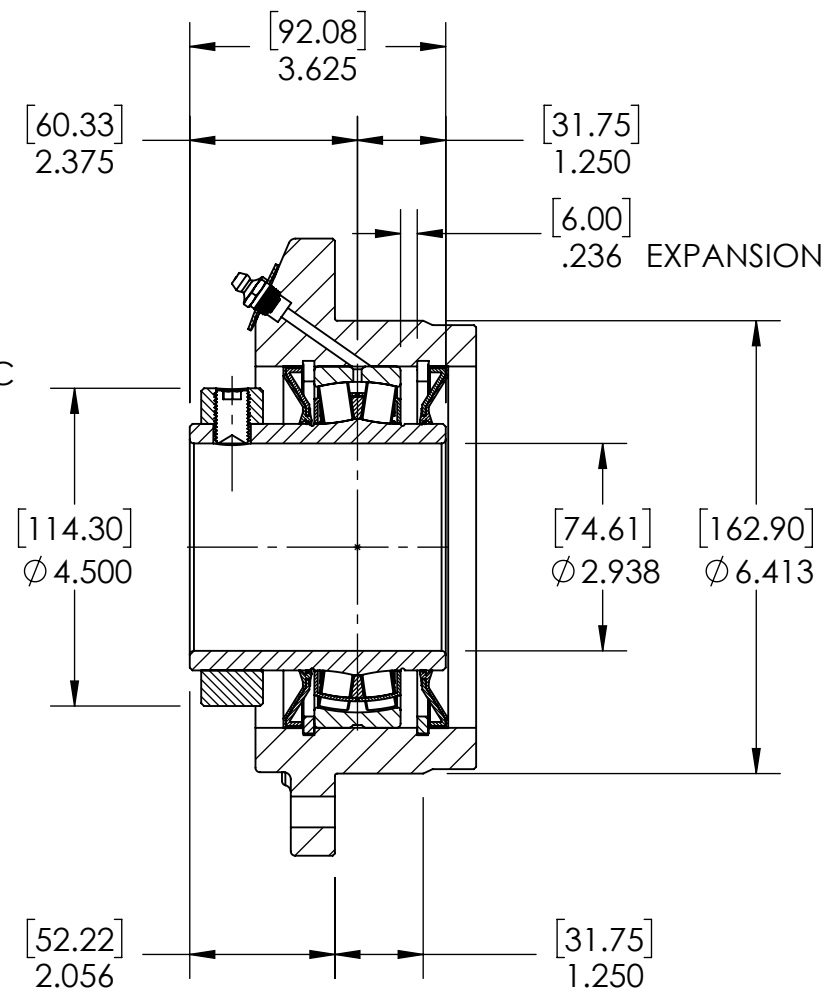
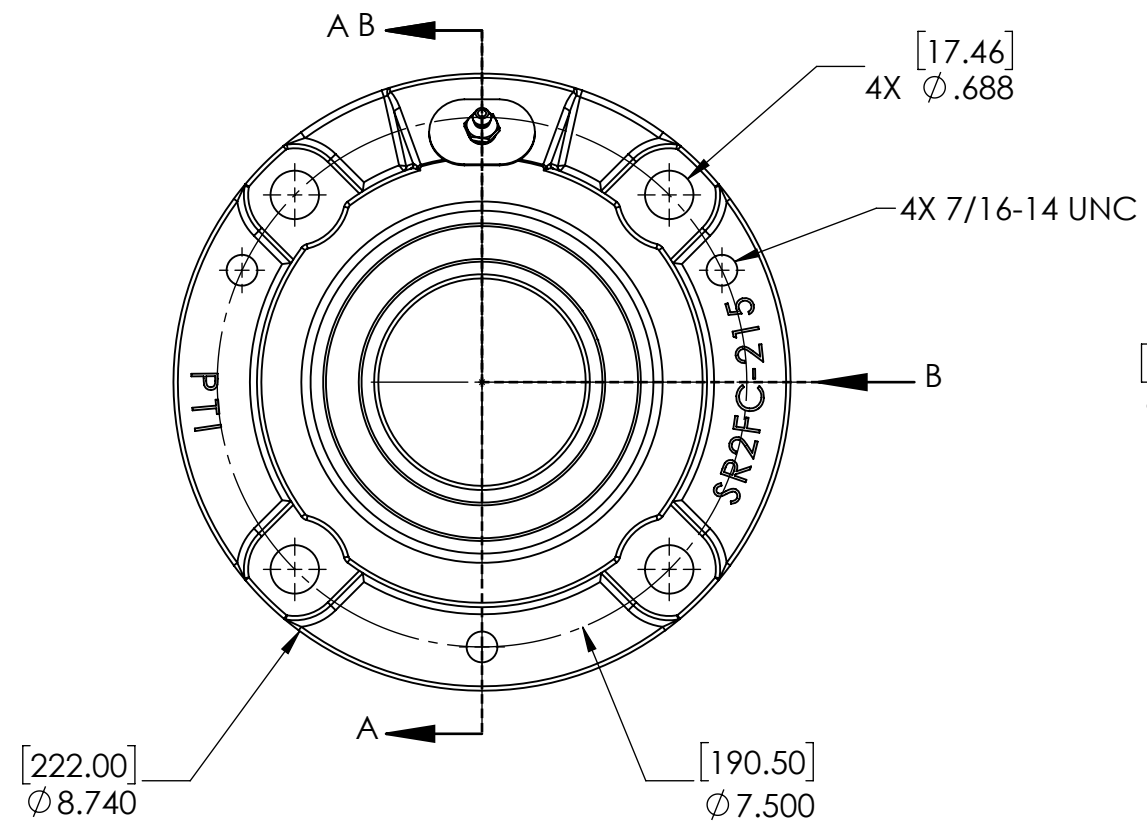


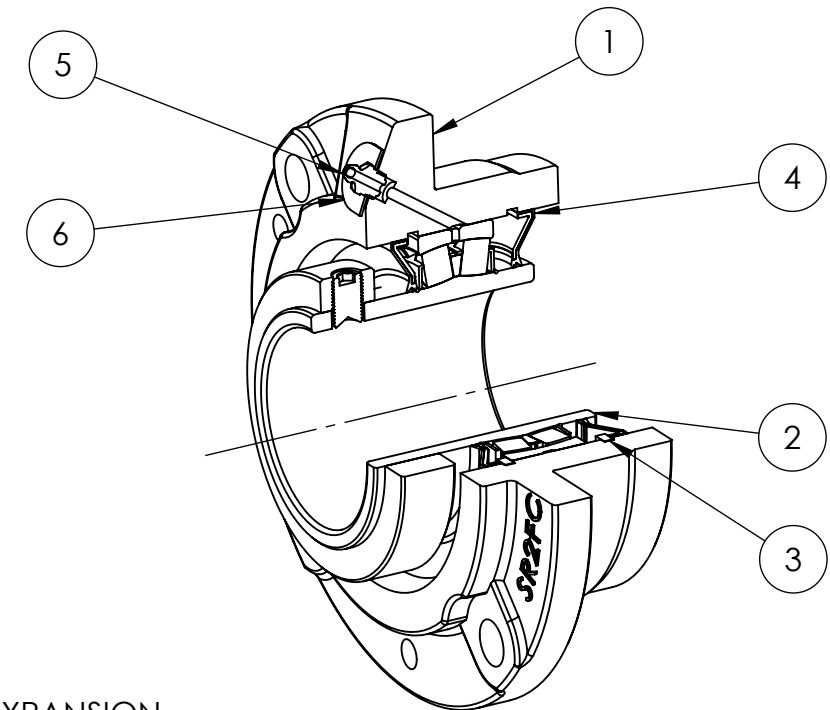

SECTION VIEW A-A

SPECIFICATIONS		
UNITS		IN [mm]
LOAD RATINGS	C Co	41590 LBS 52830 LBS
SPEED RATING		1500 RPM
GREASE TYPE		NLGI #2
GREASE FILL		40-60%
OPERATING TEMP		-22°F - 290°F
SET SCREW SIZE		1/2-20UNF-3A
SET SCREW TORQUE		620 IN-LBS
SET SCREW AXIAL RETENTION		900 LBS

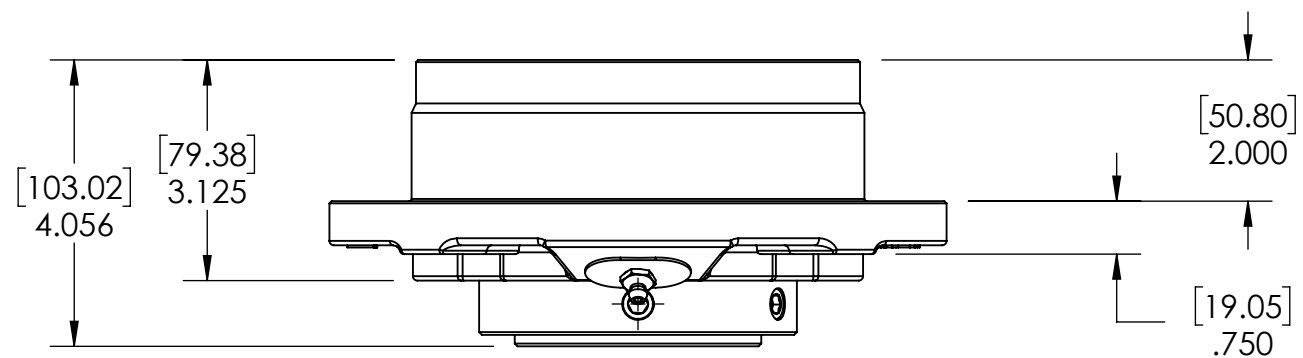

WEIGHT	21.42 LBS	
MATERIAL	SEE BOM	
COATING	SEE BOM	
DRAWN	SEC	03/14/2025
CHECKED	FP	05/05/2025
APPROVED		
THIRD ANGLE PROJECTION		
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMC. ANY REPRODUCTION OF THIS OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMC IS PROHIBITED.		

6	NPS-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-215	BEARING STEEL	N/A	1
1	SR2FC-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

05			
05			
DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SR2-FC-215R3XP			1:10
			REV -