


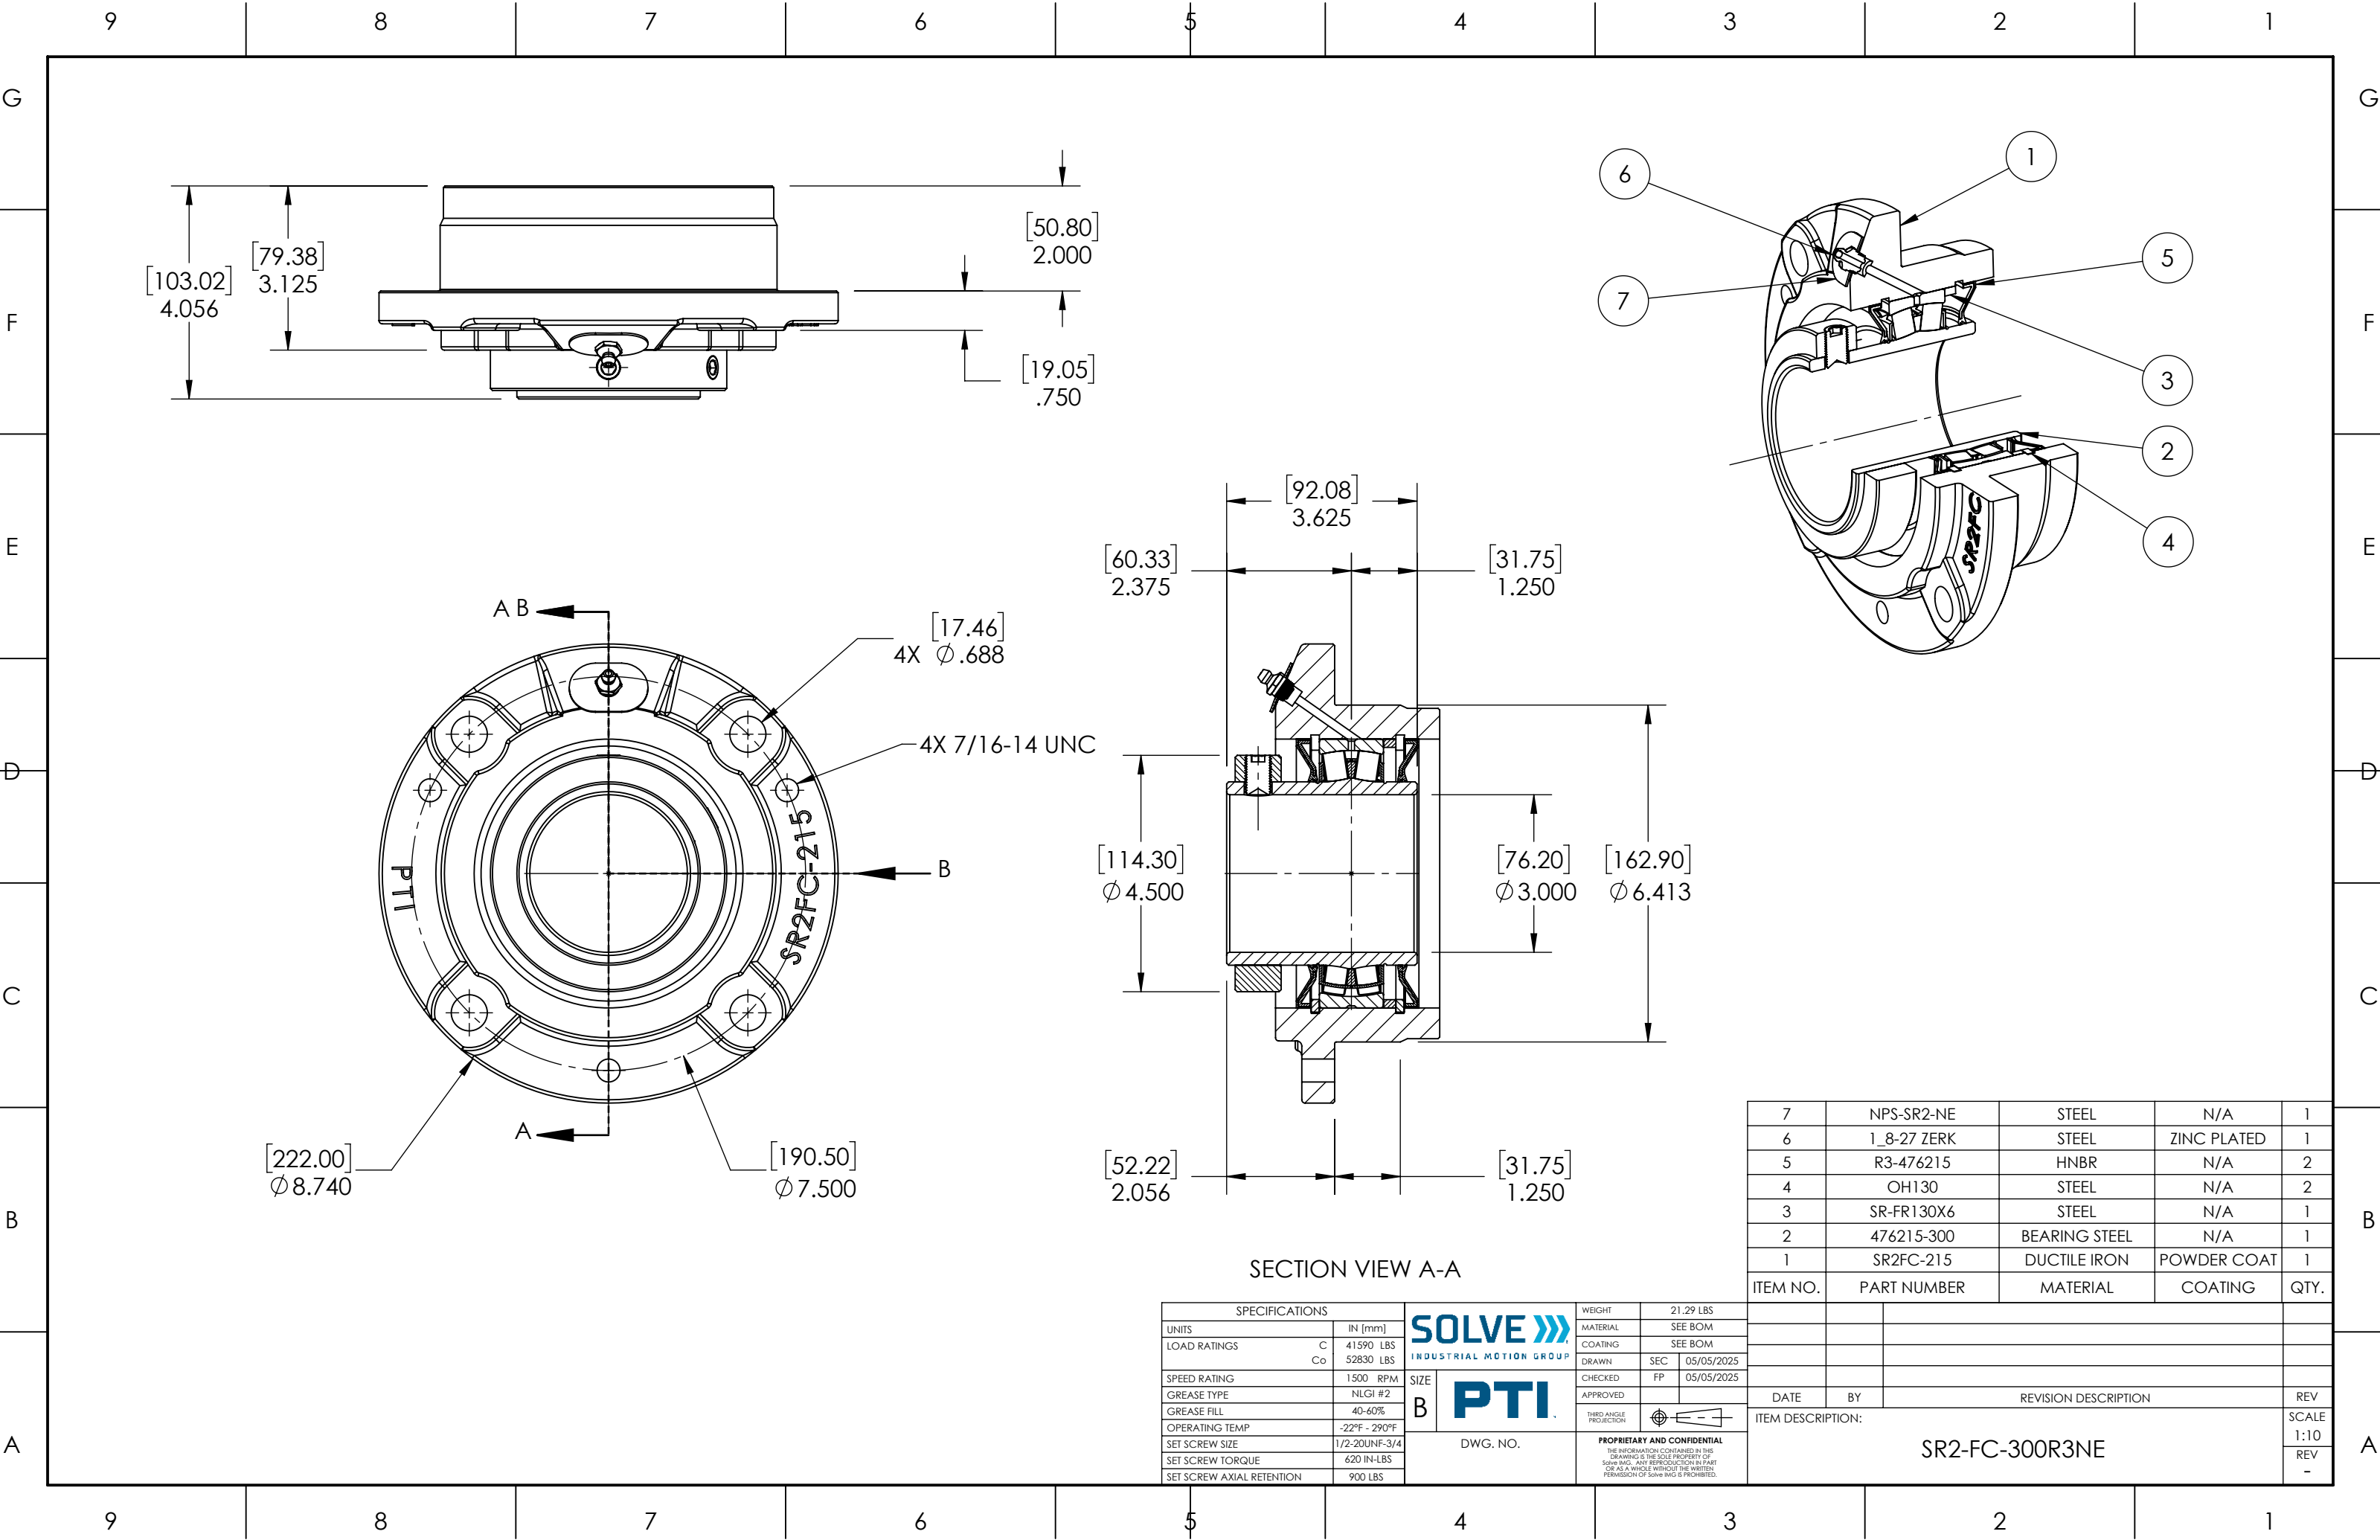

AB

4X $\frac{17.46}{\phi .688}$

4X 7/16-14 UNC

B

PTI

SR2FC-215

A

$\frac{222.00}{\phi 8.740}$

$\frac{190.50}{\phi 7.500}$

$\frac{92.08}{3.625}$

$\frac{60.33}{2.375}$

$\frac{31.75}{1.250}$


$\frac{114.30}{\phi 4.500}$

$\frac{76.20}{\phi 3.000}$

$\frac{162.90}{\phi 6.413}$

$\frac{52.22}{2.056}$

$\frac{31.75}{1.250}$

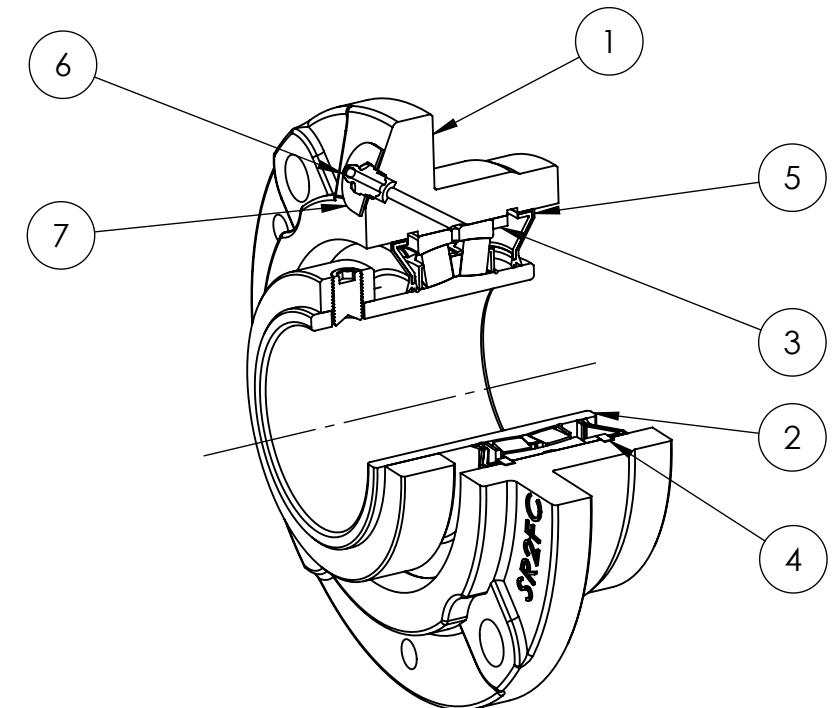

SECTION VIEW A-A

SPECIFICATIONS			SOLVE 		WEIGHT		21.29 LBS										
UNITS		IN [mm]		SIZE B 		MATERIAL		SEE BOM									
LOAD RATINGS		C 41590 LBS Co 52830 LBS				COATING		SEE BOM									
SPEED RATING		1500 RPM		DWG. NO.		DRAWN		SEC 05/05/2025									
GREASE TYPE		NLGI #2				CHECKED		FP 05/05/2025									
GREASE FILL		40-60%				APPROVED				DATE		BY		REVISION DESCRIPTION		REV	
OPERATING TEMP		-22°F - 290°F				THIRD ANGLE PROJECTION				ITEM DESCRIPTION:						SCALE	
SET SCREW SIZE		1/2-20UNF-3/4				PROPRIETARY AND CONFIDENTIAL		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.				SR2-FC-300R3NE		1:10			
SET SCREW TORQUE		620 IN-LBS												REV			
SET SCREW AXIAL RETENTION		900 LBS														-	