
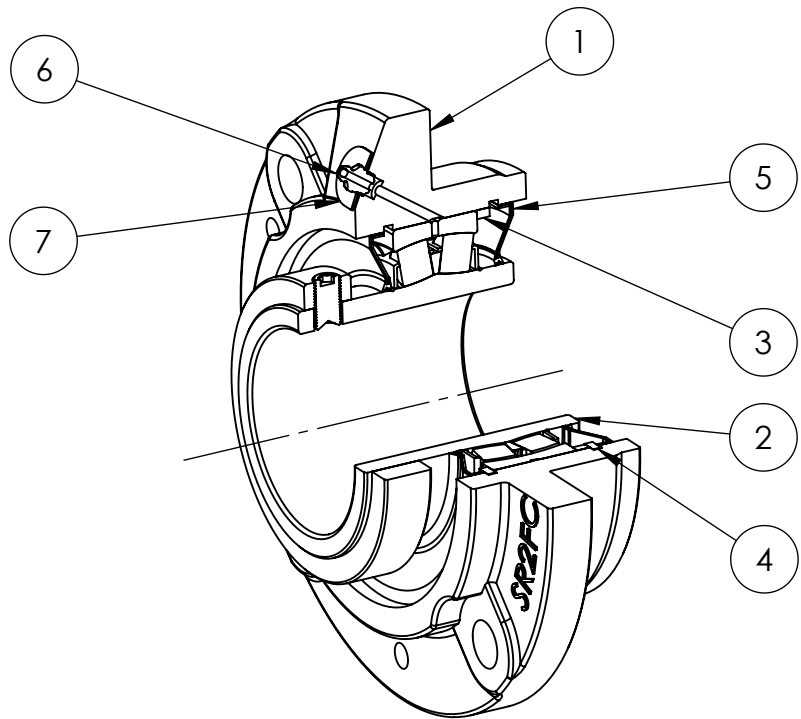
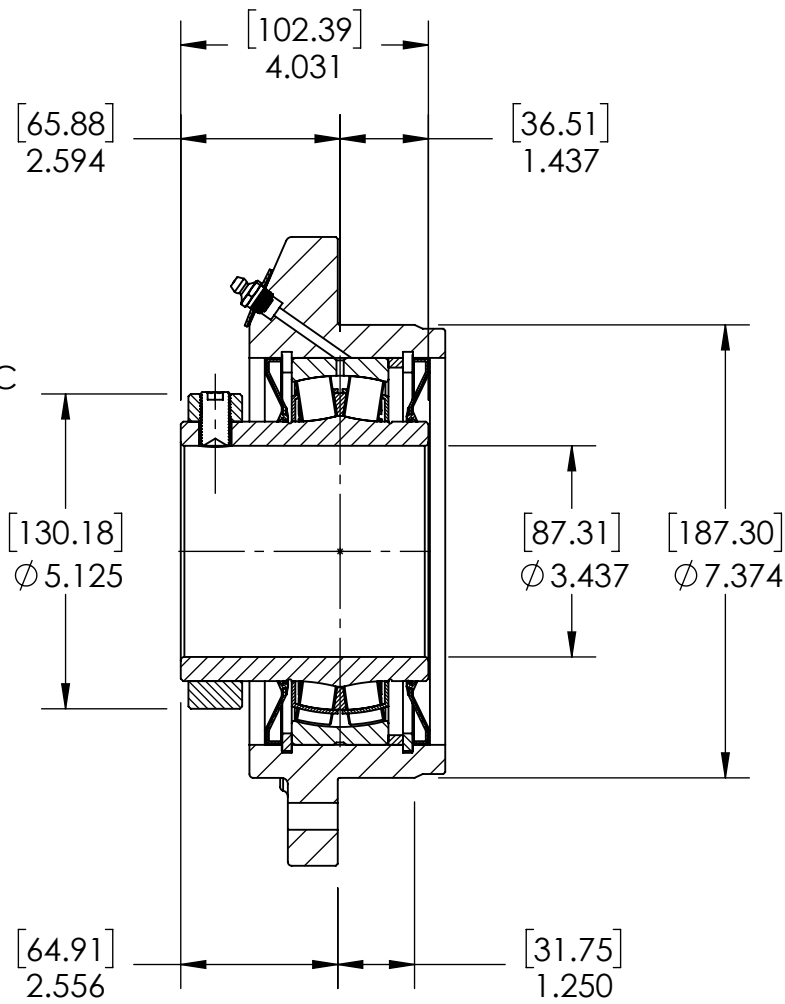
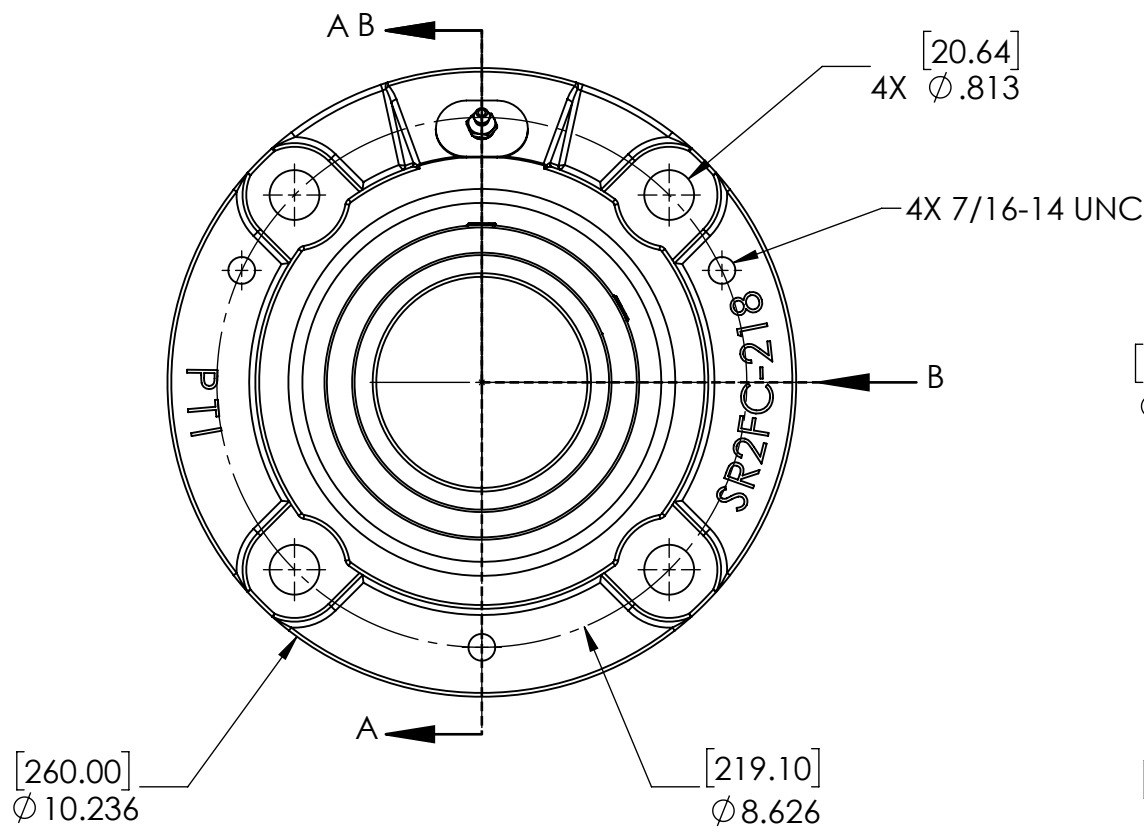
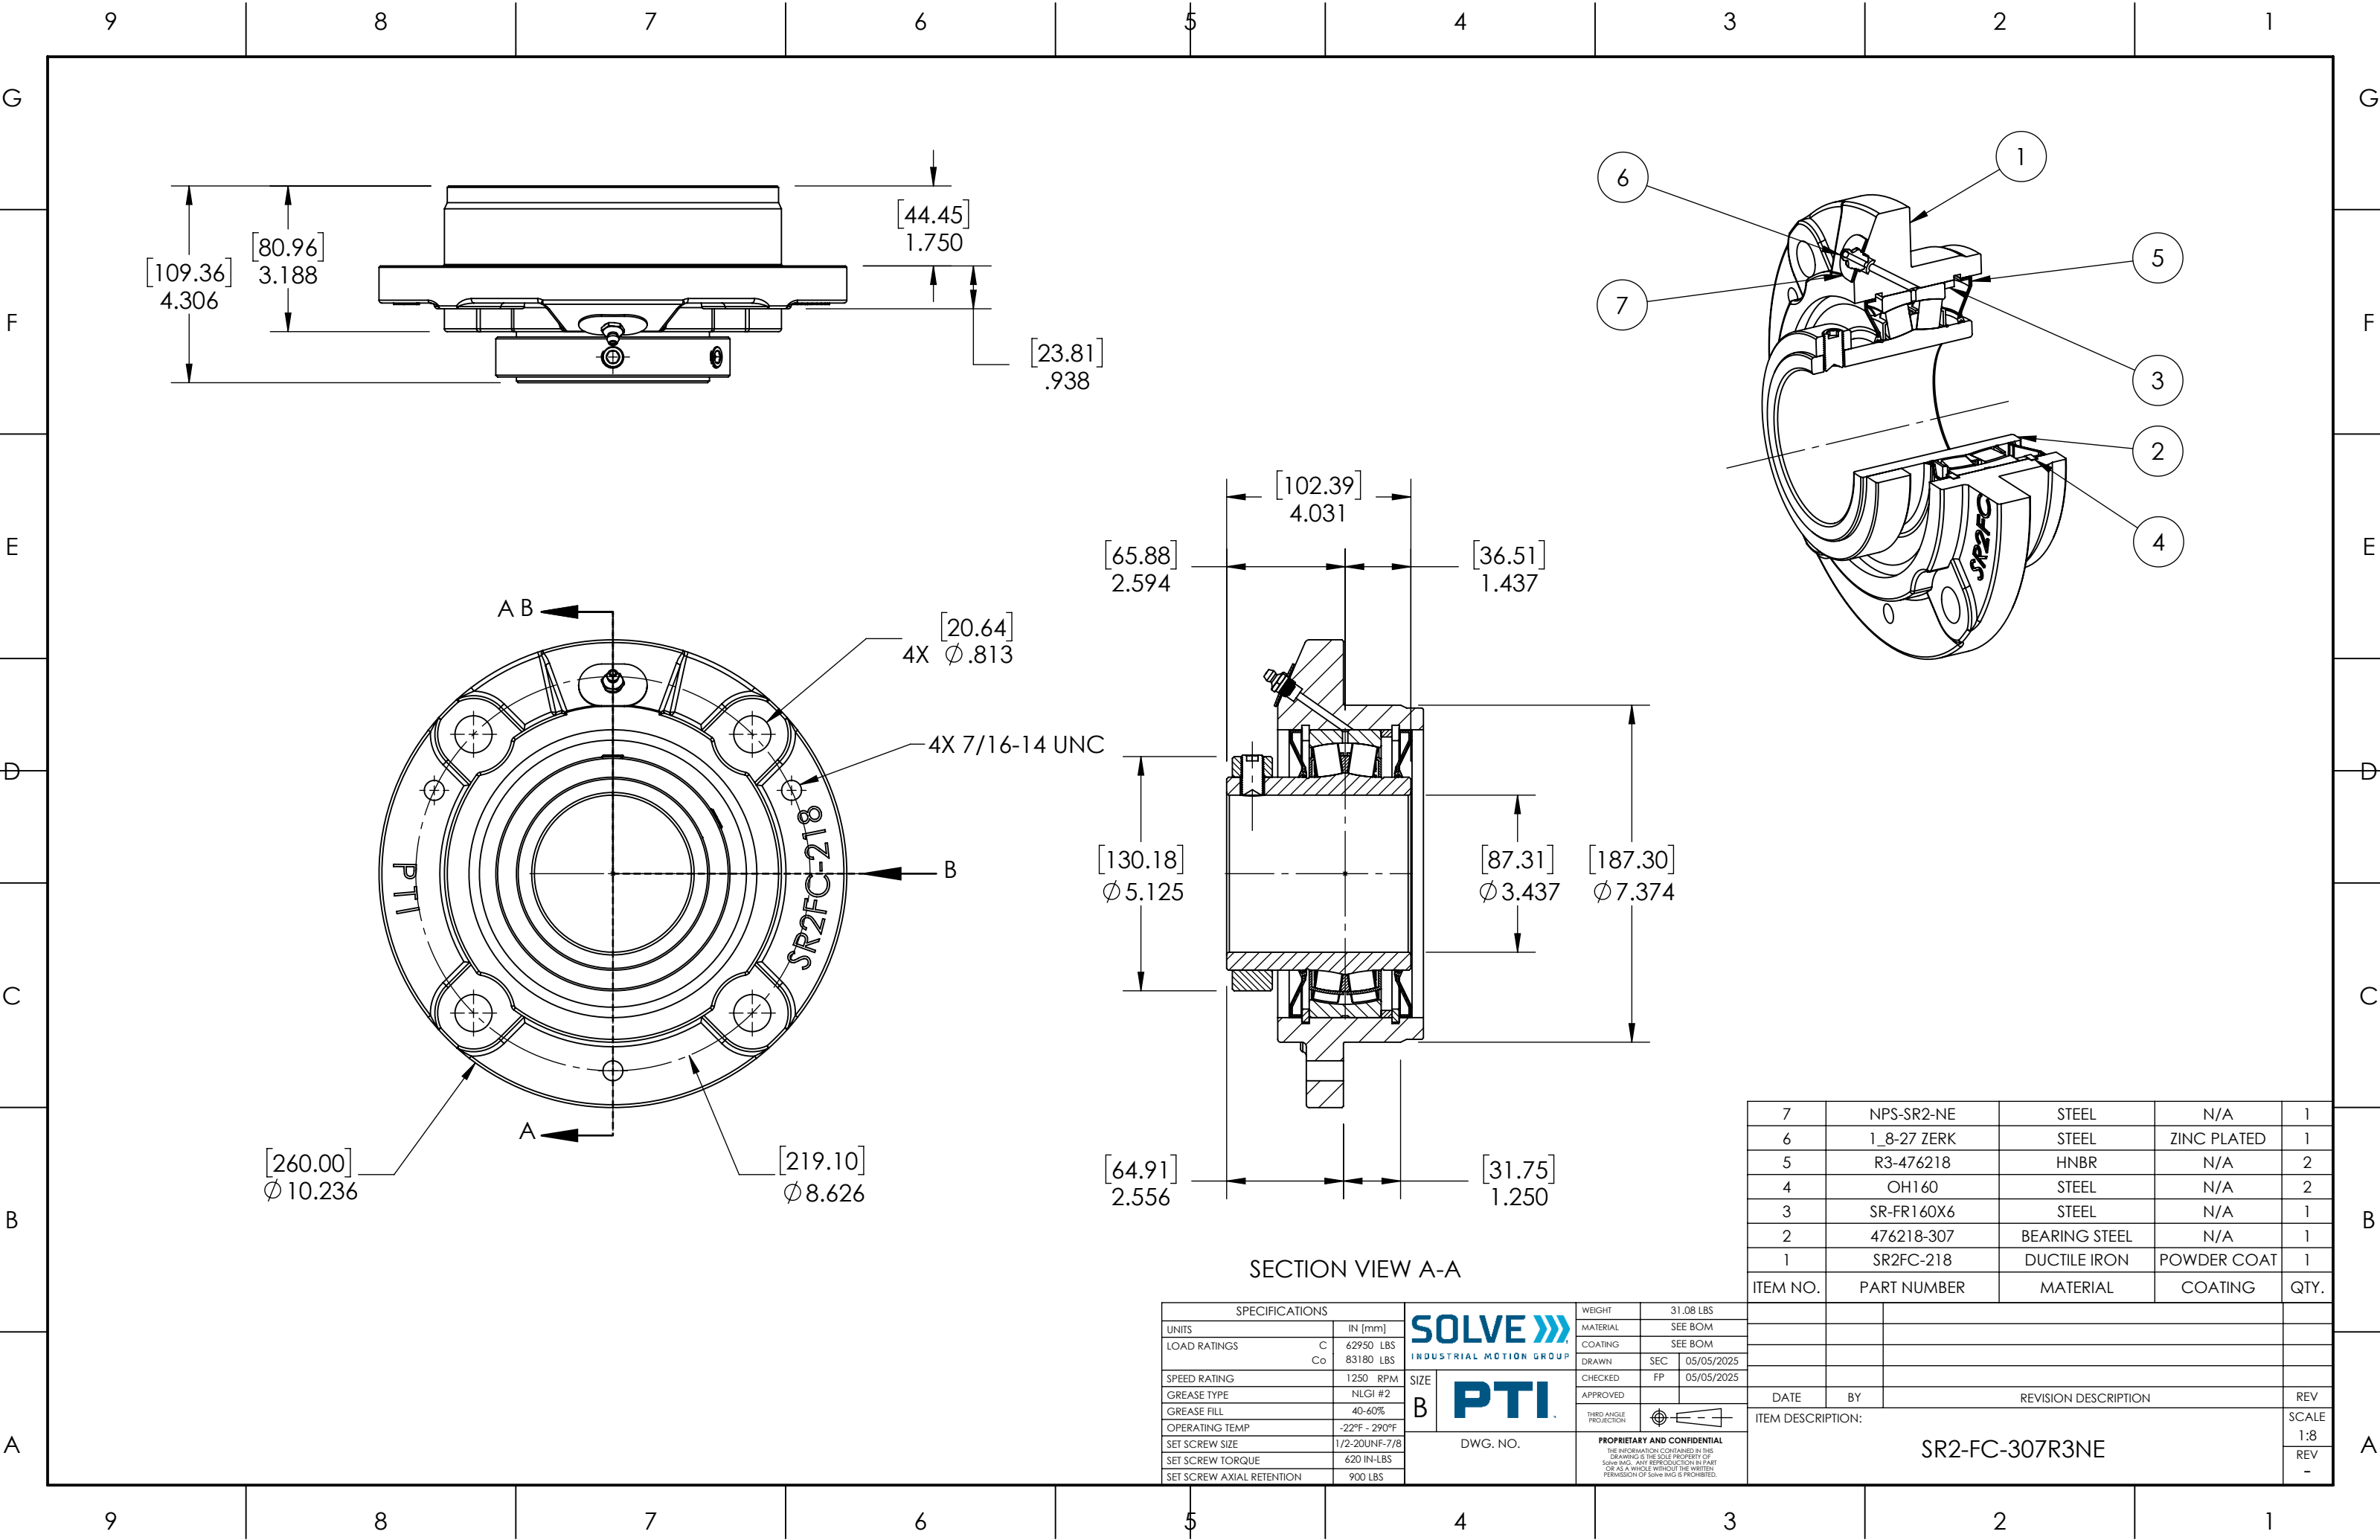




SECTION VIEW A-A

7	NPS-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476218	HNBR	N/A	2
4	OH160	STEEL	N/A	2
3	SR-FR160X6	STEEL	N/A	1
2	476218-307	BEARING STEEL	N/A	1
1	SR2FC-218	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C 62950 LBS Co 83180 LBS	COATING		SEE BOM	
SPEED RATING	1250 RPM	DRAWN		SEC	05/05/2025
GREASE TYPE	NLGI #2	CHECKED		FP	05/05/2025
GREASE FILL	40-60%	APPROVED			
OPERATING TEMP	-22°F - 290°F	THIRD ANGLE PROJECTION			
SET SCREW SIZE	1/2-20UNF-7/8	DWG. NO.		PROPRIETARY AND CONFIDENTIAL	
SET SCREW TORQUE	620 IN-LBS			THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW AXIAL RETENTION	900 LBS				

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SR2-FC-307R3NE			1:8
			REV
			-