


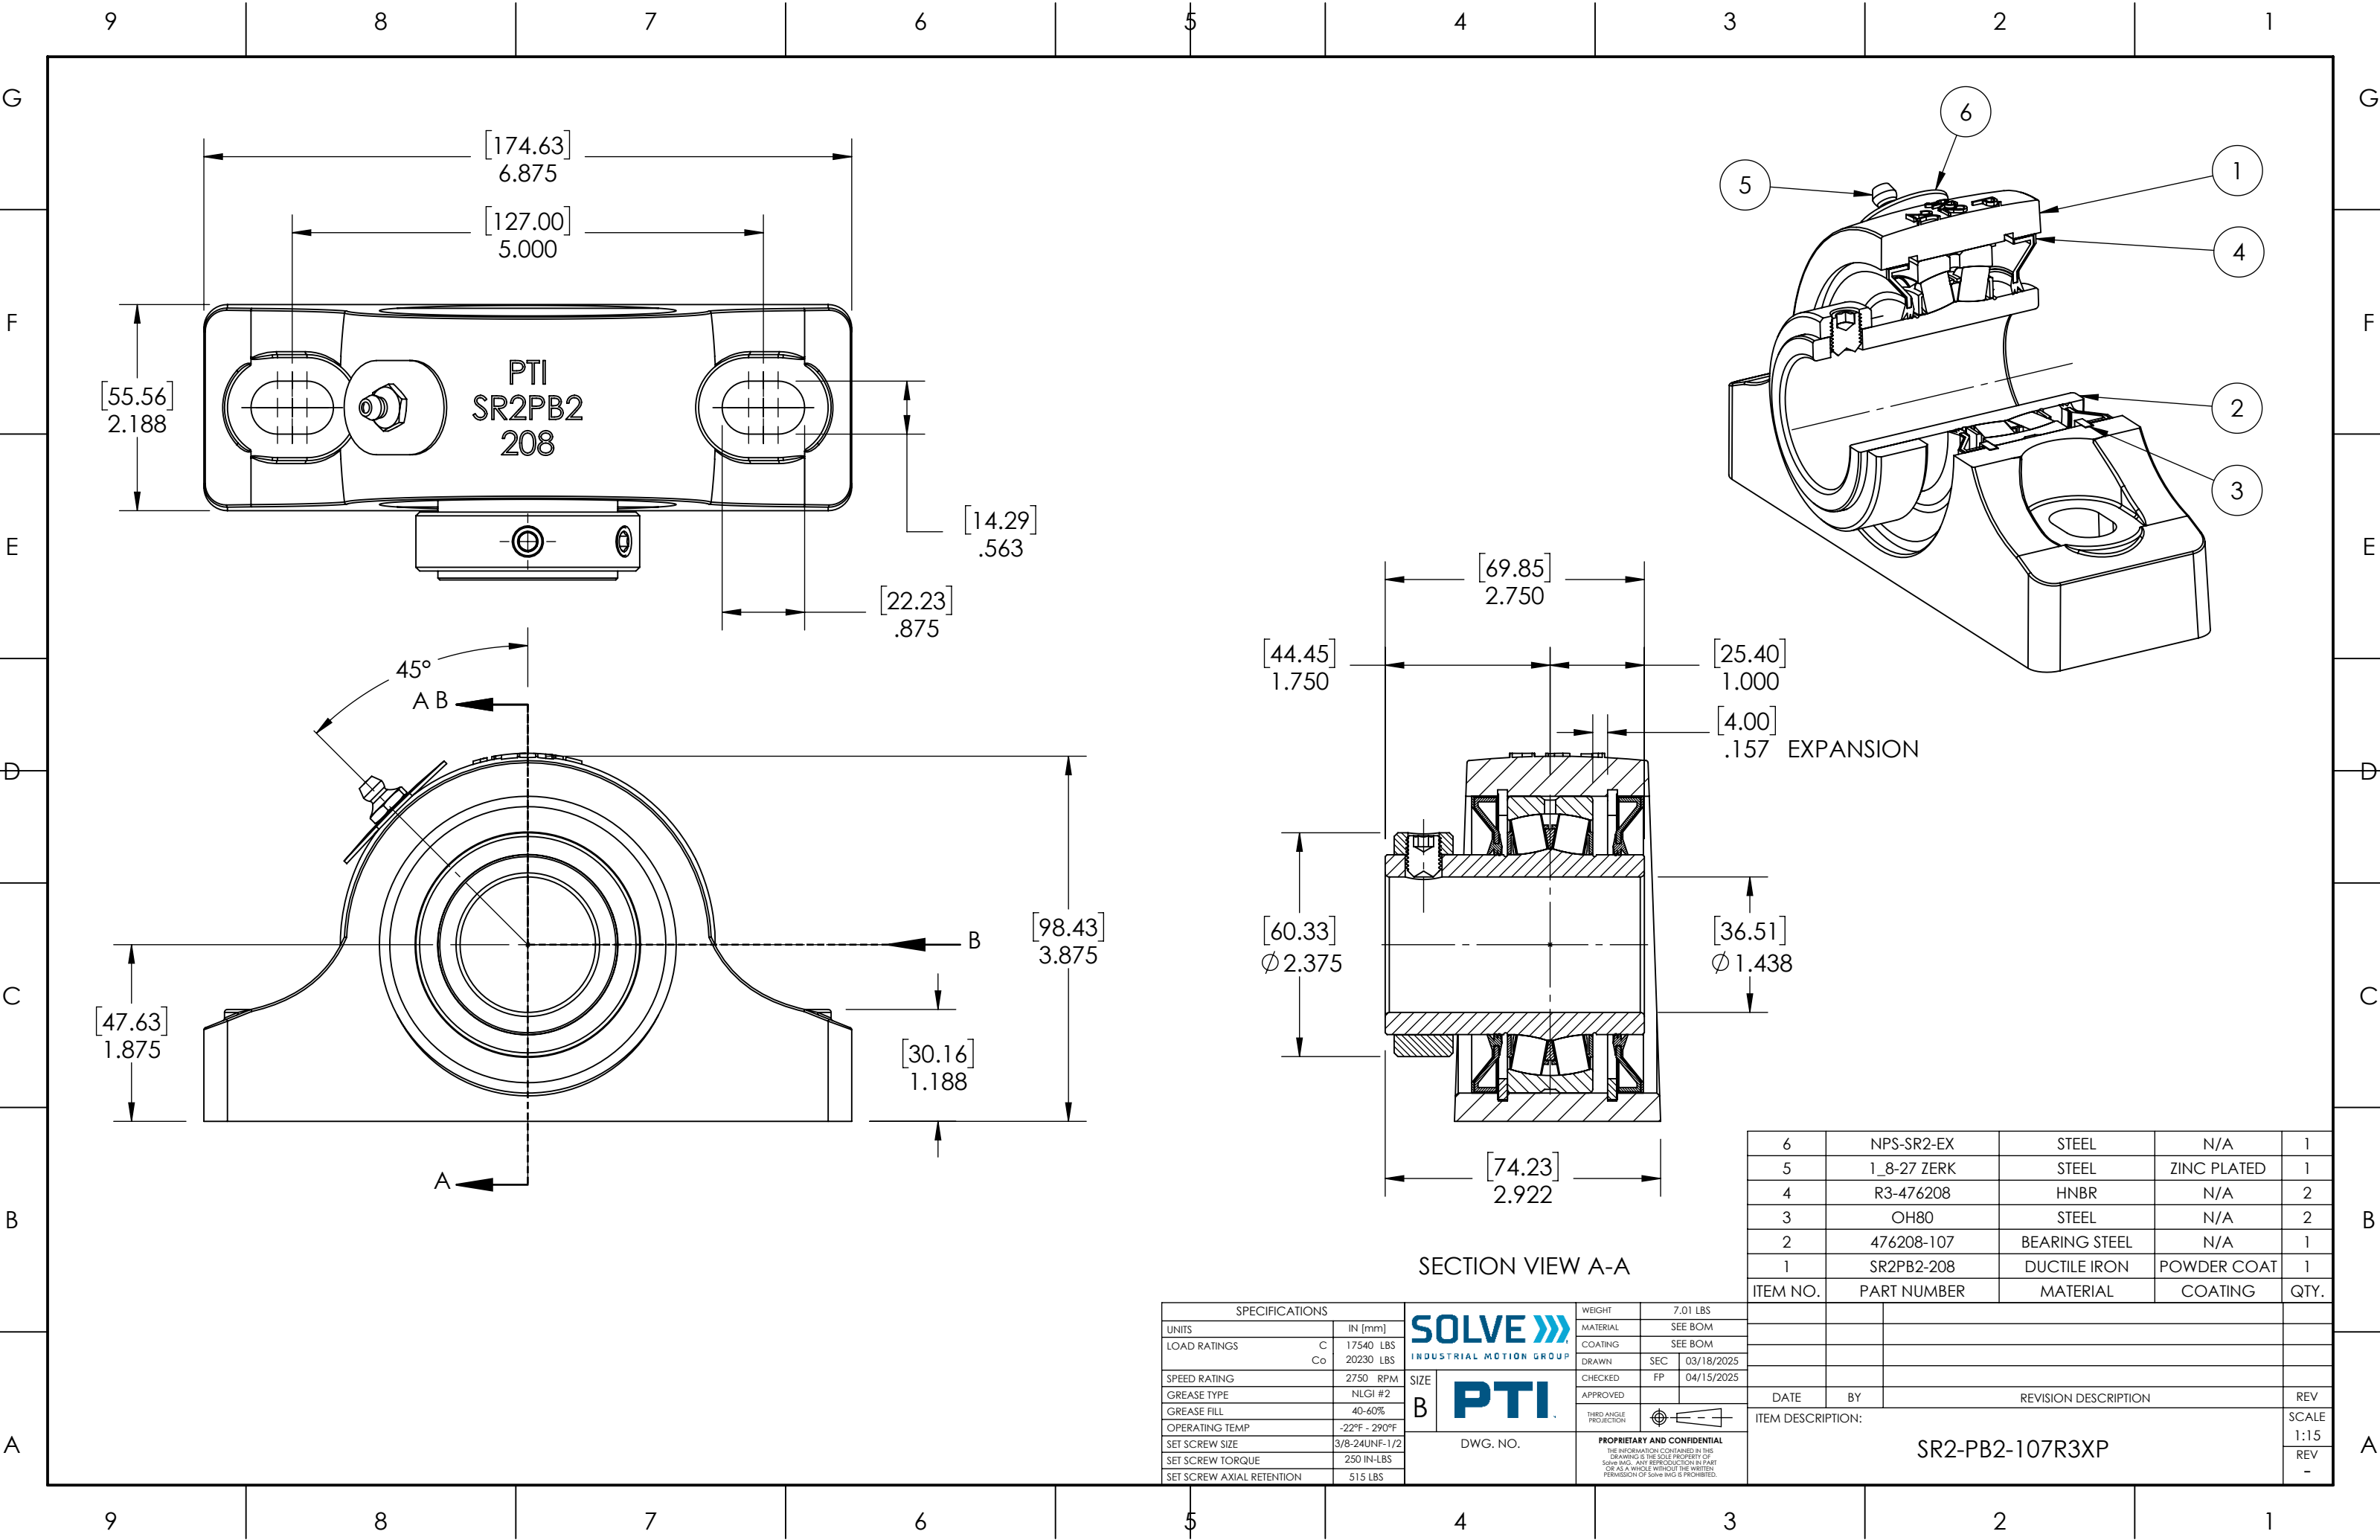

SPECIFICATIONS		SOLVE 		WEIGHT	7.01 LBS
UNITS	IN [mm]	MATERIAL		SEE BOM	
LOAD RATINGS	C Co	COATING		SEE BOM	
SPEED RATING	2750 RPM	DRAWN		SEC	03/18/2025
GREASE TYPE	NLGI #2	CHECKED		FP	04/15/2025
GREASE FILL	40-60%	APPROVED			
OPERATING TEMP	-22°F - 290°F	THIRD ANGLE PROJECTION			
SET SCREW SIZE	3/8-24UNF-1/2	DWG. NO.		PROPRIETARY AND CONFIDENTIAL	
SET SCREW TORQUE	250 IN-LBS			THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMAGING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMAGING IS PROHIBITED.	
SET SCREW AXIAL RETENTION	515 LBS				

6	NPS-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476208	HNBR	N/A	2
3	OH80	STEEL	N/A	2
2	476208-107	BEARING STEEL	N/A	1
1	SR2PB2-208	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE BY REVISION DESCRIPTION				
ITEM DESCRIPTION: SR2-PB2-107R3XP				
REV				SCALE
-				1:15
				REV
				-