
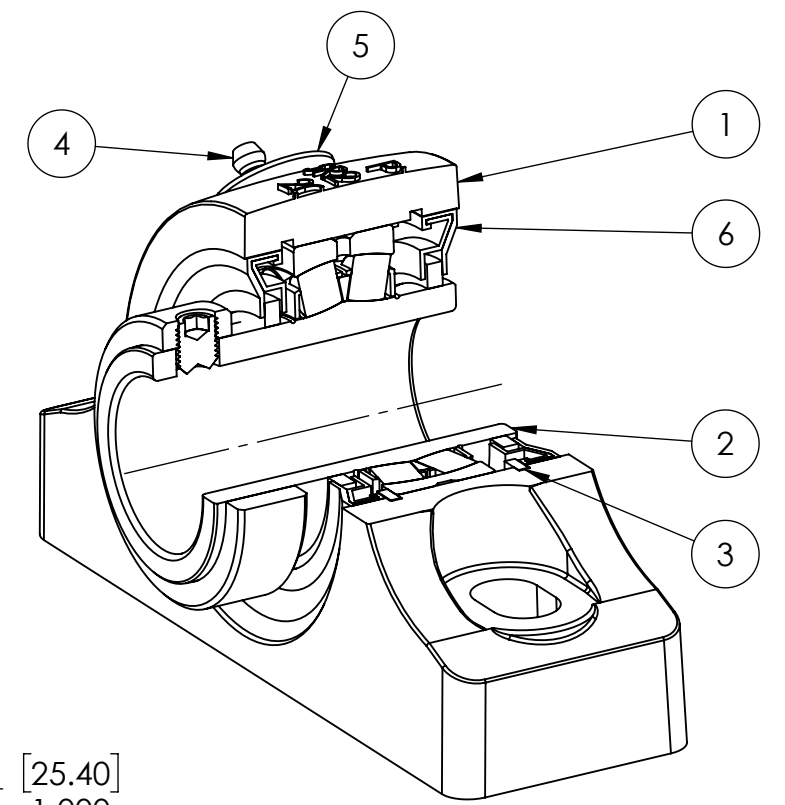
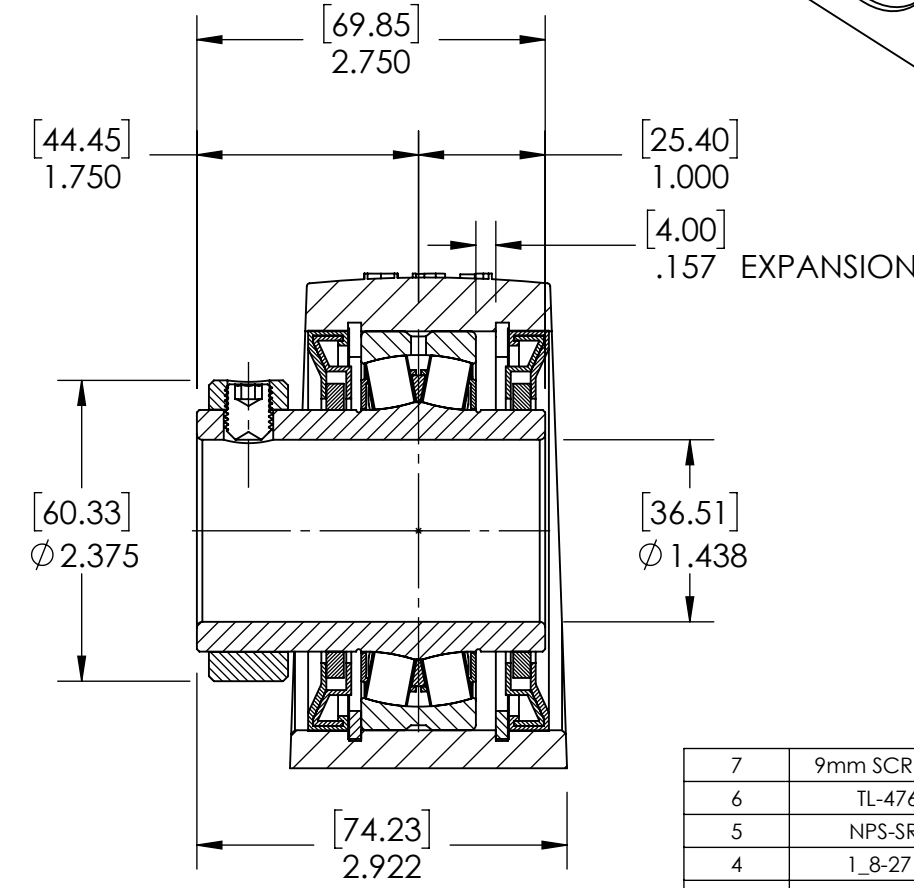
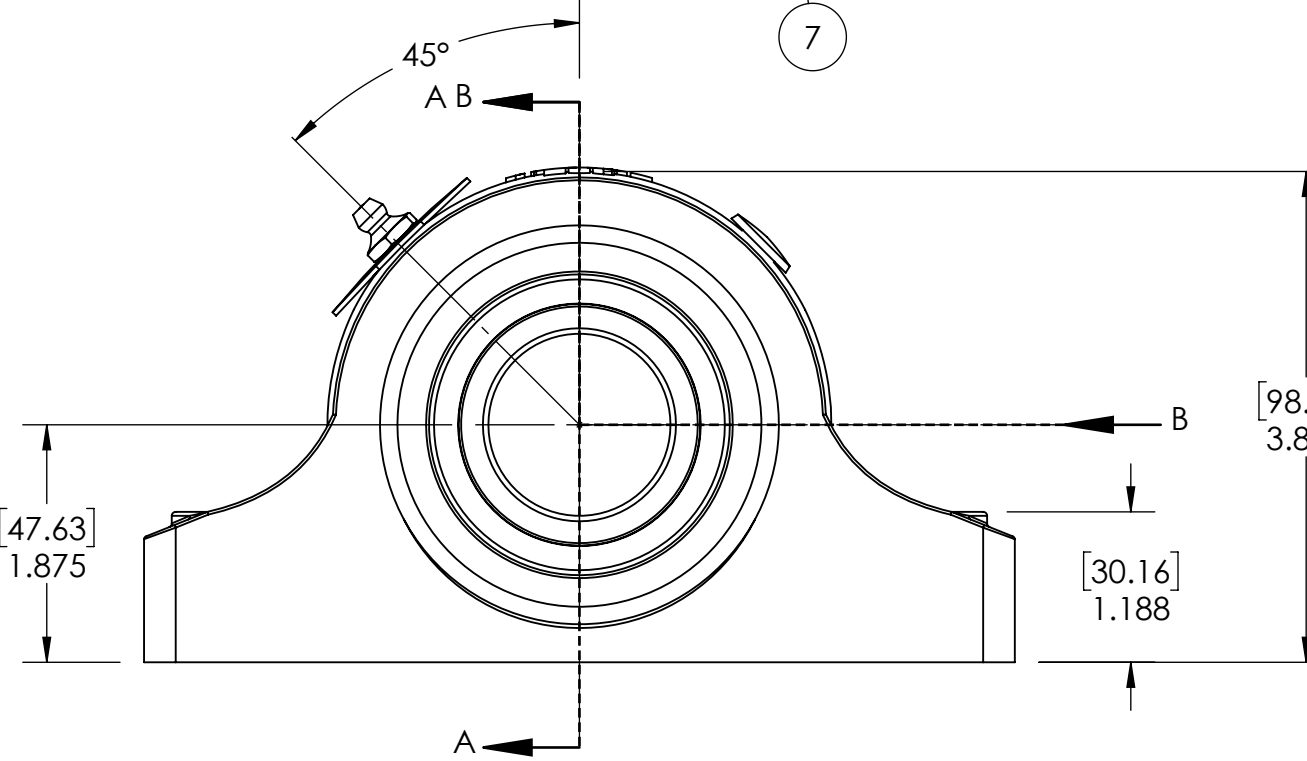
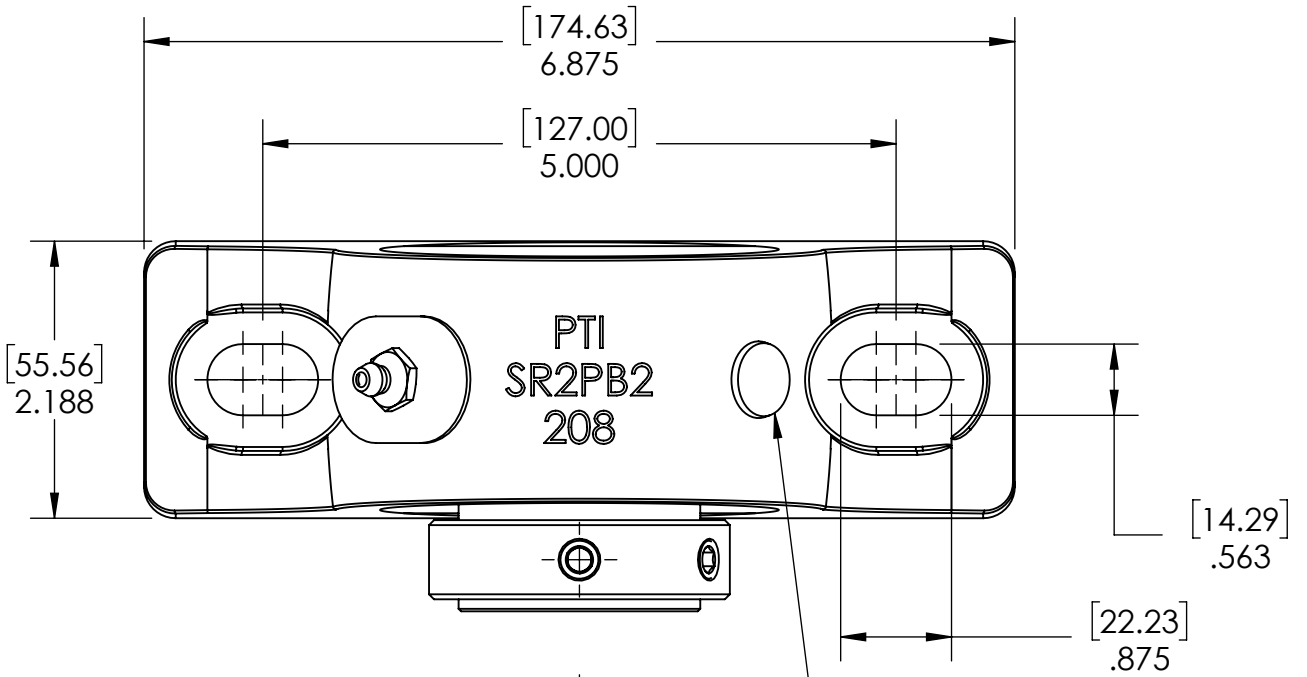


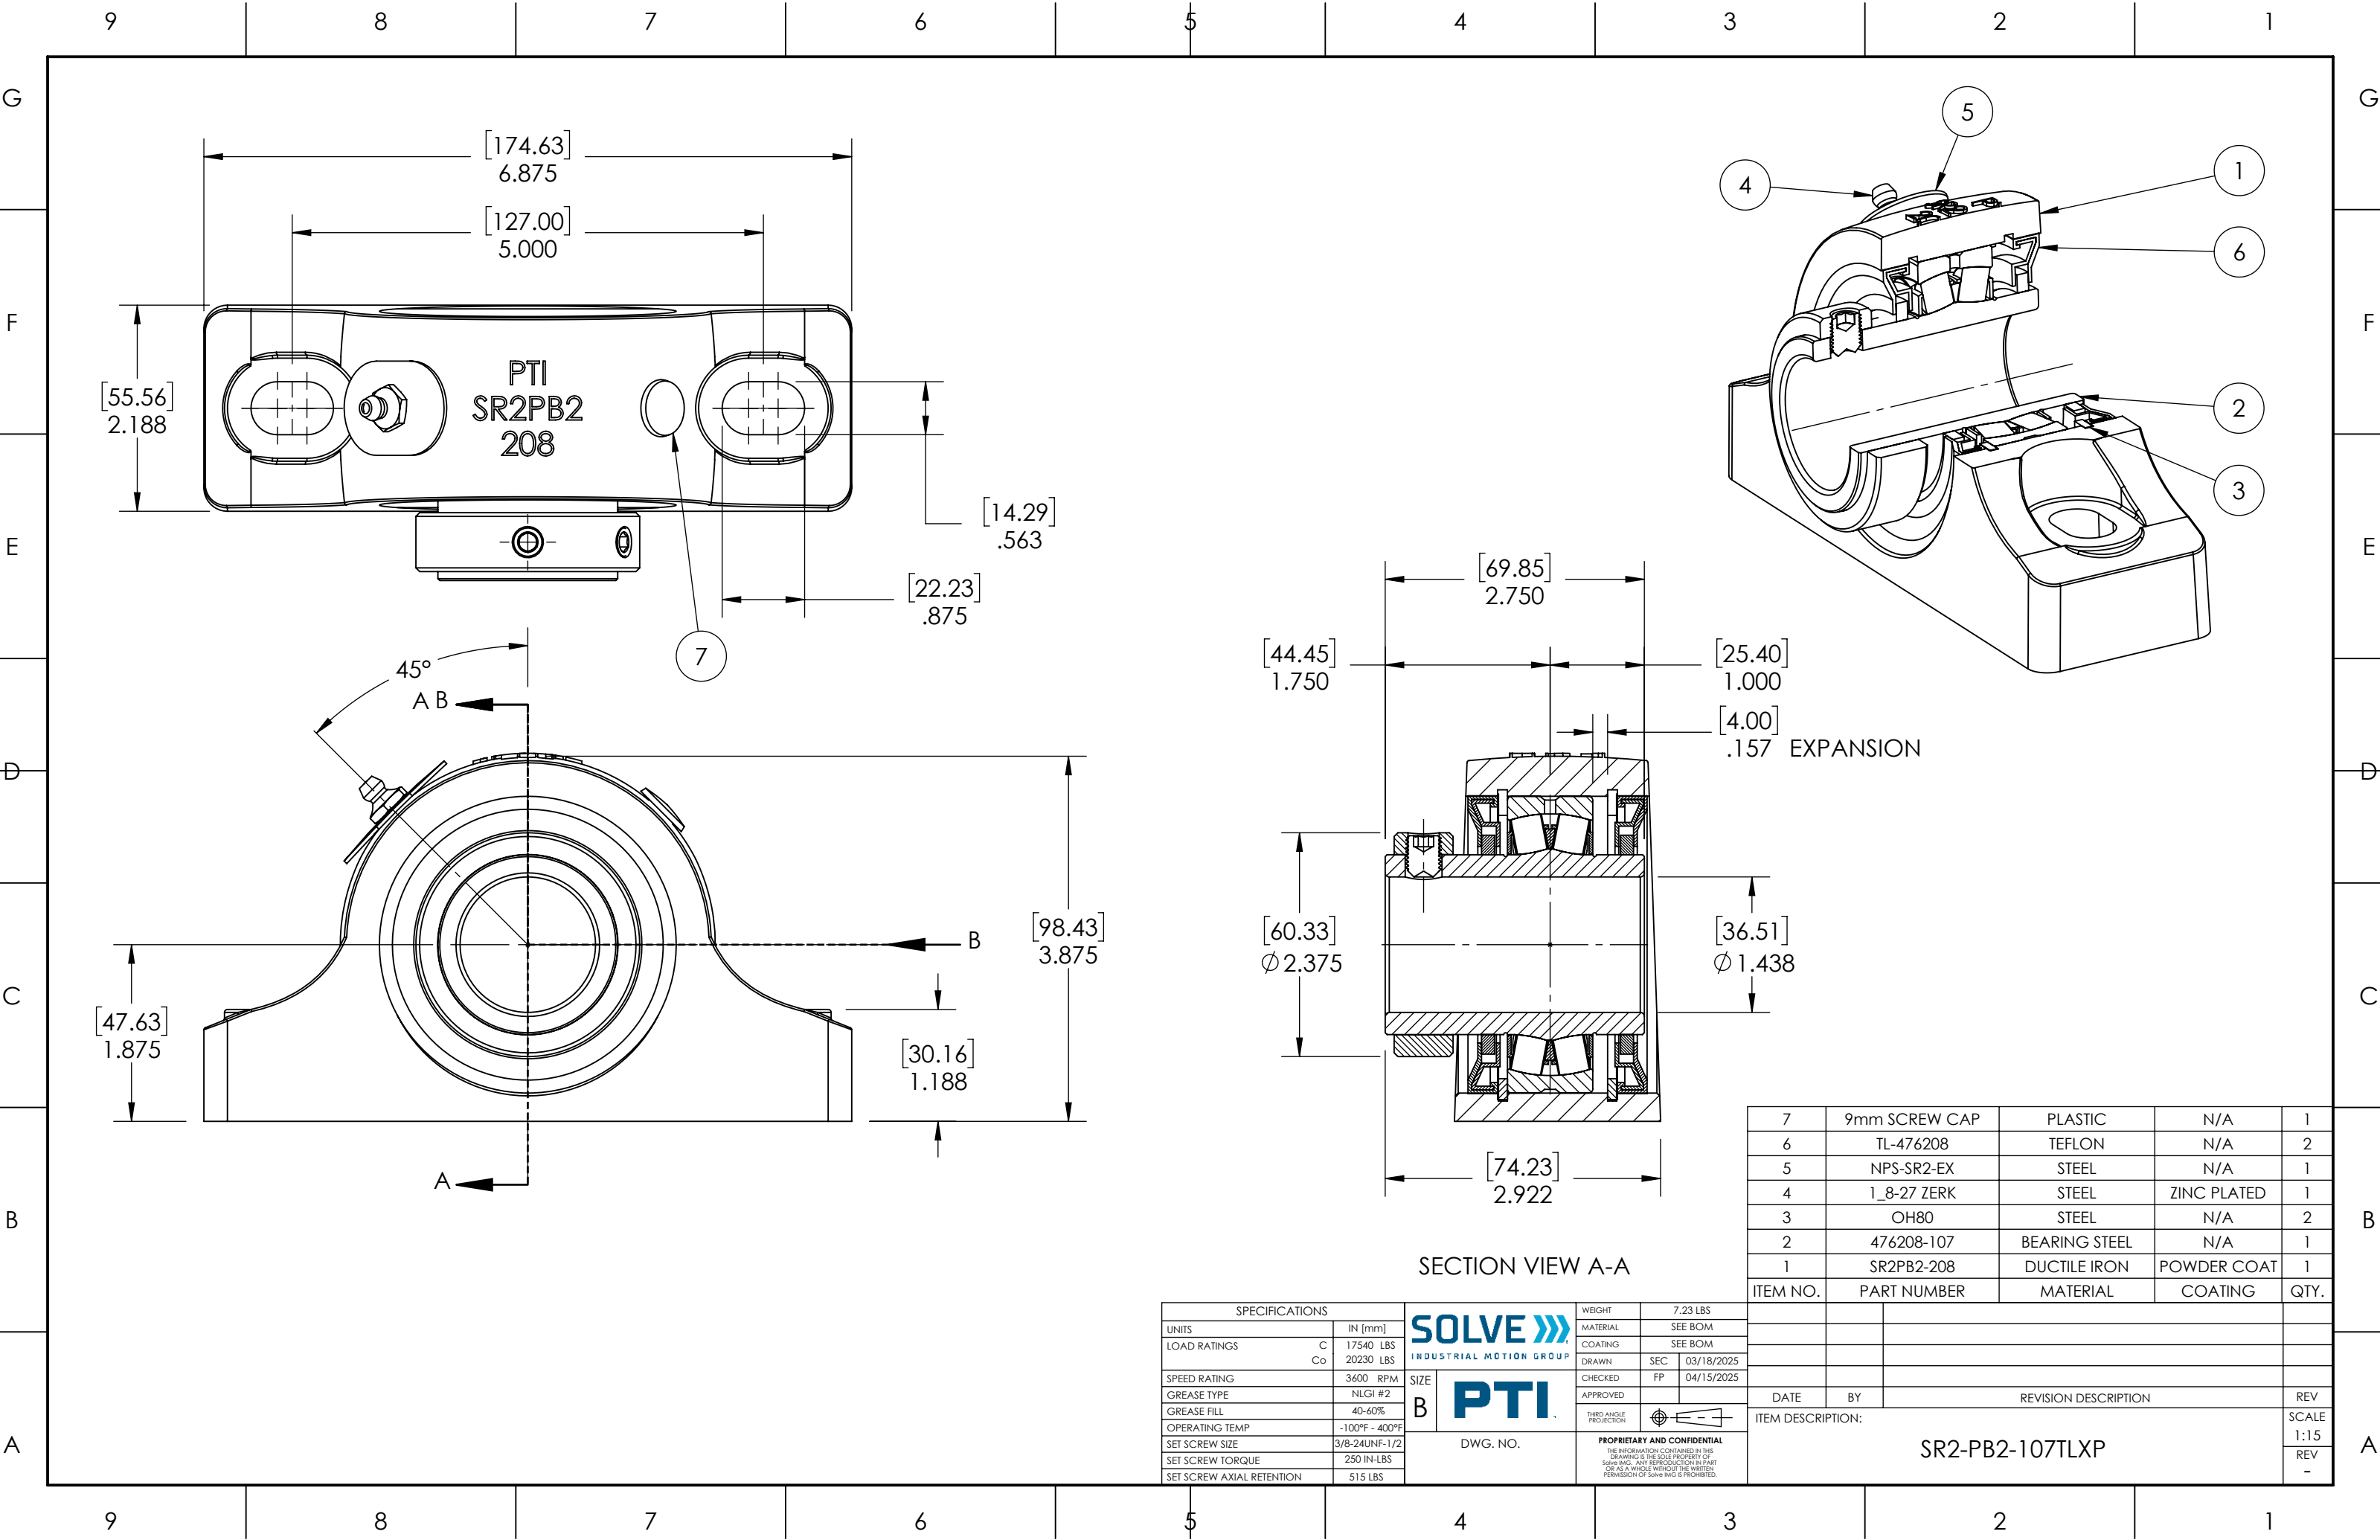

SECTION VIEW A-A

SPECIFICATIONS		WEIGHT		7.23 LBS	
UNITS	IN [mm]	MATERIAL		SEE BOM	
LOAD RATINGS	C Co	COATING		SEE BOM	
SPEED RATING	3600 RPM	DRAWN		SEC 03/18/2025	
GREASE TYPE	NLGI #2	CHECKED		FP 04/15/2025	
GREASE FILL	40-60%	APPROVED			
OPERATING TEMP	-100°F - 400°F	THIRD ANGLE PROJECTION			
SET SCREW SIZE	3/8-24UNF-1/2	DWG. NO.		SR2-PB2-107TLXP	
SET SCREW TORQUE	250 IN-LBS	PROPRIETARY AND CONFIDENTIAL		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW AXIAL RETENTION	515 LBS	DATE		BY	
		REVISION DESCRIPTION		REV	
		ITEM DESCRIPTION:		SCALE	
				1:15	
				REV	
				-	