


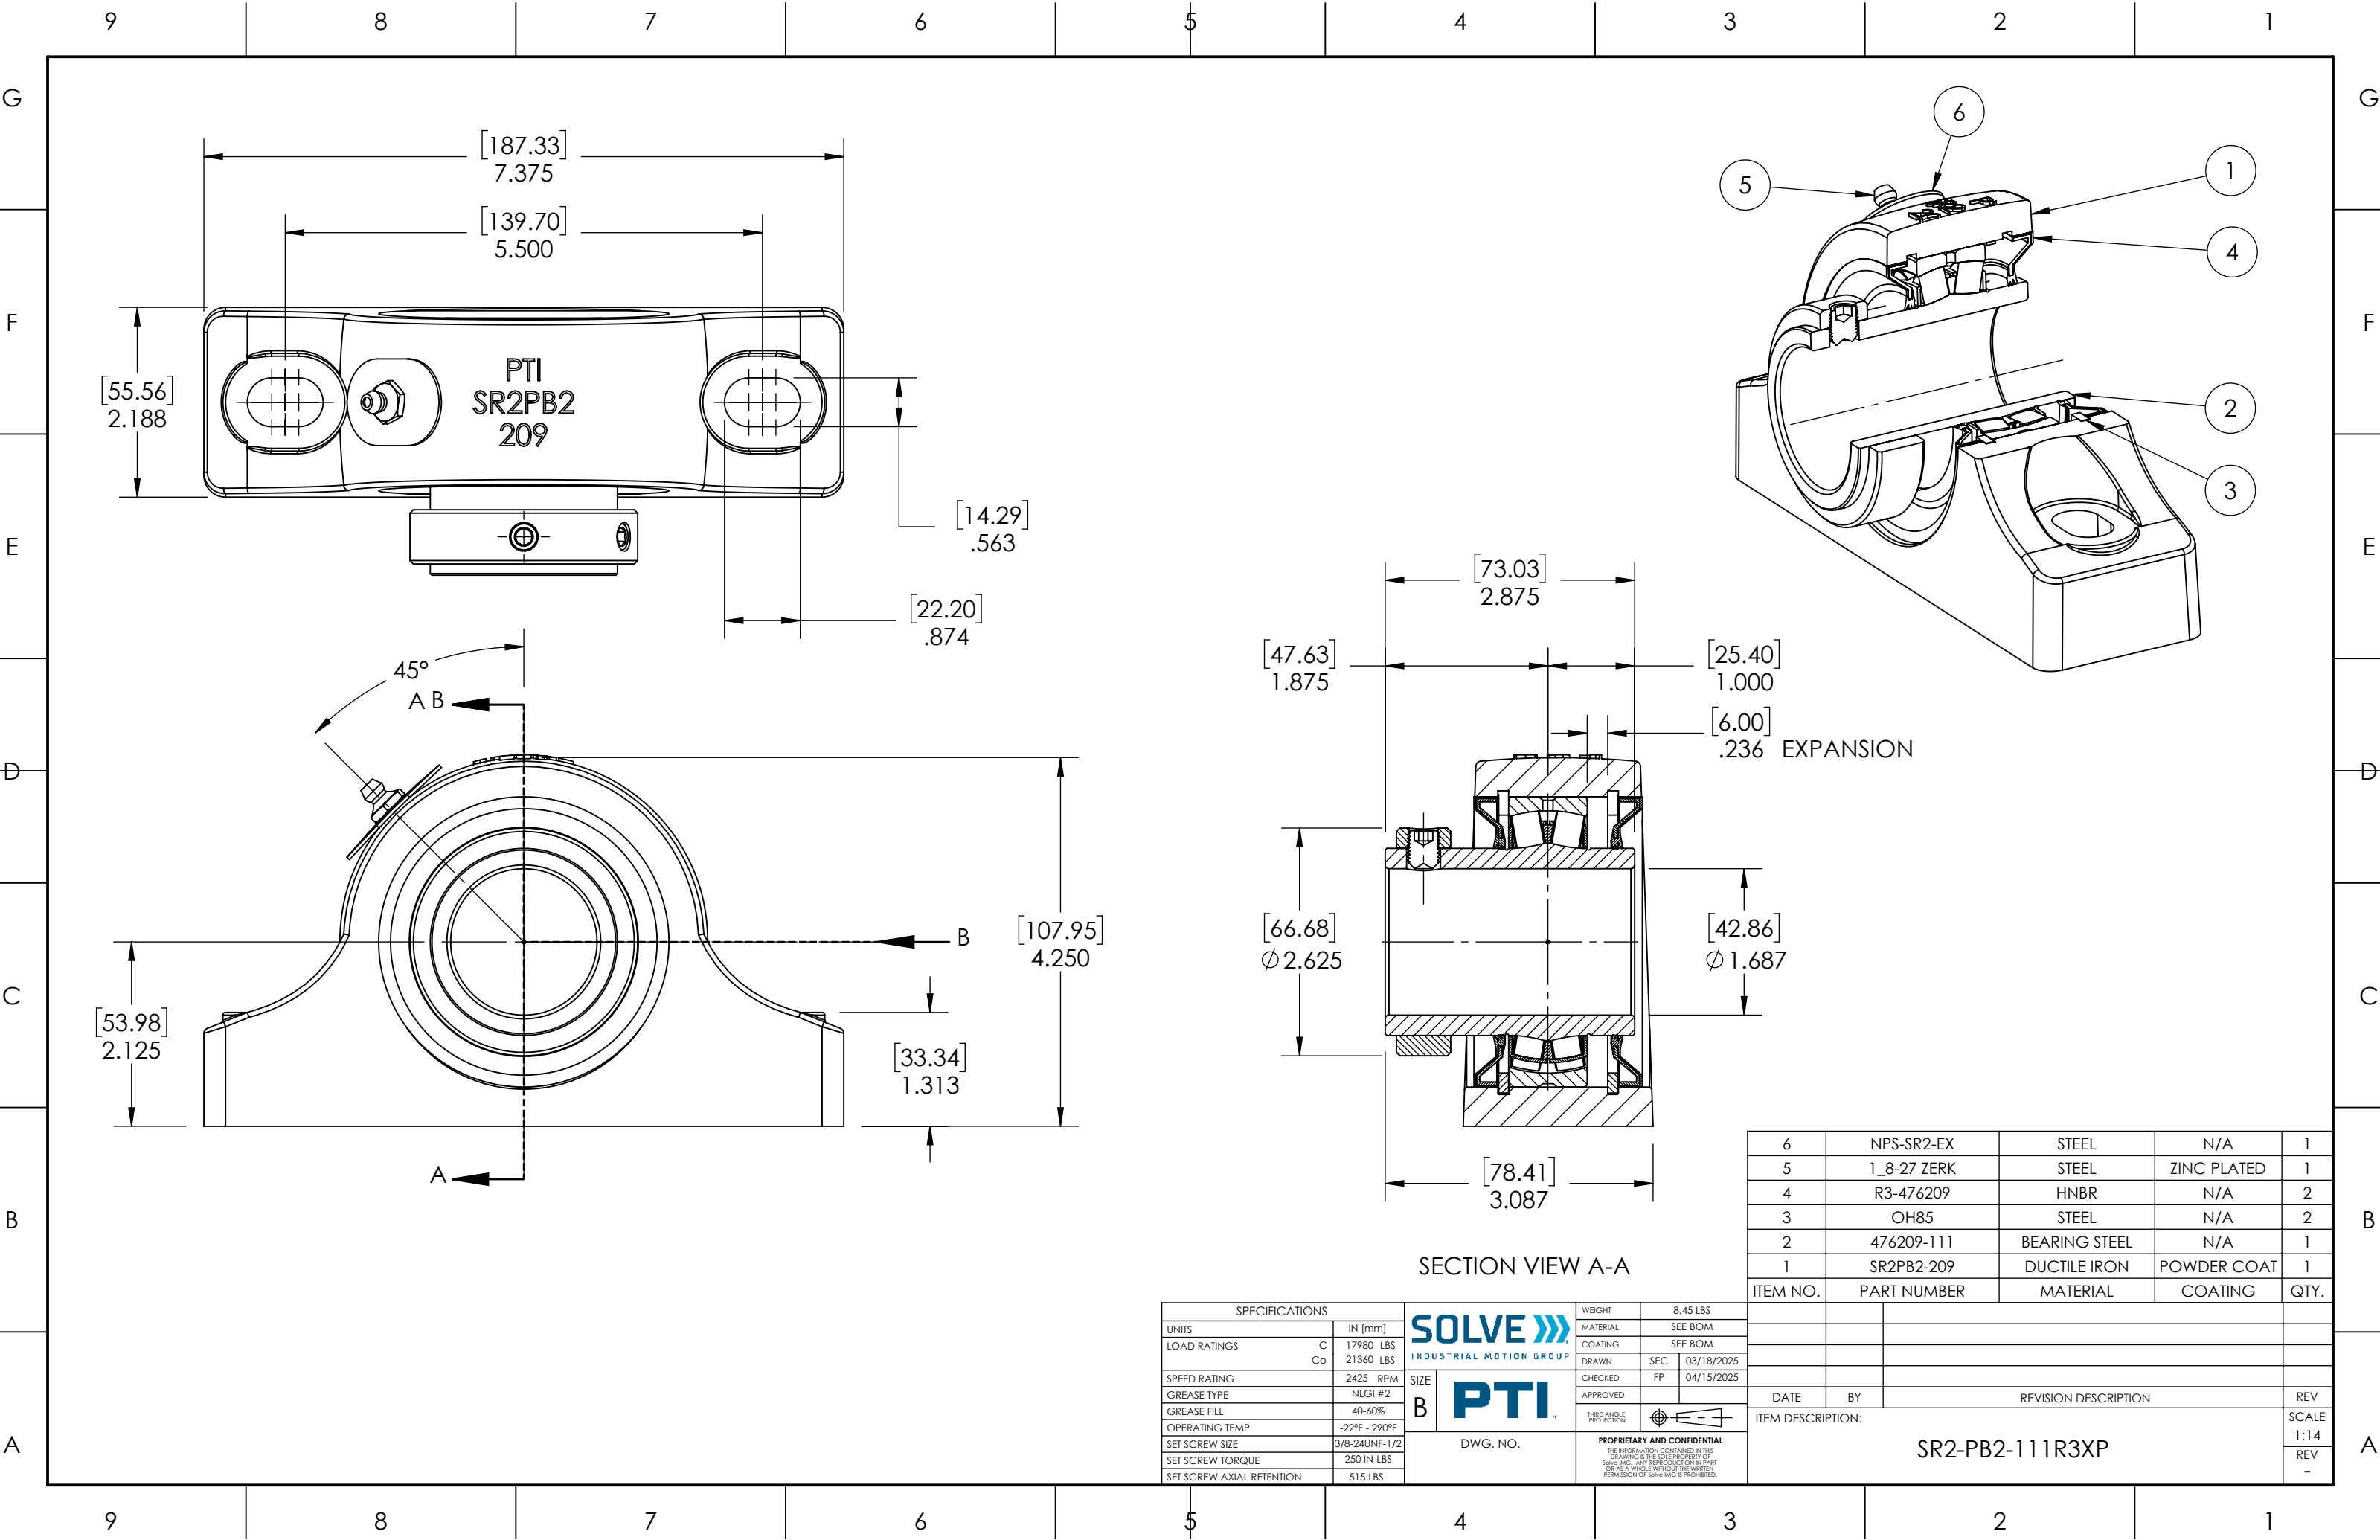

SPECIFICATIONS				SOLVE 		WEIGHT	
UNITS		IN [mm]		MATERIAL		SEE BOM	
LOAD RATINGS	C	17980 LBS		COATING		SEE BOM	
	Co	21360 LBS		DRAWN		SEC	03/18/2025
SPEED RATING		2425 RPM		CHECKED		FP	04/15/2025
GREASE TYPE		NLGI #2		APPROVED			
GREASE FILL		40-60%		THIRD ANGLE PROJECTION			
OPERATING TEMP		-22°F - 290°F		DWG. NO.		PROPRIETARY AND CONFIDENTIAL	
SET SCREW SIZE		3/8-24UNF-1/2				THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMAGING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMAGING IS PROHIBITED.	
SET SCREW TORQUE		250 IN-LBS					
SET SCREW AXIAL RETENTION		515 LBS					

6	NPS-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476209	HNBR	N/A	2
3	OH85	STEEL	N/A	2
2	476209-111	BEARING STEEL	N/A	1
1	SR2PB2-209	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE				BY
REVISION DESCRIPTION				REV
ITEM DESCRIPTION:				SCALE
SR2-PB2-111R3XP				1:14
				REV
				-