


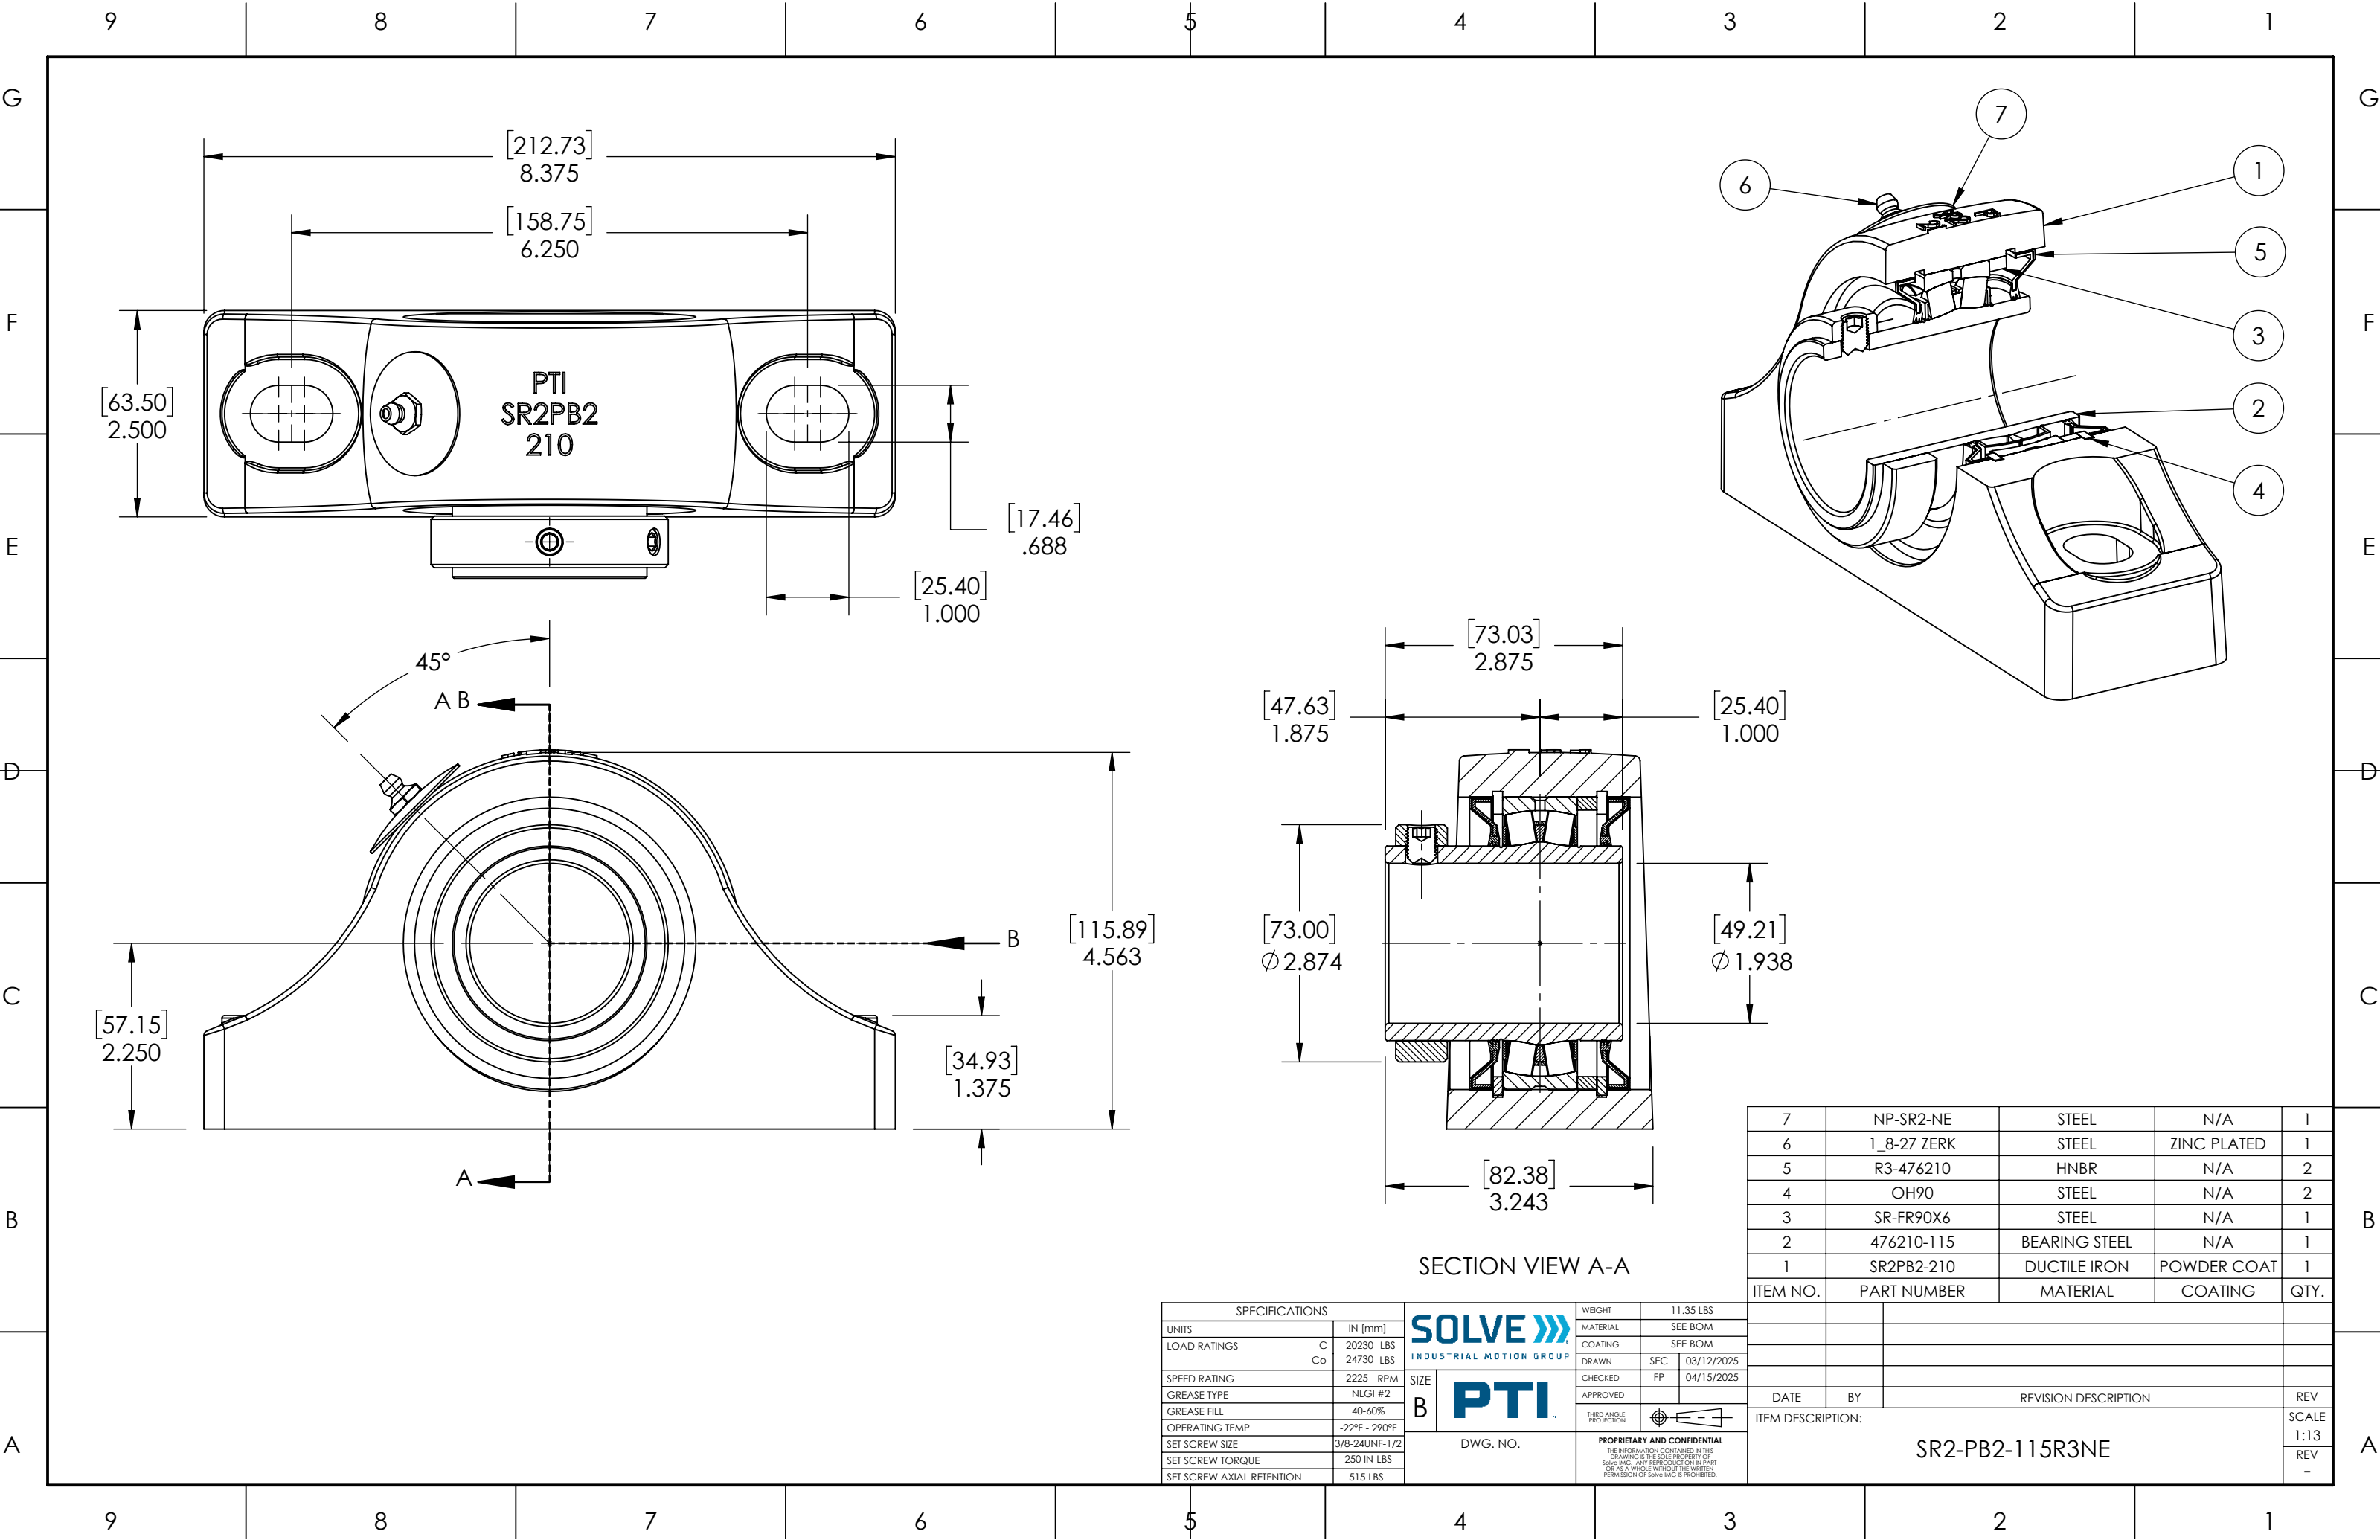

SECTION VIEW A-A

7	NP-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476210	HNBR	N/A	2
4	OH90	STEEL	N/A	2
3	SR-FR90X6	STEEL	N/A	1
2	476210-115	BEARING STEEL	N/A	1
1	SR2PB2-210	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		11.35 LBS	
LOAD RATINGS	C 20230 LBS Co 24730 LBS	MATERIAL		SEE BOM	
SPEED RATING	2225 RPM	COATING		SEE BOM	
GREASE TYPE	NLGI #2	DRAWN		SEC 03/12/2025	
GREASE FILL	40-60%	CHECKED		FP 04/15/2025	
OPERATING TEMP	-22°F - 290°F	APPROVED			
SET SCREW SIZE	3/8-24UNF-1/2	DWG. NO.		PROPRIETARY AND CONFIDENTIAL	
SET SCREW TORQUE	250 IN-LBS	SIZE		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW AXIAL RETENTION	515 LBS	B			

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SR2-PB2-115R3NE			1:13
			REV
			-