


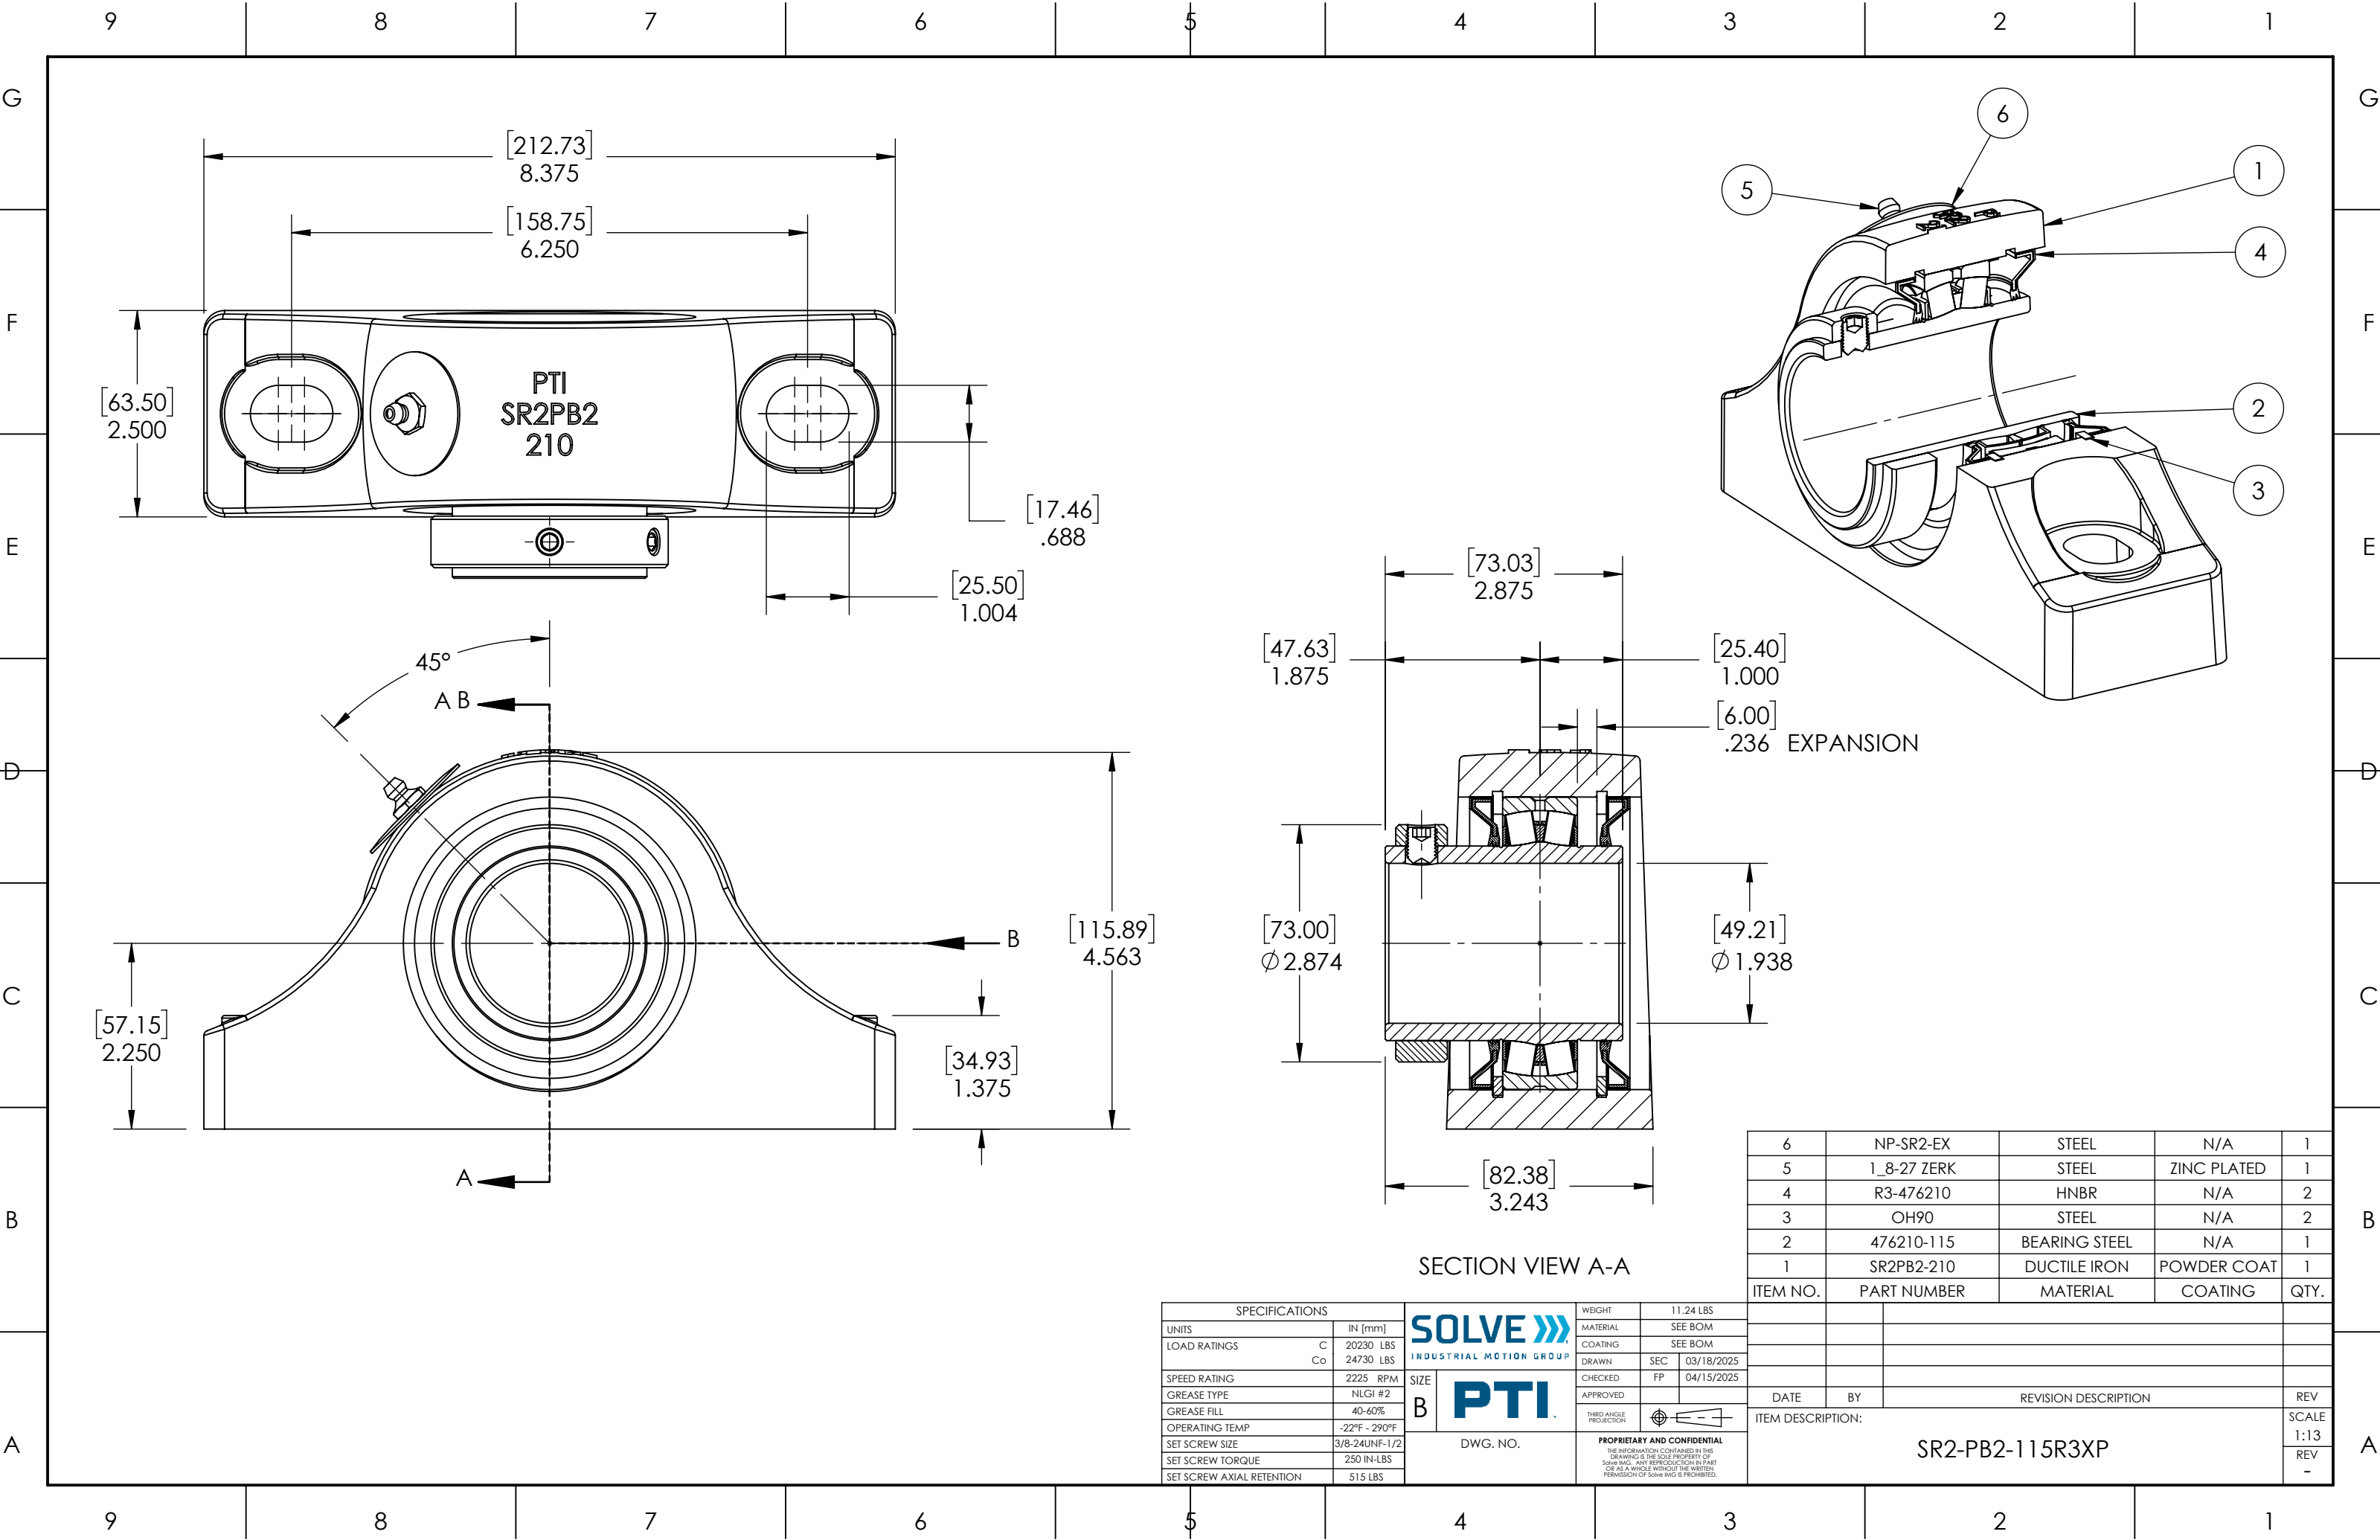

SECTION VIEW A-A

SPECIFICATIONS				SOLVE 		WEIGHT	
UNITS		IN [mm]		MATERIAL		SEE BOM	
LOAD RATINGS	C	20230 LBS		COATING		SEE BOM	
	Co	24730 LBS		DRAWN		SEC	03/18/2025
SPEED RATING		2225 RPM		CHECKED		FP	04/15/2025
GREASE TYPE		NLGI #2		APPROVED			
GREASE FILL		40-60%		THIRD ANGLE PROJECTION			
OPERATING TEMP		-22°F - 290°F		DWG. NO.		PROPRIETARY AND CONFIDENTIAL	
SET SCREW SIZE		3/8-24UNF-1/2				THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE		250 IN-LBS					
SET SCREW AXIAL RETENTION		515 LBS					

6	NP-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476210	HNBR	N/A	2
3	OH90	STEEL	N/A	2
2	476210-115	BEARING STEEL	N/A	1
1	SR2PB2-210	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION	REV
		SR2-PB2-115R3XP	1:13
			REV
			-