
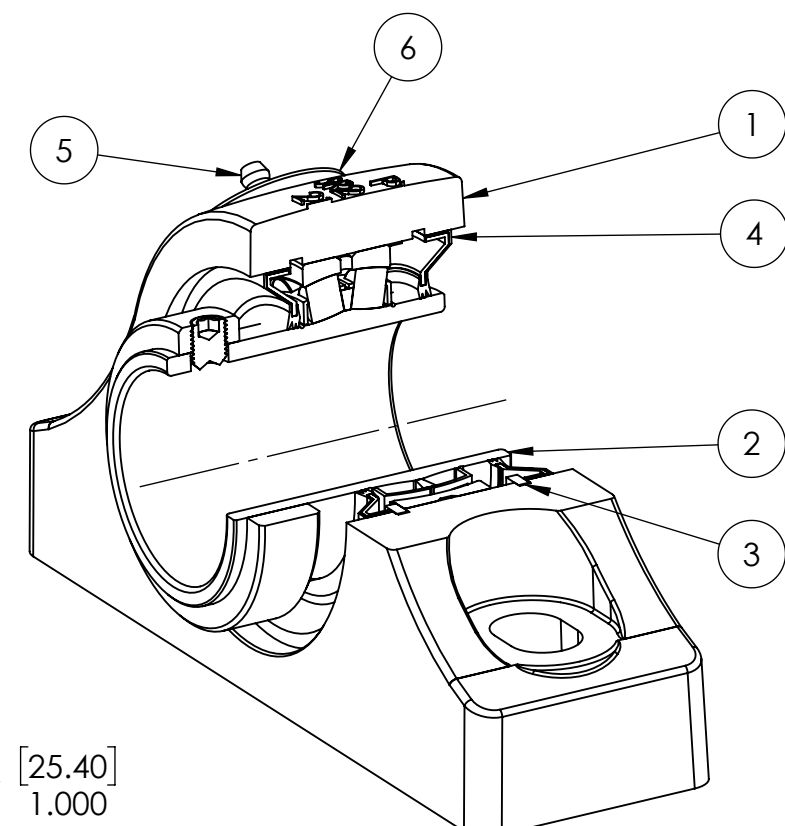
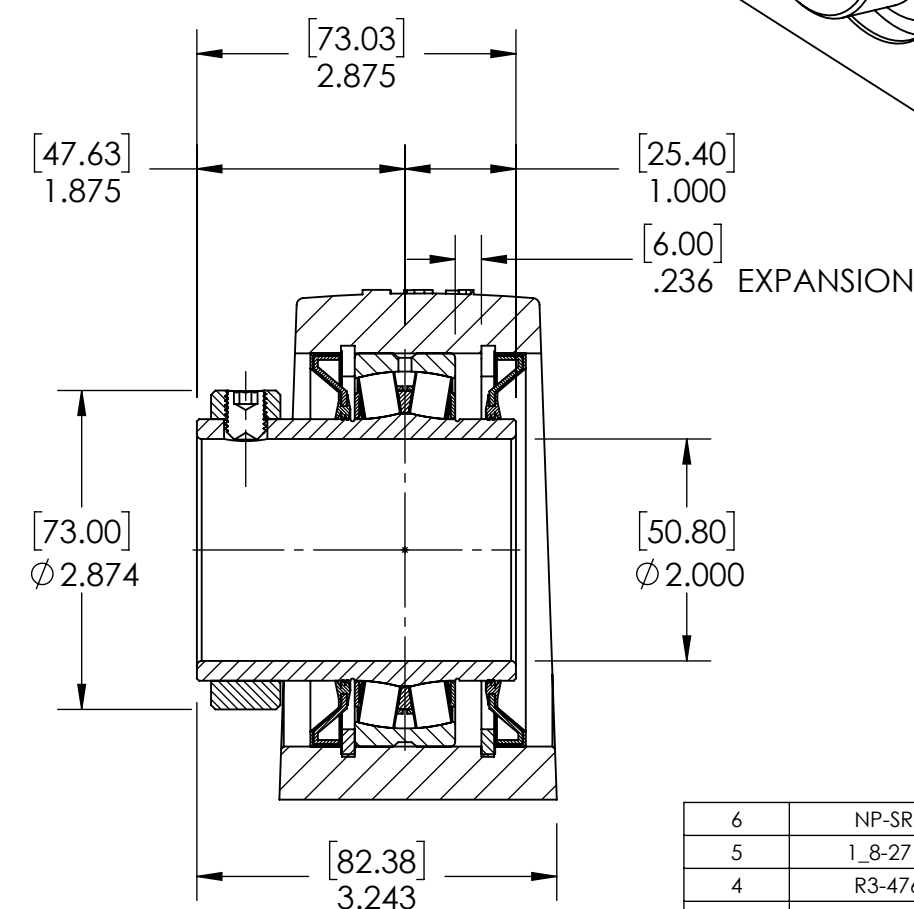
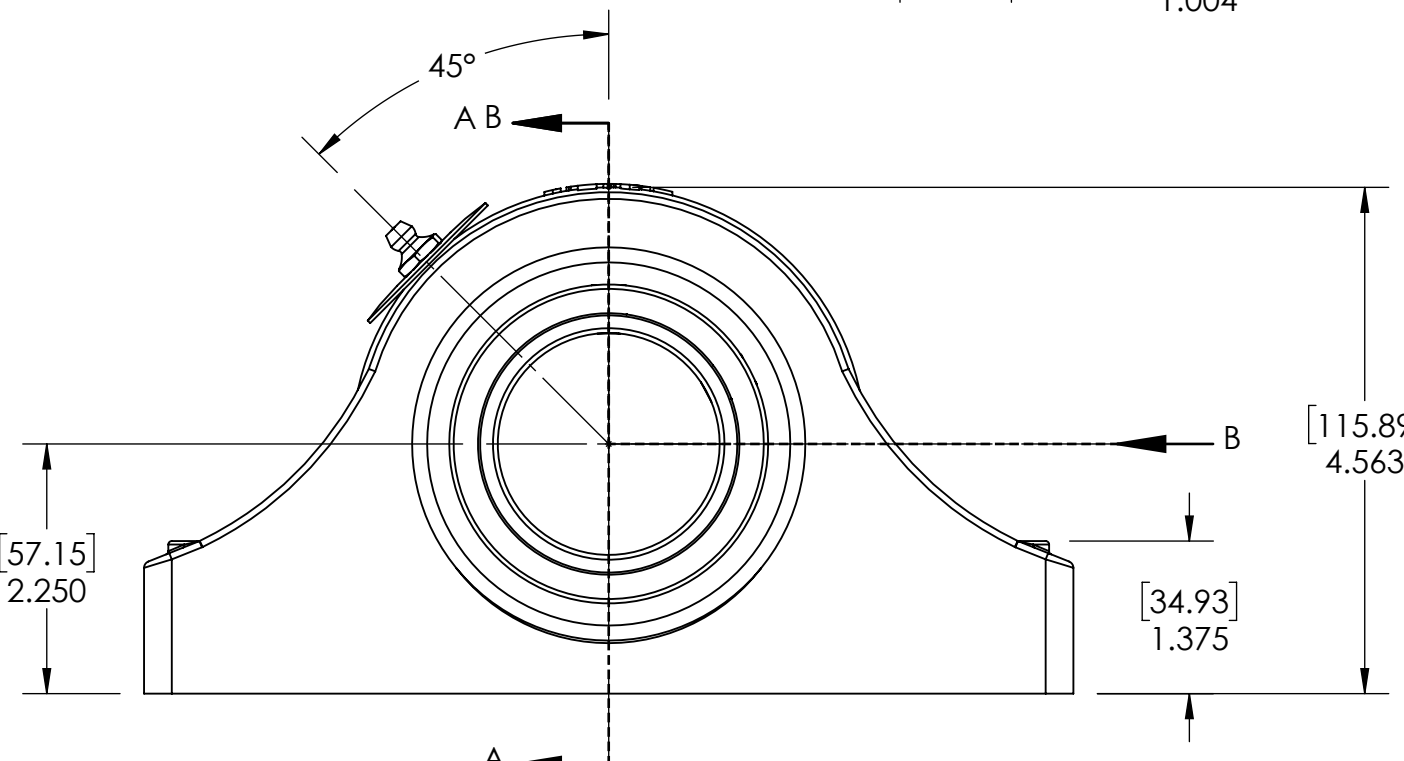
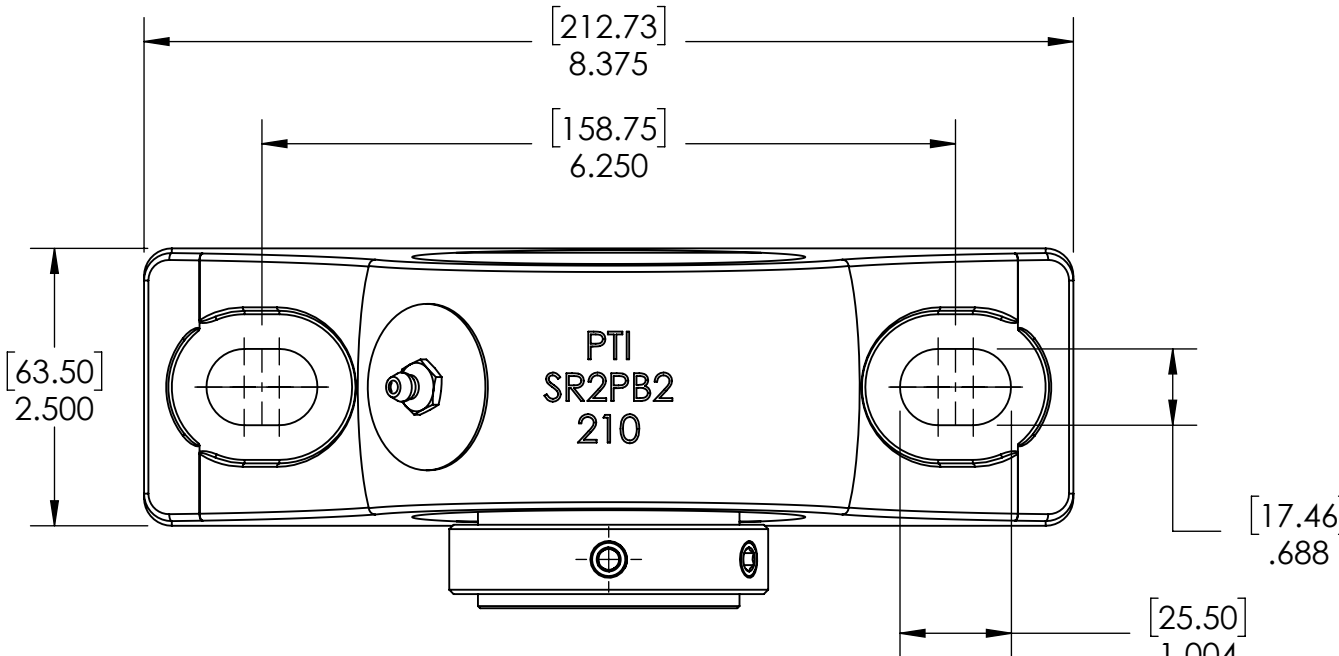


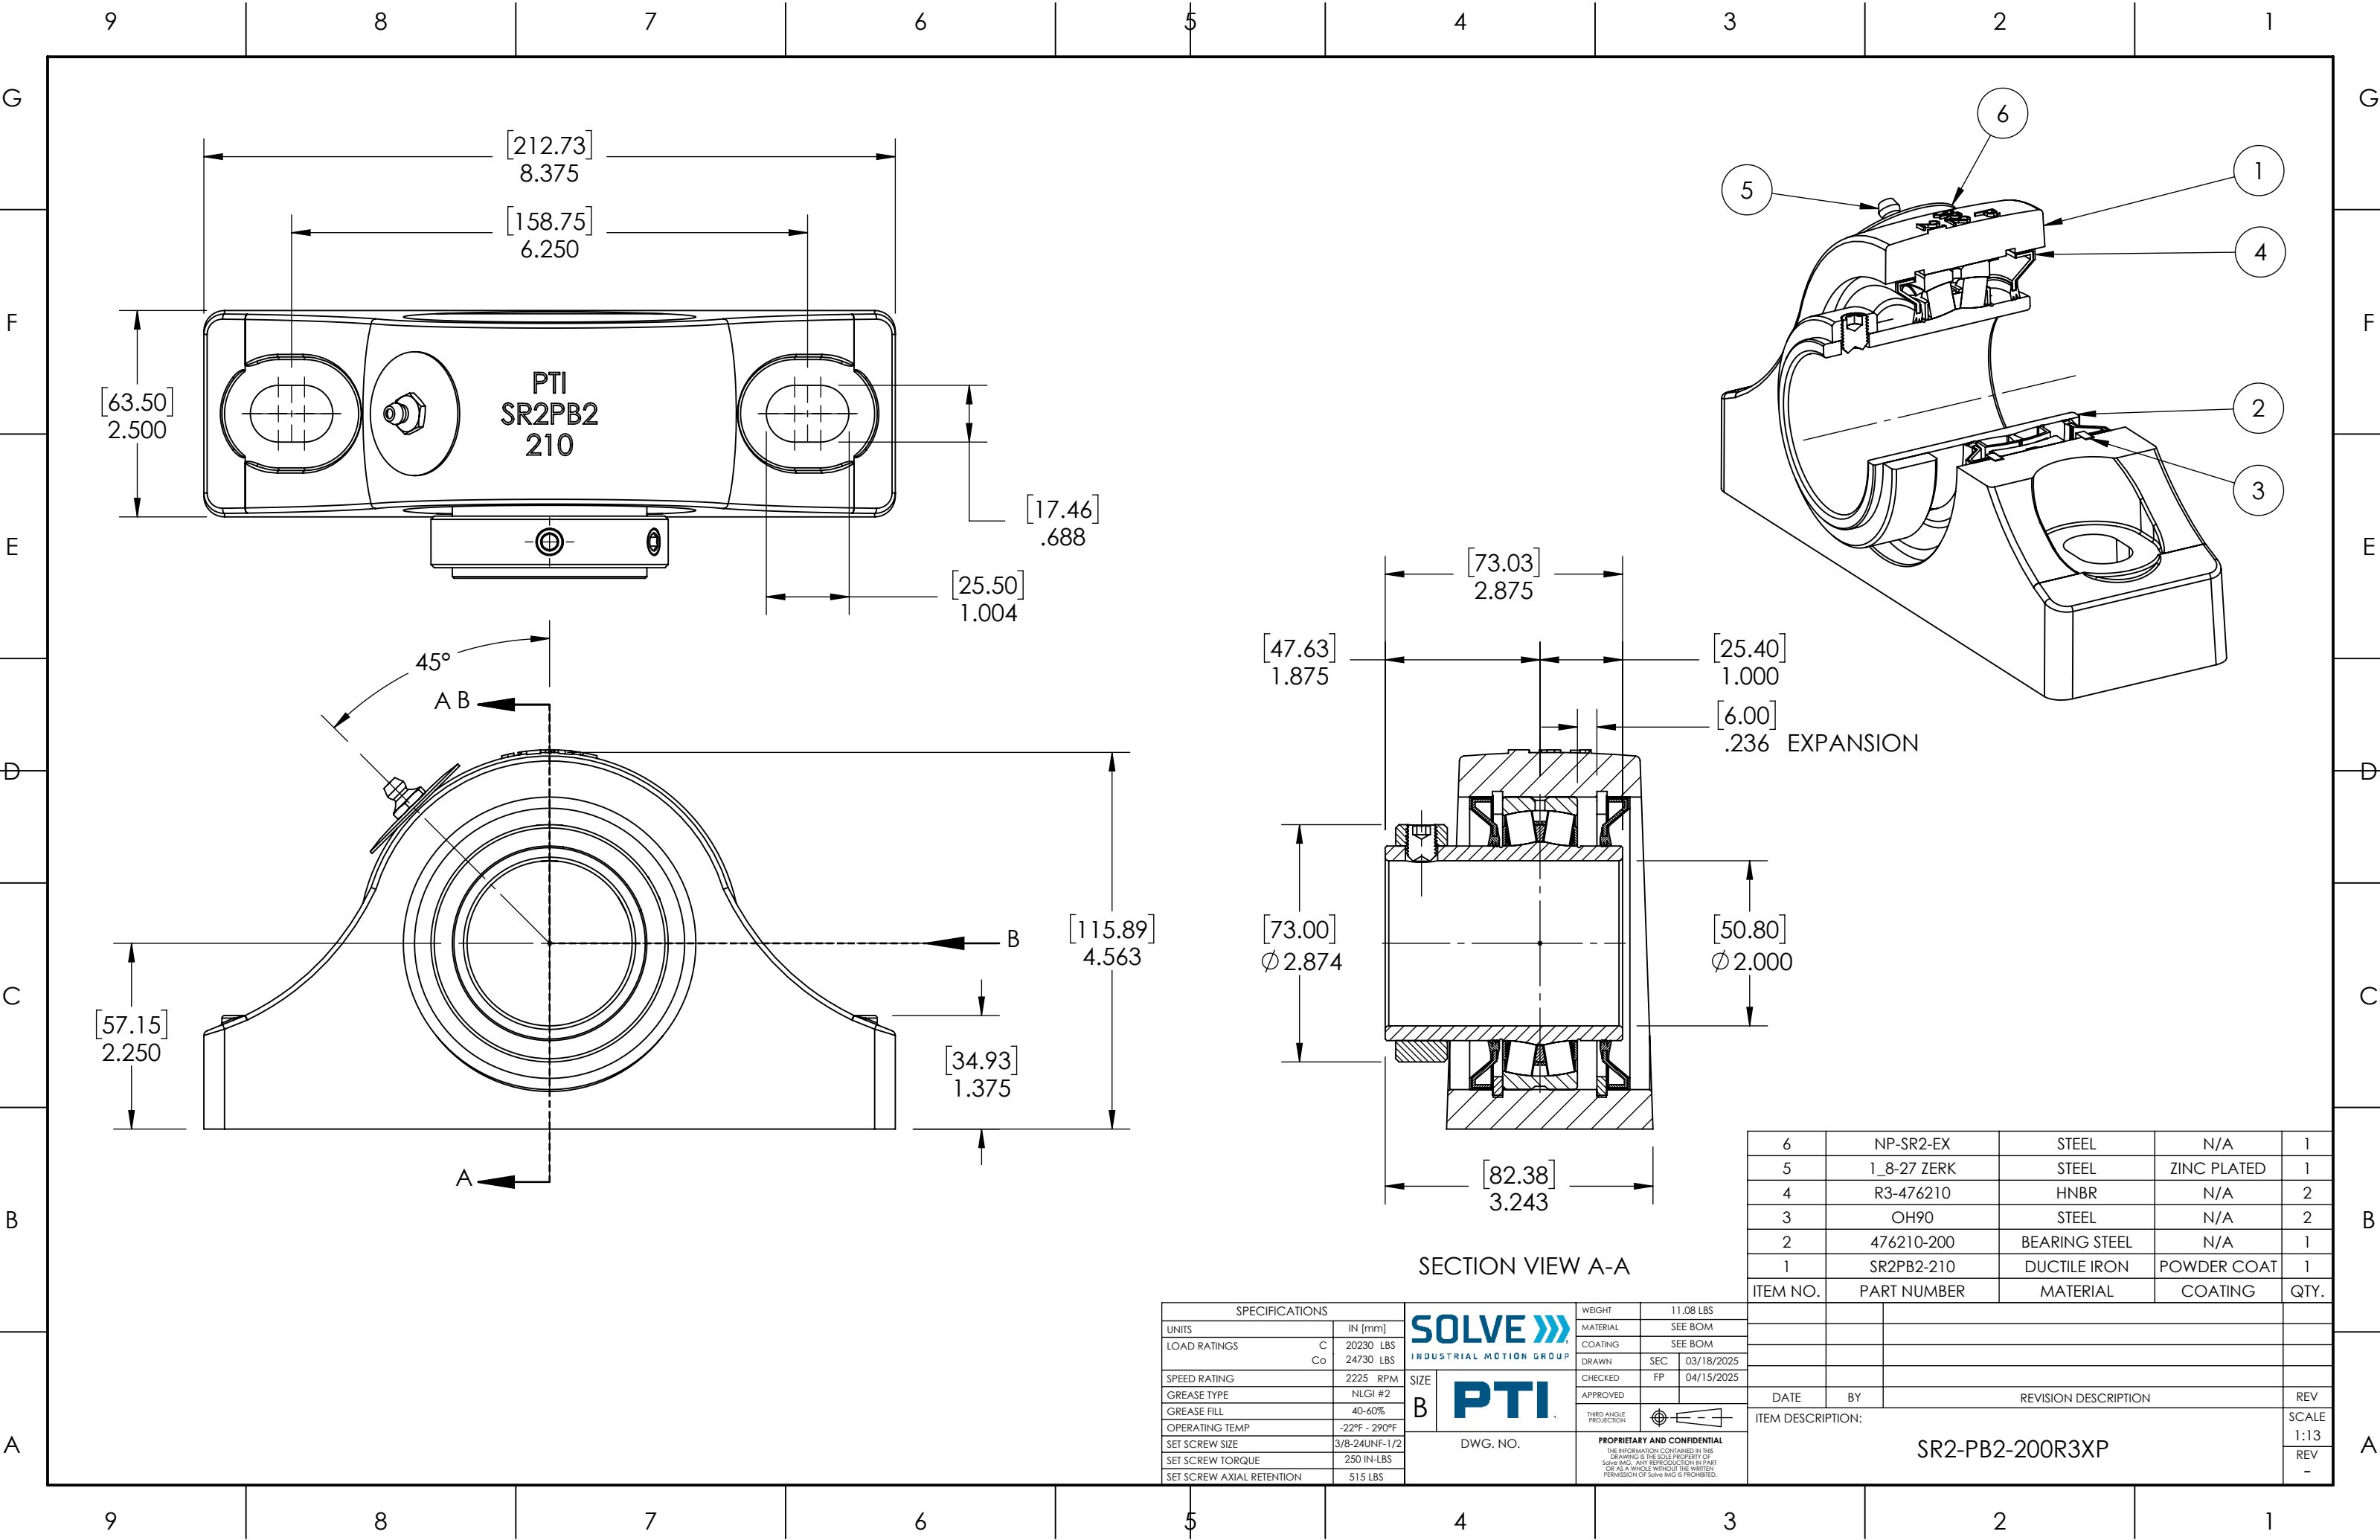

SECTION VIEW A-A

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co	PTI		COATING	SEE BOM
SPEED RATING	2225 RPM	DWG. NO.		DRAWN	SEC 03/18/2025
GREASE TYPE	NLGI #2	B		CHECKED	FP 04/15/2025
GREASE FILL	40-60%	APPROVED		THIRD ANGLE PROJECTION	
OPERATING TEMP	-22°F - 290°F	PROPRIETARY AND CONFIDENTIAL		DATE	
SET SCREW SIZE	3/8-24UNF-1/2	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		BY	
SET SCREW TORQUE	250 IN-LBS			REVISION DESCRIPTION	
SET SCREW AXIAL RETENTION	515 LBS			REV	

ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
6	NP-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476210	HNBR	N/A	2
3	OH90	STEEL	N/A	2
2	476210-200	BEARING STEEL	N/A	1
1	SR2PB2-210	DUCTILE IRON	POWDER COAT	1
SR2-PB2-200R3XP				
SCALE 1:13				
REV -				