
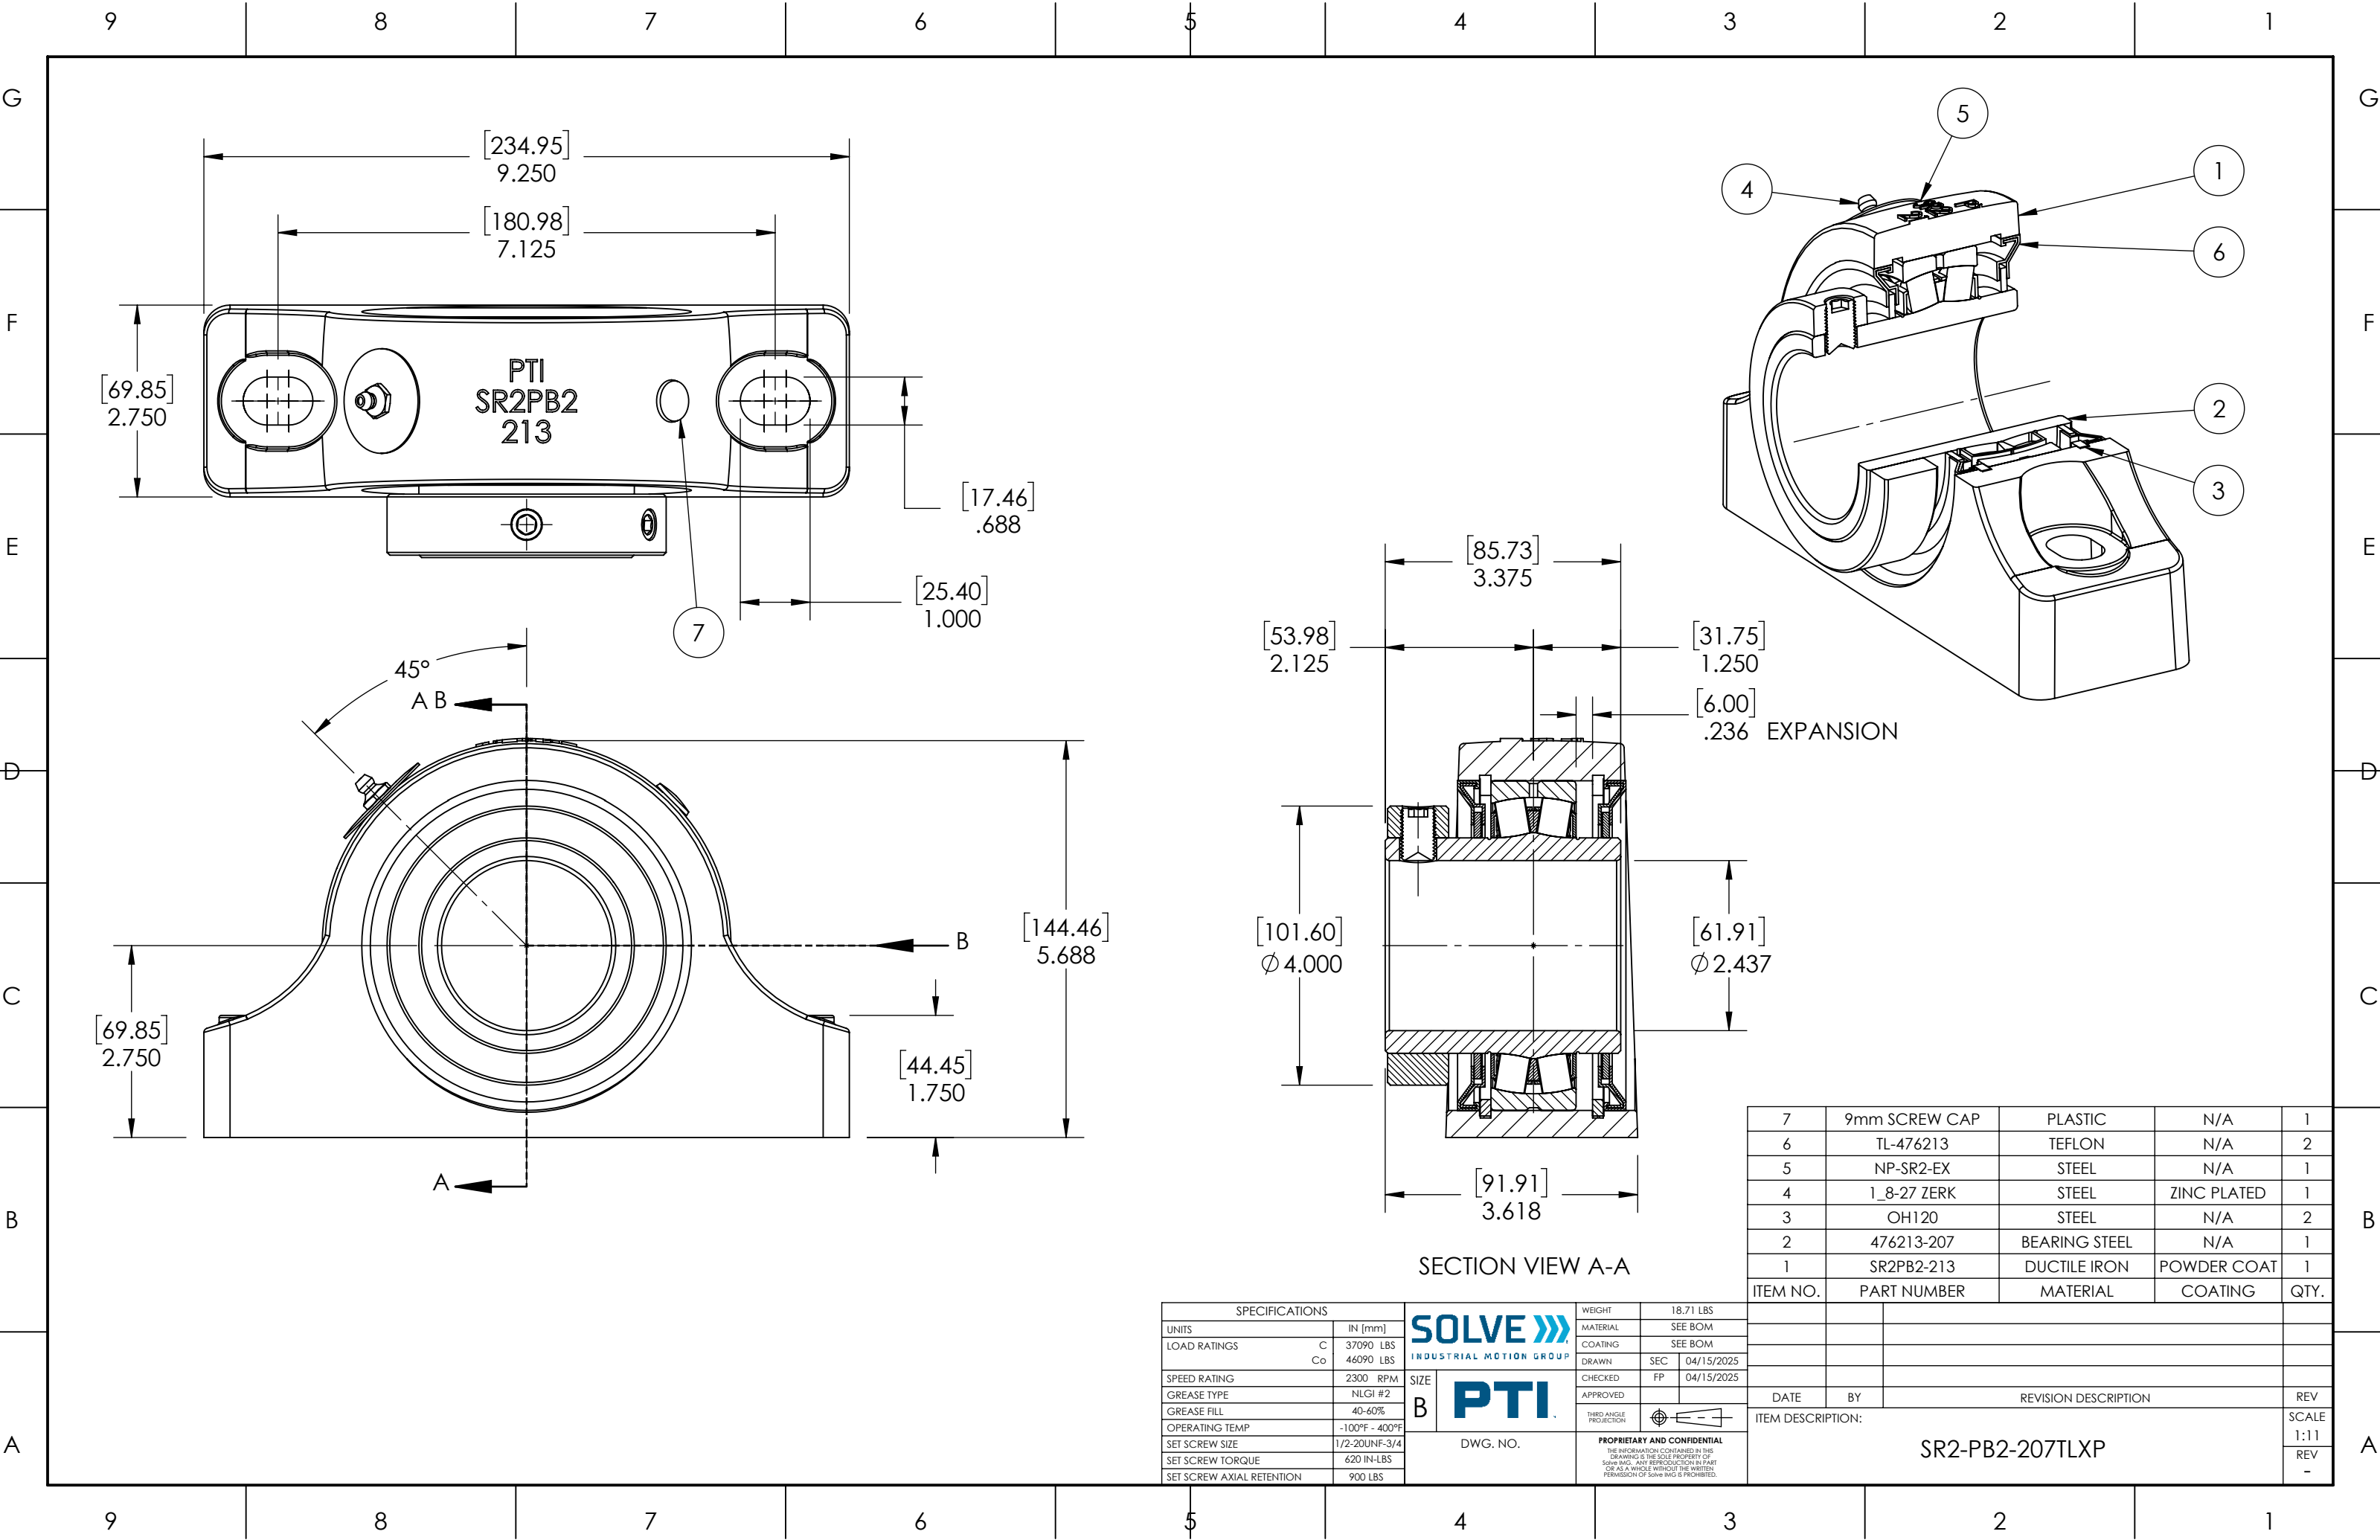




SECTION VIEW A-A

7	9mm SCREW CAP	PLASTIC	N/A	1
6	TL-476213	TEFLON	N/A	2
5	NP-SR2-EX	STEEL	N/A	1
4	1_8-27 ZERK	STEEL	ZINC PLATED	1
3	OH120	STEEL	N/A	2
2	476213-207	BEARING STEEL	N/A	1
1	SR2PB2-213	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	18.71 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C 37090 LBS Co 46090 LBS	SIZE B 		COATING	SEE BOM
SPEED RATING	2300 RPM	DWG. NO.		DRAWN	SEC 04/15/2025
GREASE TYPE	NLGI #2	APPROVED 		CHECKED	FP 04/15/2025
GREASE FILL	40-60%	THIRD ANGLE PROJECTION 		DATE BY REVISION DESCRIPTION	
OPERATING TEMP	-100°F - 400°F	PROPRIETARY AND CONFIDENTIAL		ITEM DESCRIPTION: SR2-PB2-207TLXP	
SET SCREW SIZE	1/2-20UNF-3/4	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		REV 1:11	
SET SCREW TORQUE	620 IN-LBS			REV -	
SET SCREW AXIAL RETENTION	900 LBS				