


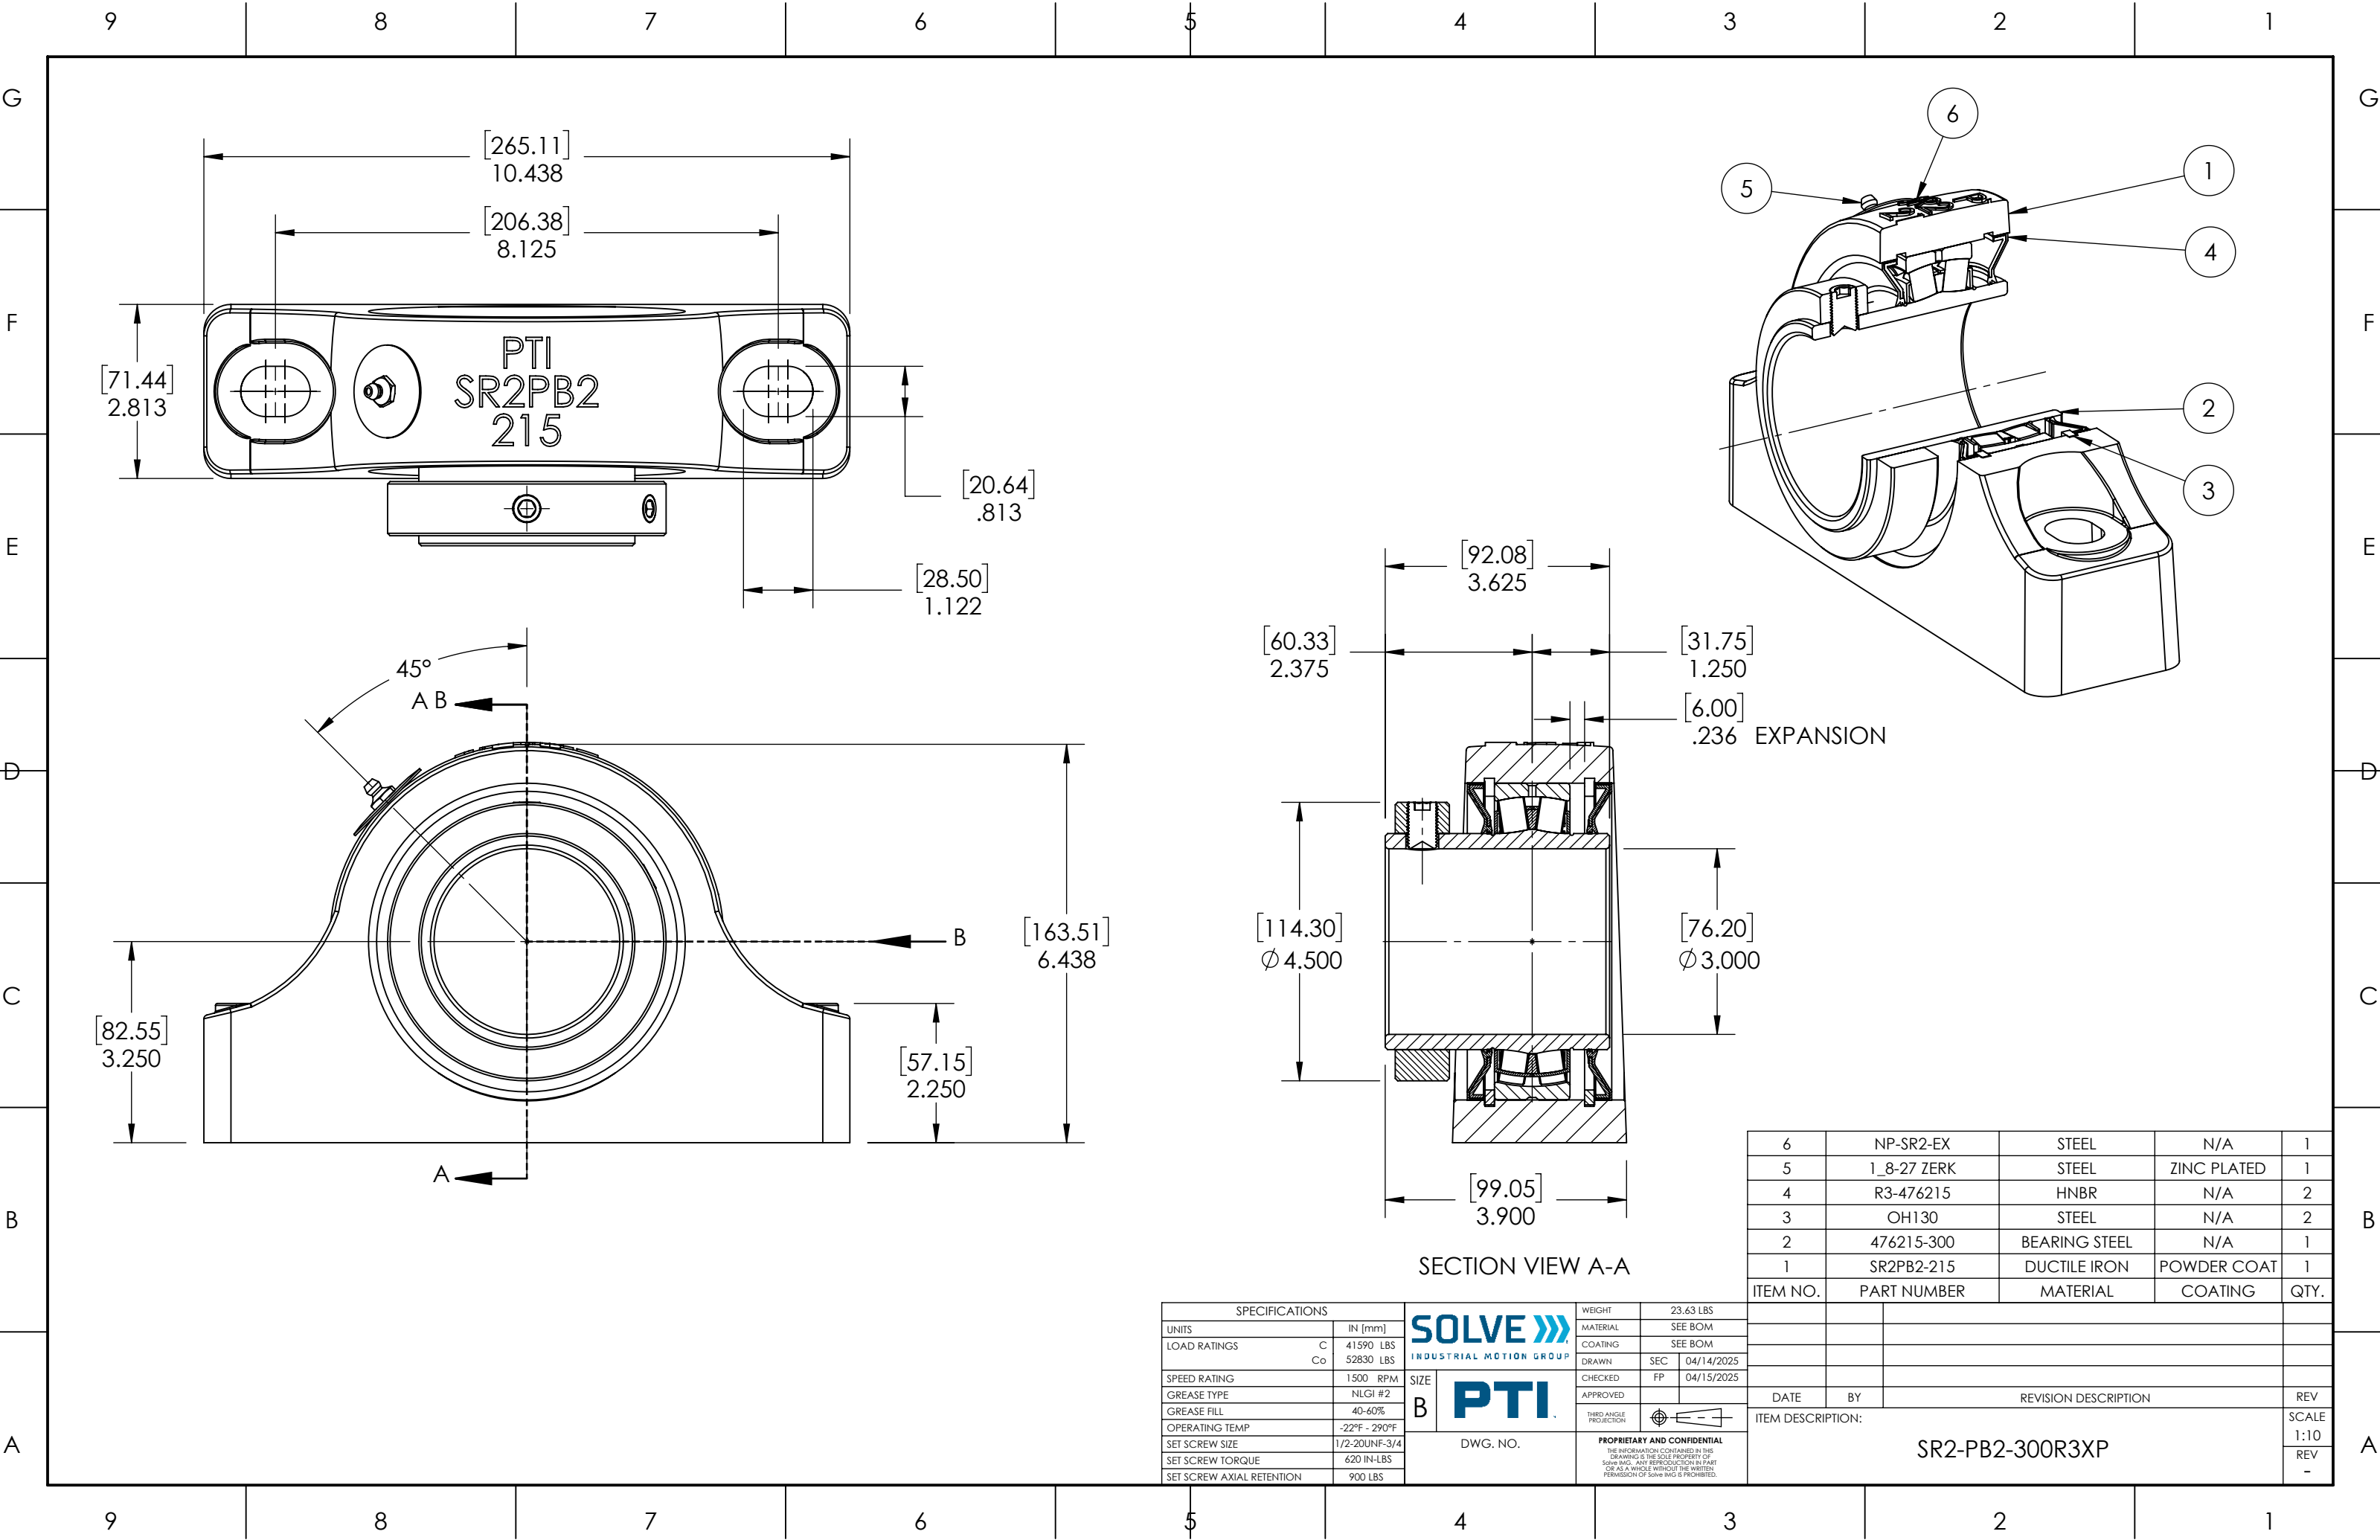

SECTION VIEW A-A

6	NP-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-300	BEARING STEEL	N/A	1
1	SR2PB2-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	23.63 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co	PTI		COATING	SEE BOM
SPEED RATING	1500 RPM	SIZE	B	DRAWN	SEC 04/14/2025
GREASE TYPE	NLGI #2	DWG. NO.		CHECKED	FP 04/15/2025
GREASE FILL	40-60%	APPROVED		APPROVED	
OPERATING TEMP	-22°F - 290°F	THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION	
SET SCREW SIZE	1/2-20UNF-3/4	PROPRIETARY AND CONFIDENTIAL		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS				
SET SCREW AXIAL RETENTION	900 LBS				

DATE	BY	REVISION DESCRIPTION	REV
		SR2-PB2-300R3XP	1
			1:10
			REV