


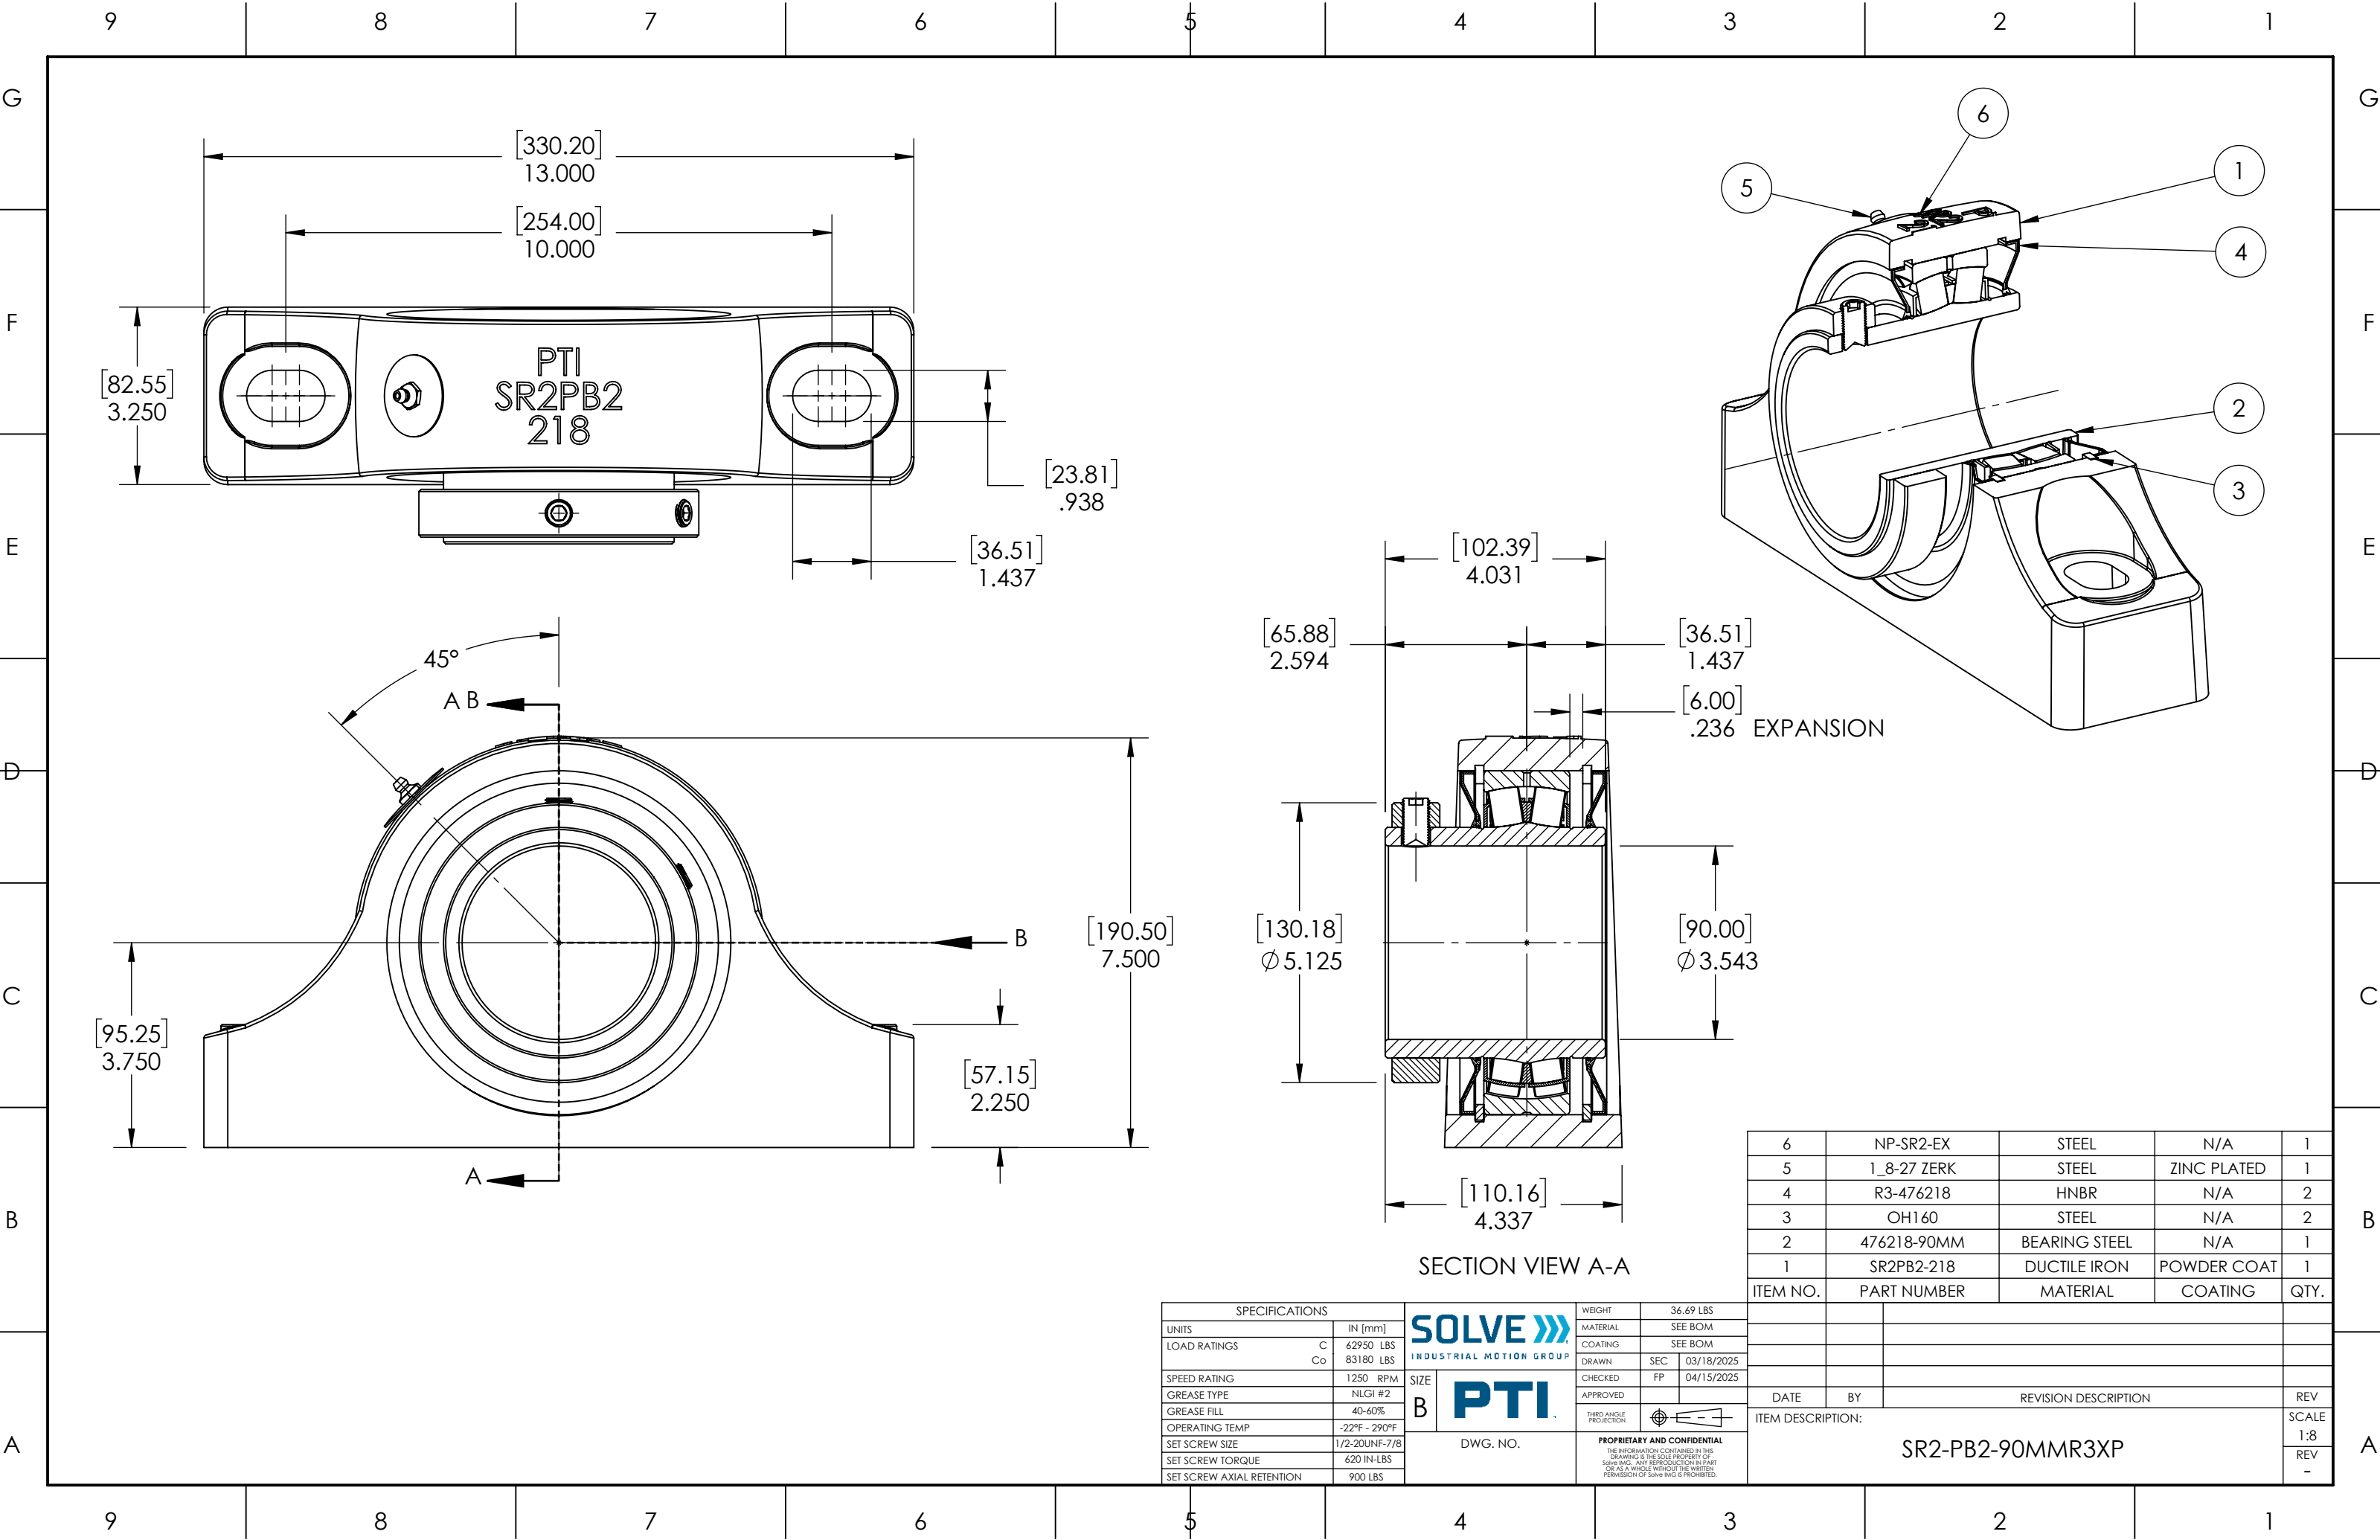

SPECIFICATIONS			
UNITS	IN [mm]		
LOAD RATINGS	C 62950 LBS Co 83180 LBS		
SPEED RATING	1250 RPM		
GREASE TYPE	NLGI #2		
GREASE FILL	40-60%		
OPERATING TEMP	-22°F - 290°F		
SET SCREW SIZE	1/2-20UNF-7/8		
SET SCREW TORQUE	620 IN-LBS		
SET SCREW AXIAL RETENTION	900 LBS		

SOLVE 		WEIGHT	36.69 LBS
INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
		COATING	SEE BOM
		DRAWN	SEC 03/18/2025
		CHECKED	FP 04/15/2025
		APPROVED	
		THIRD ANGLE PROJECTION	
		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	

SIZE	B
B	PTI
DWG. NO.	

6	NP-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476218	HNBR	N/A	2
3	OH160	STEEL	N/A	2
2	476218-90MM	BEARING STEEL	N/A	1
1	SR2PB2-218	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION:				SCALE
SR2-PB2-90MMMR3XP				1:8
				REV
				-