
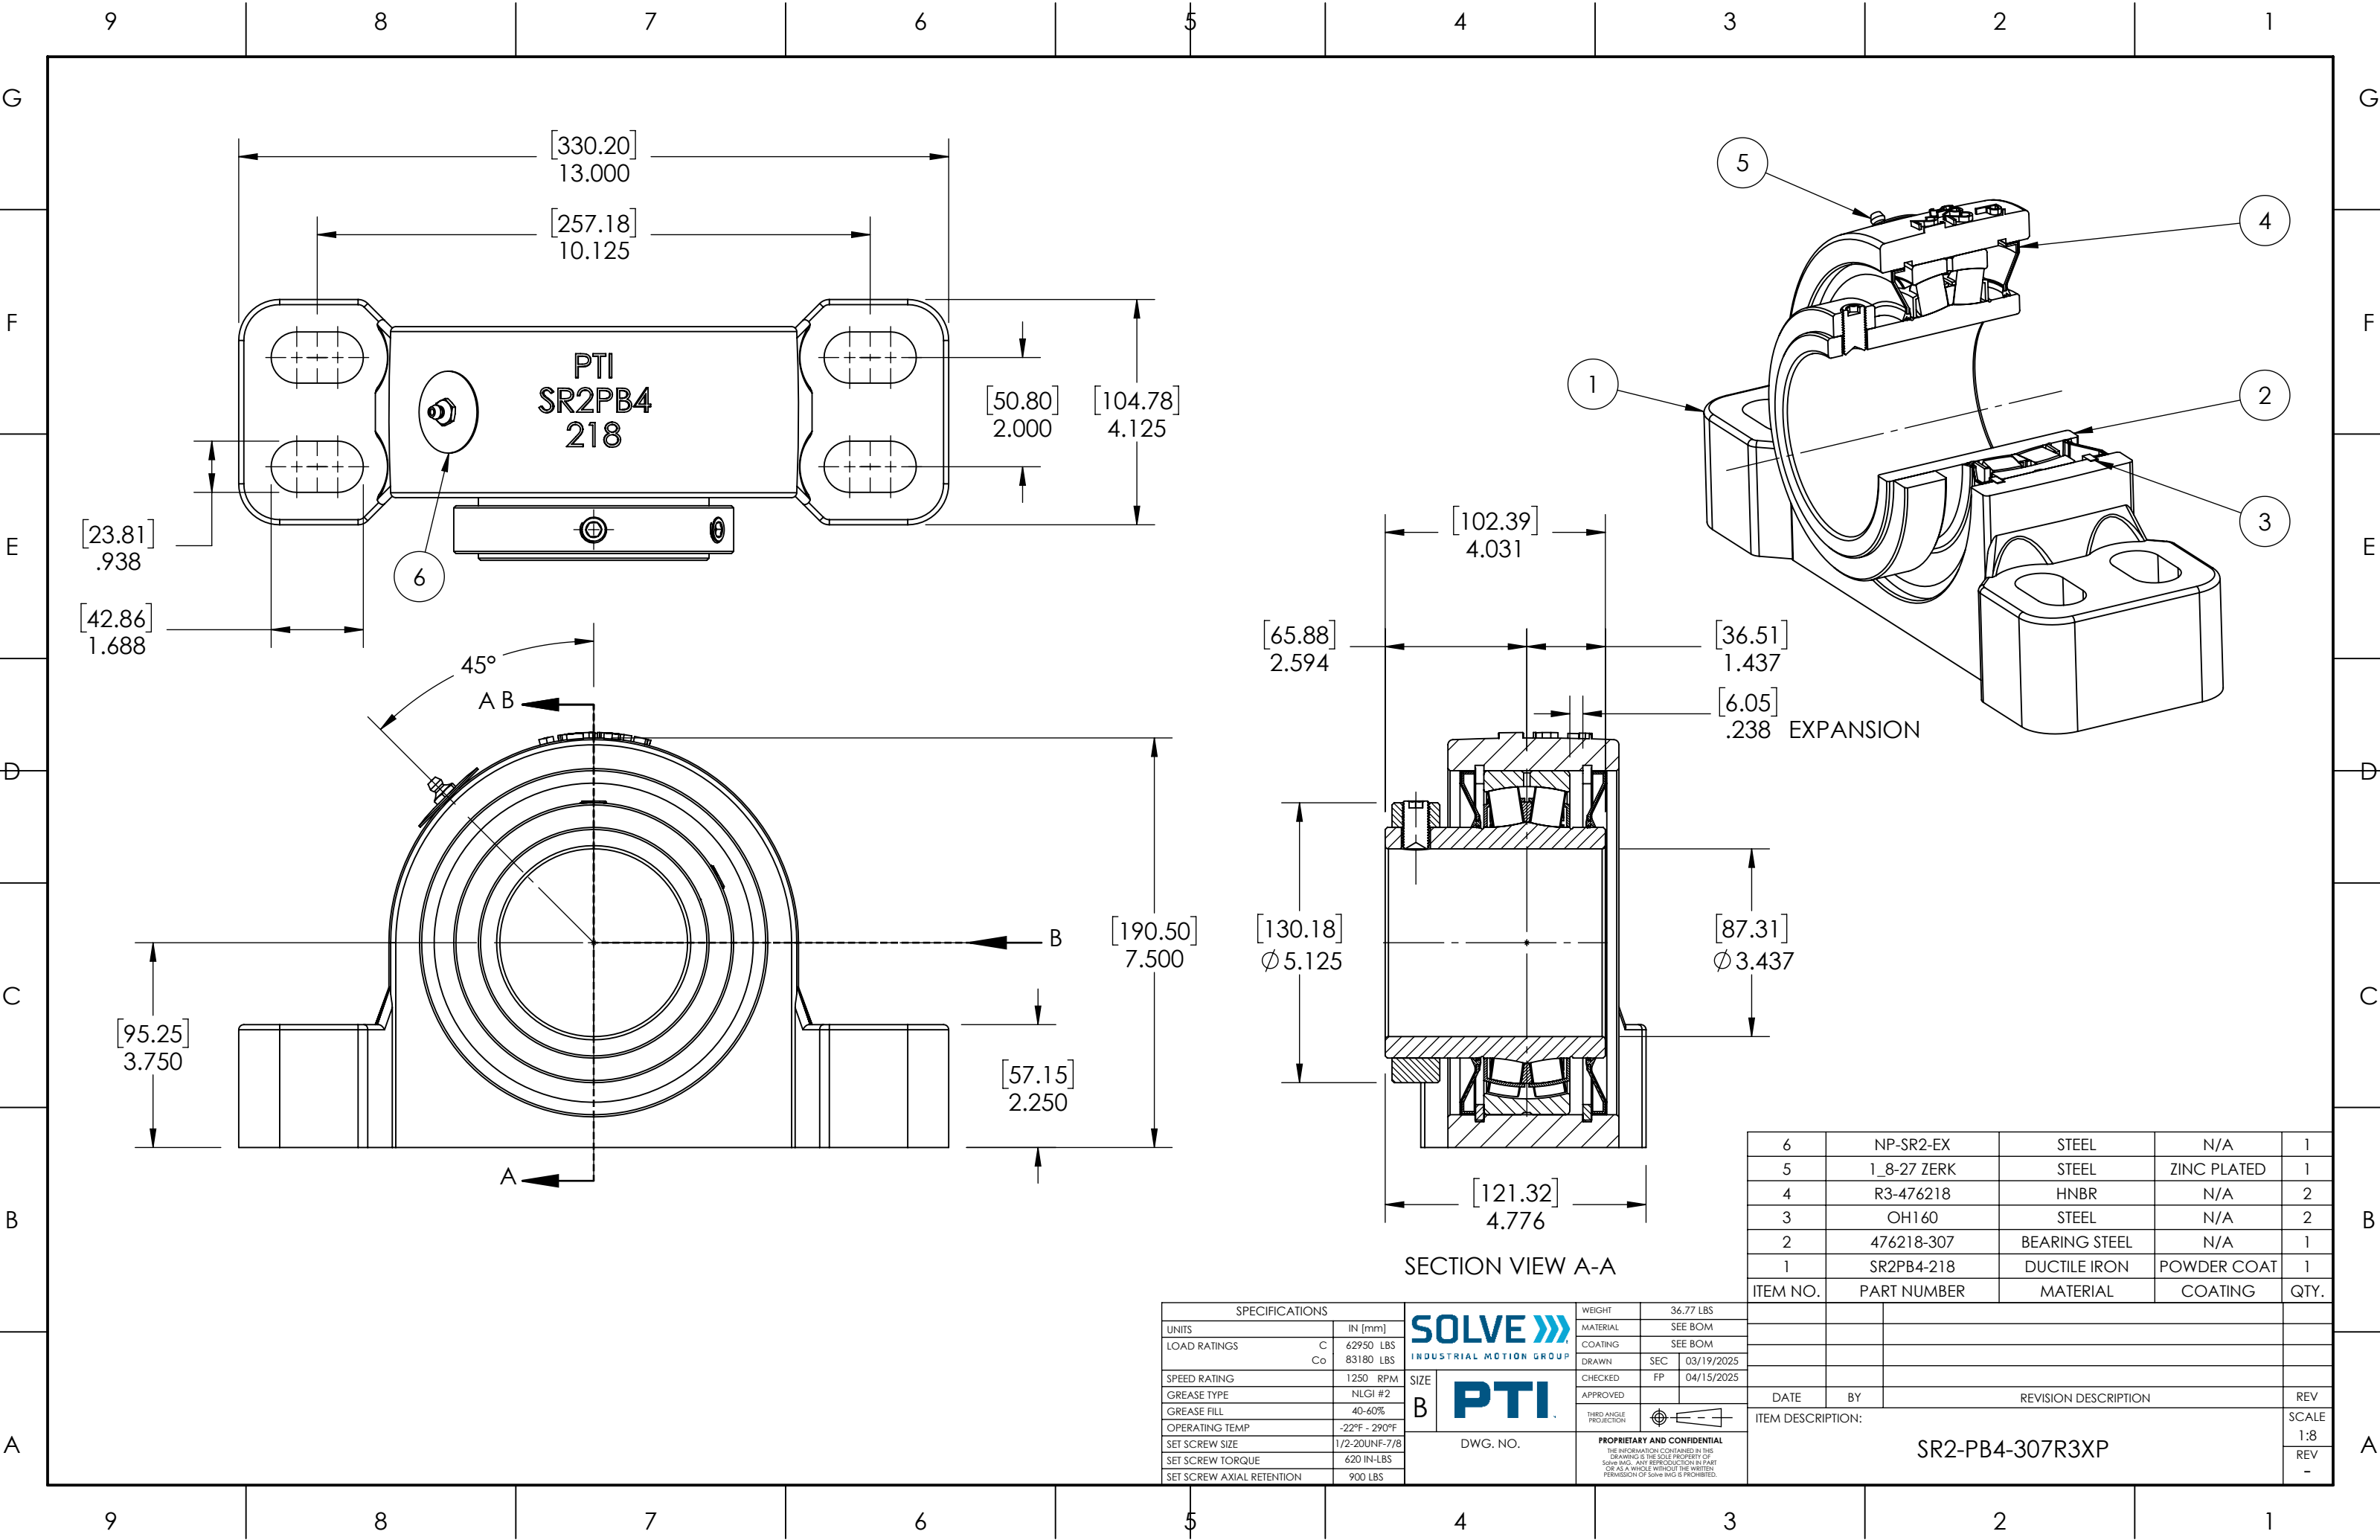




SPECIFICATIONS			
UNITS		IN [mm]	
LOAD RATINGS	C	62950 LBS	
	Co	83180 LBS	
SPEED RATING		1250 RPM	
GREASE TYPE		NLGI #2	
GREASE FILL		40-60%	
OPERATING TEMP		-22°F - 290°F	
SET SCREW SIZE		1/2-20UNF-7/8	
SET SCREW TORQUE		620 IN-LBS	
SET SCREW AXIAL RETENTION		900 LBS	

SOLVE 		WEIGHT	36.77 LBS
INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
		COATING	SEE BOM
		DRAWN	SEC 03/19/2025
		CHECKED	FP 04/15/2025
		APPROVED	
		THIRD ANGLE PROJECTION	
		PROPRIETARY AND CONFIDENTIAL	
		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.	

SIZE	B	PTI	DWG. NO.

6	NP-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476218	HNBR	N/A	2
3	OH160	STEEL	N/A	2
2	476218-307	BEARING STEEL	N/A	1
1	SR2PB4-218	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION: SR2-PB4-307R3XP				SCALE
				1:8
				REV -