
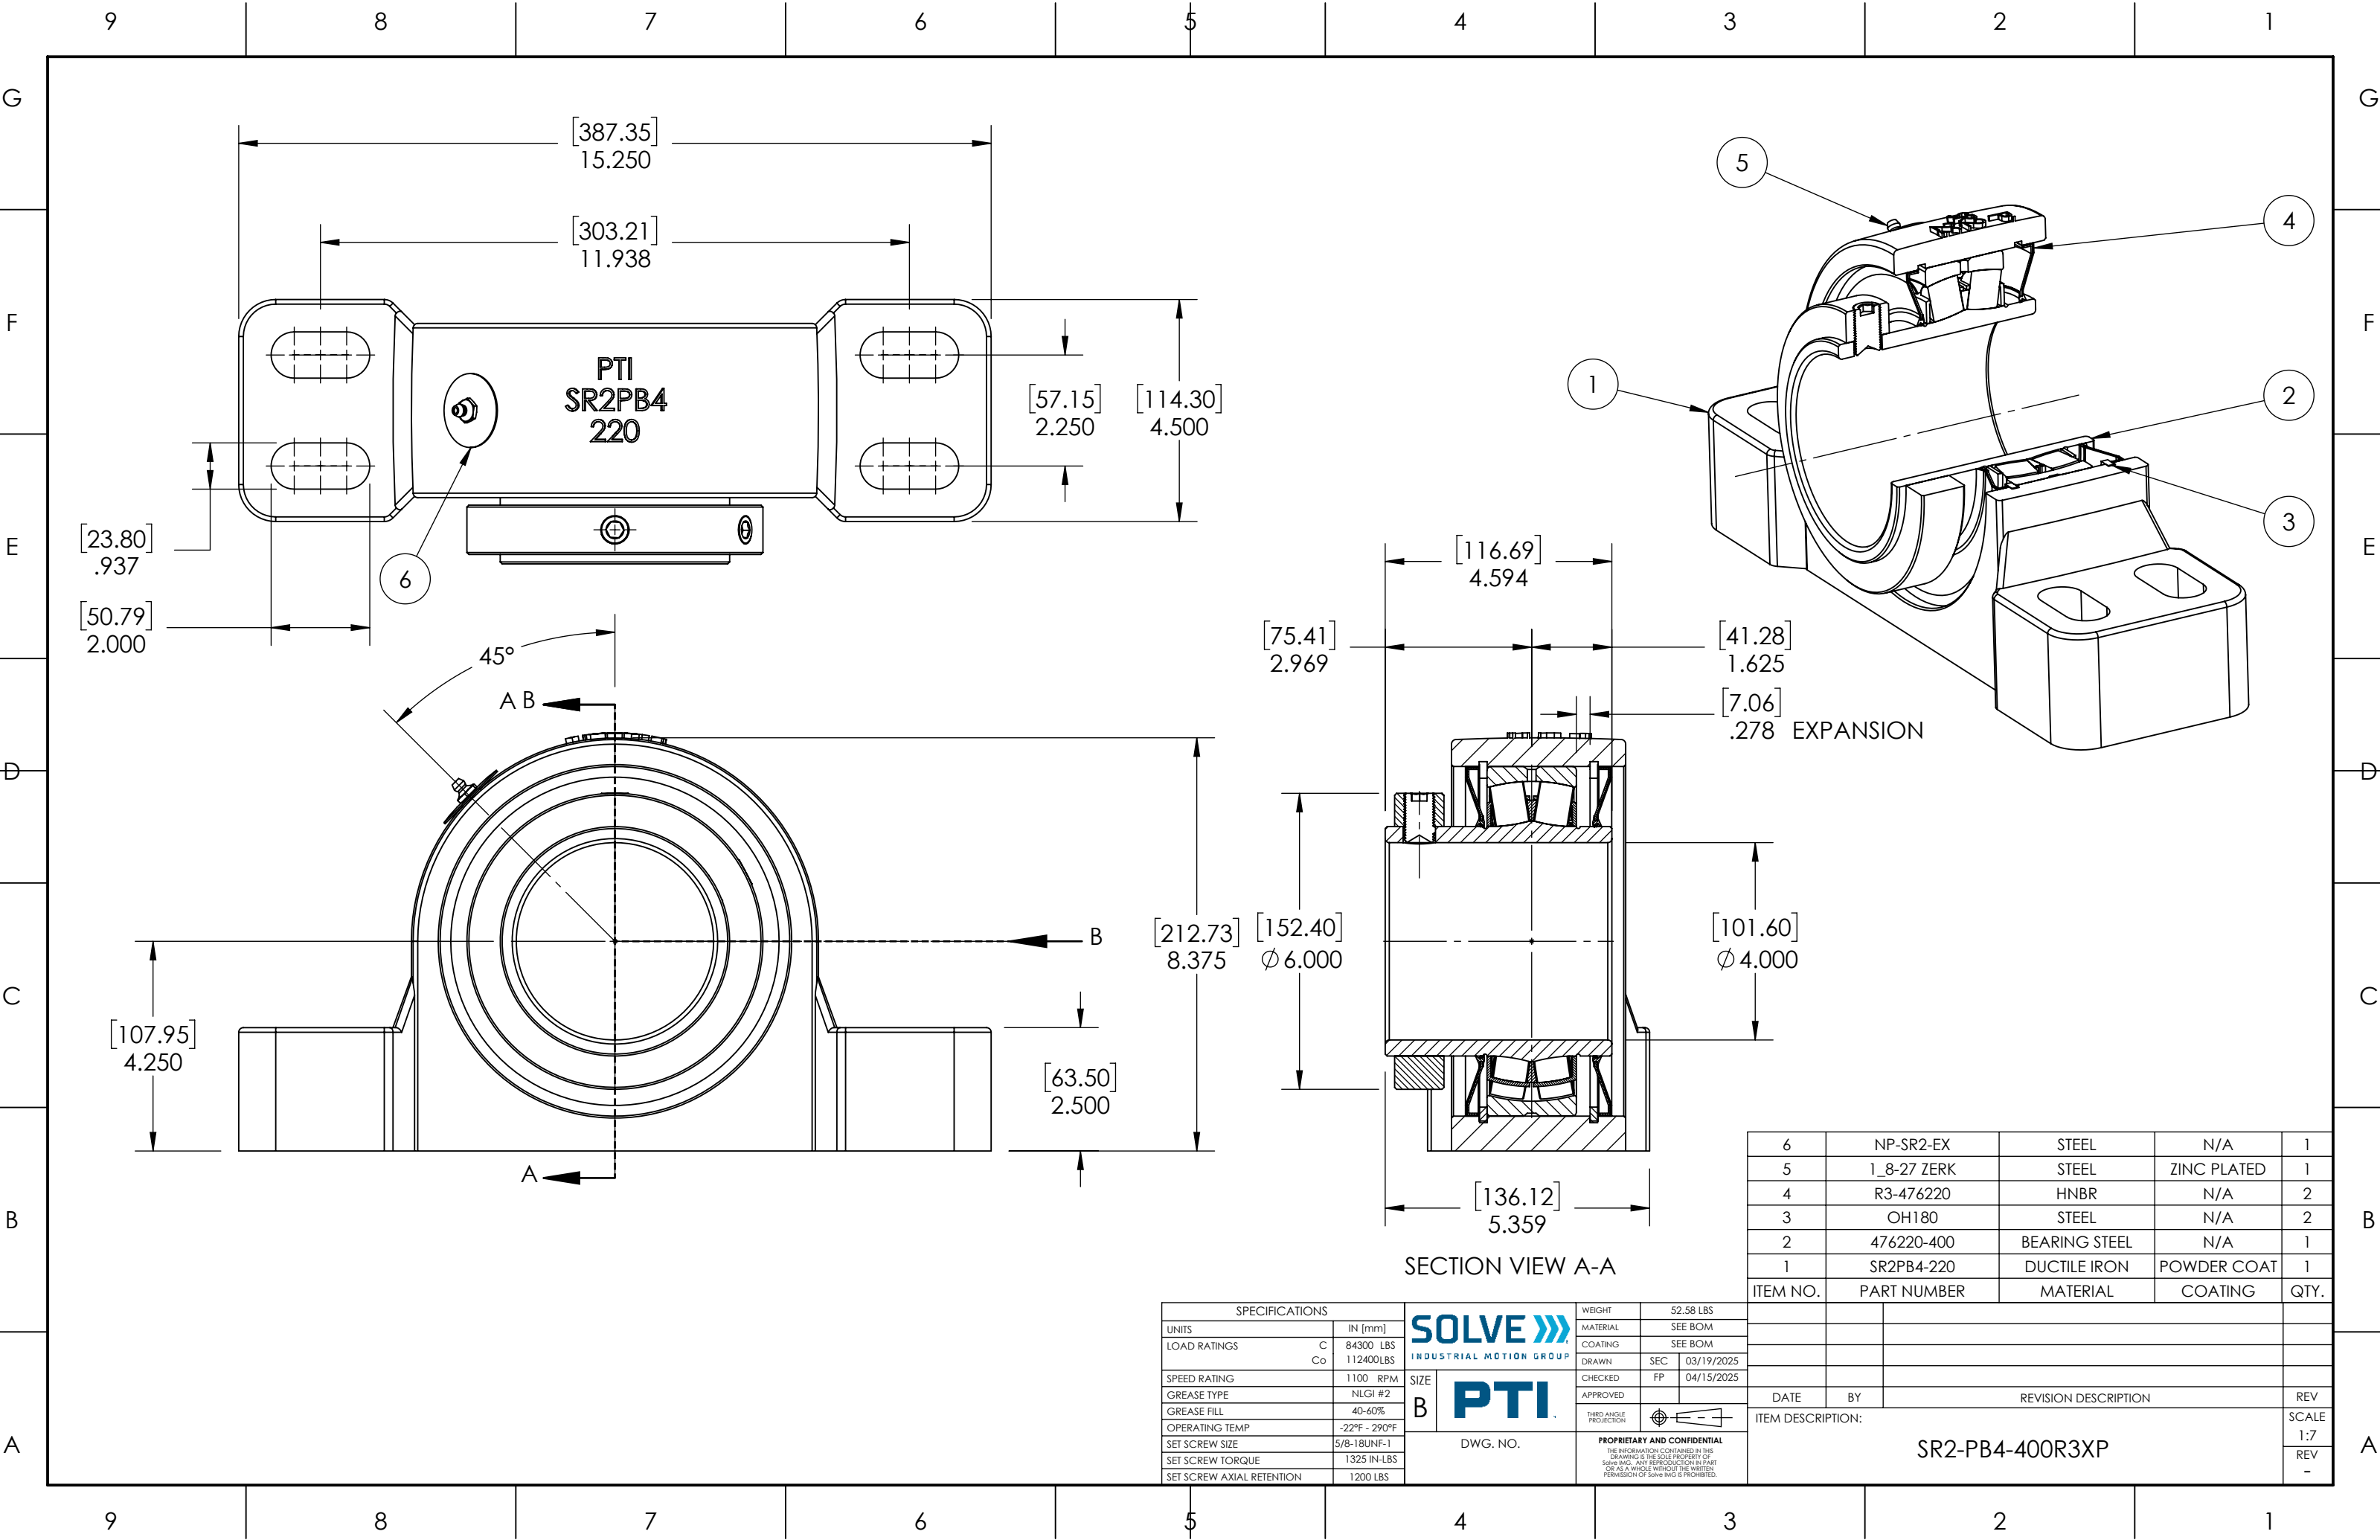




SPECIFICATIONS			
UNITS	IN [mm]	SOLVE 	
LOAD RATINGS	C 84300 LBS Co 112400LBS	MATERIAL SEE BOM	
SPEED RATING	1100 RPM	COATING SEE BOM	
GREASE TYPE	NLGI #2	DRAWN SEC 03/19/2025	
GREASE FILL	40-60%	CHECKED FP 04/15/2025	
OPERATING TEMP	-22°F - 290°F	APPROVED 	
SET SCREW SIZE	5/8-18UNF-1	THIRD ANGLE PROJECTION 	
SET SCREW TORQUE	1325 IN-LBS	DWG. NO.	
SET SCREW AXIAL RETENTION	1200 LBS	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMAGING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMAGING IS PROHIBITED.	

6	NP-SR2-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476220	HNBR	N/A	2
3	OH180	STEEL	N/A	2
2	476220-400	BEARING STEEL	N/A	1
1	SR2PB4-220	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION: SR2-PB4-400R3XP			SCALE 1:7
			REV -