
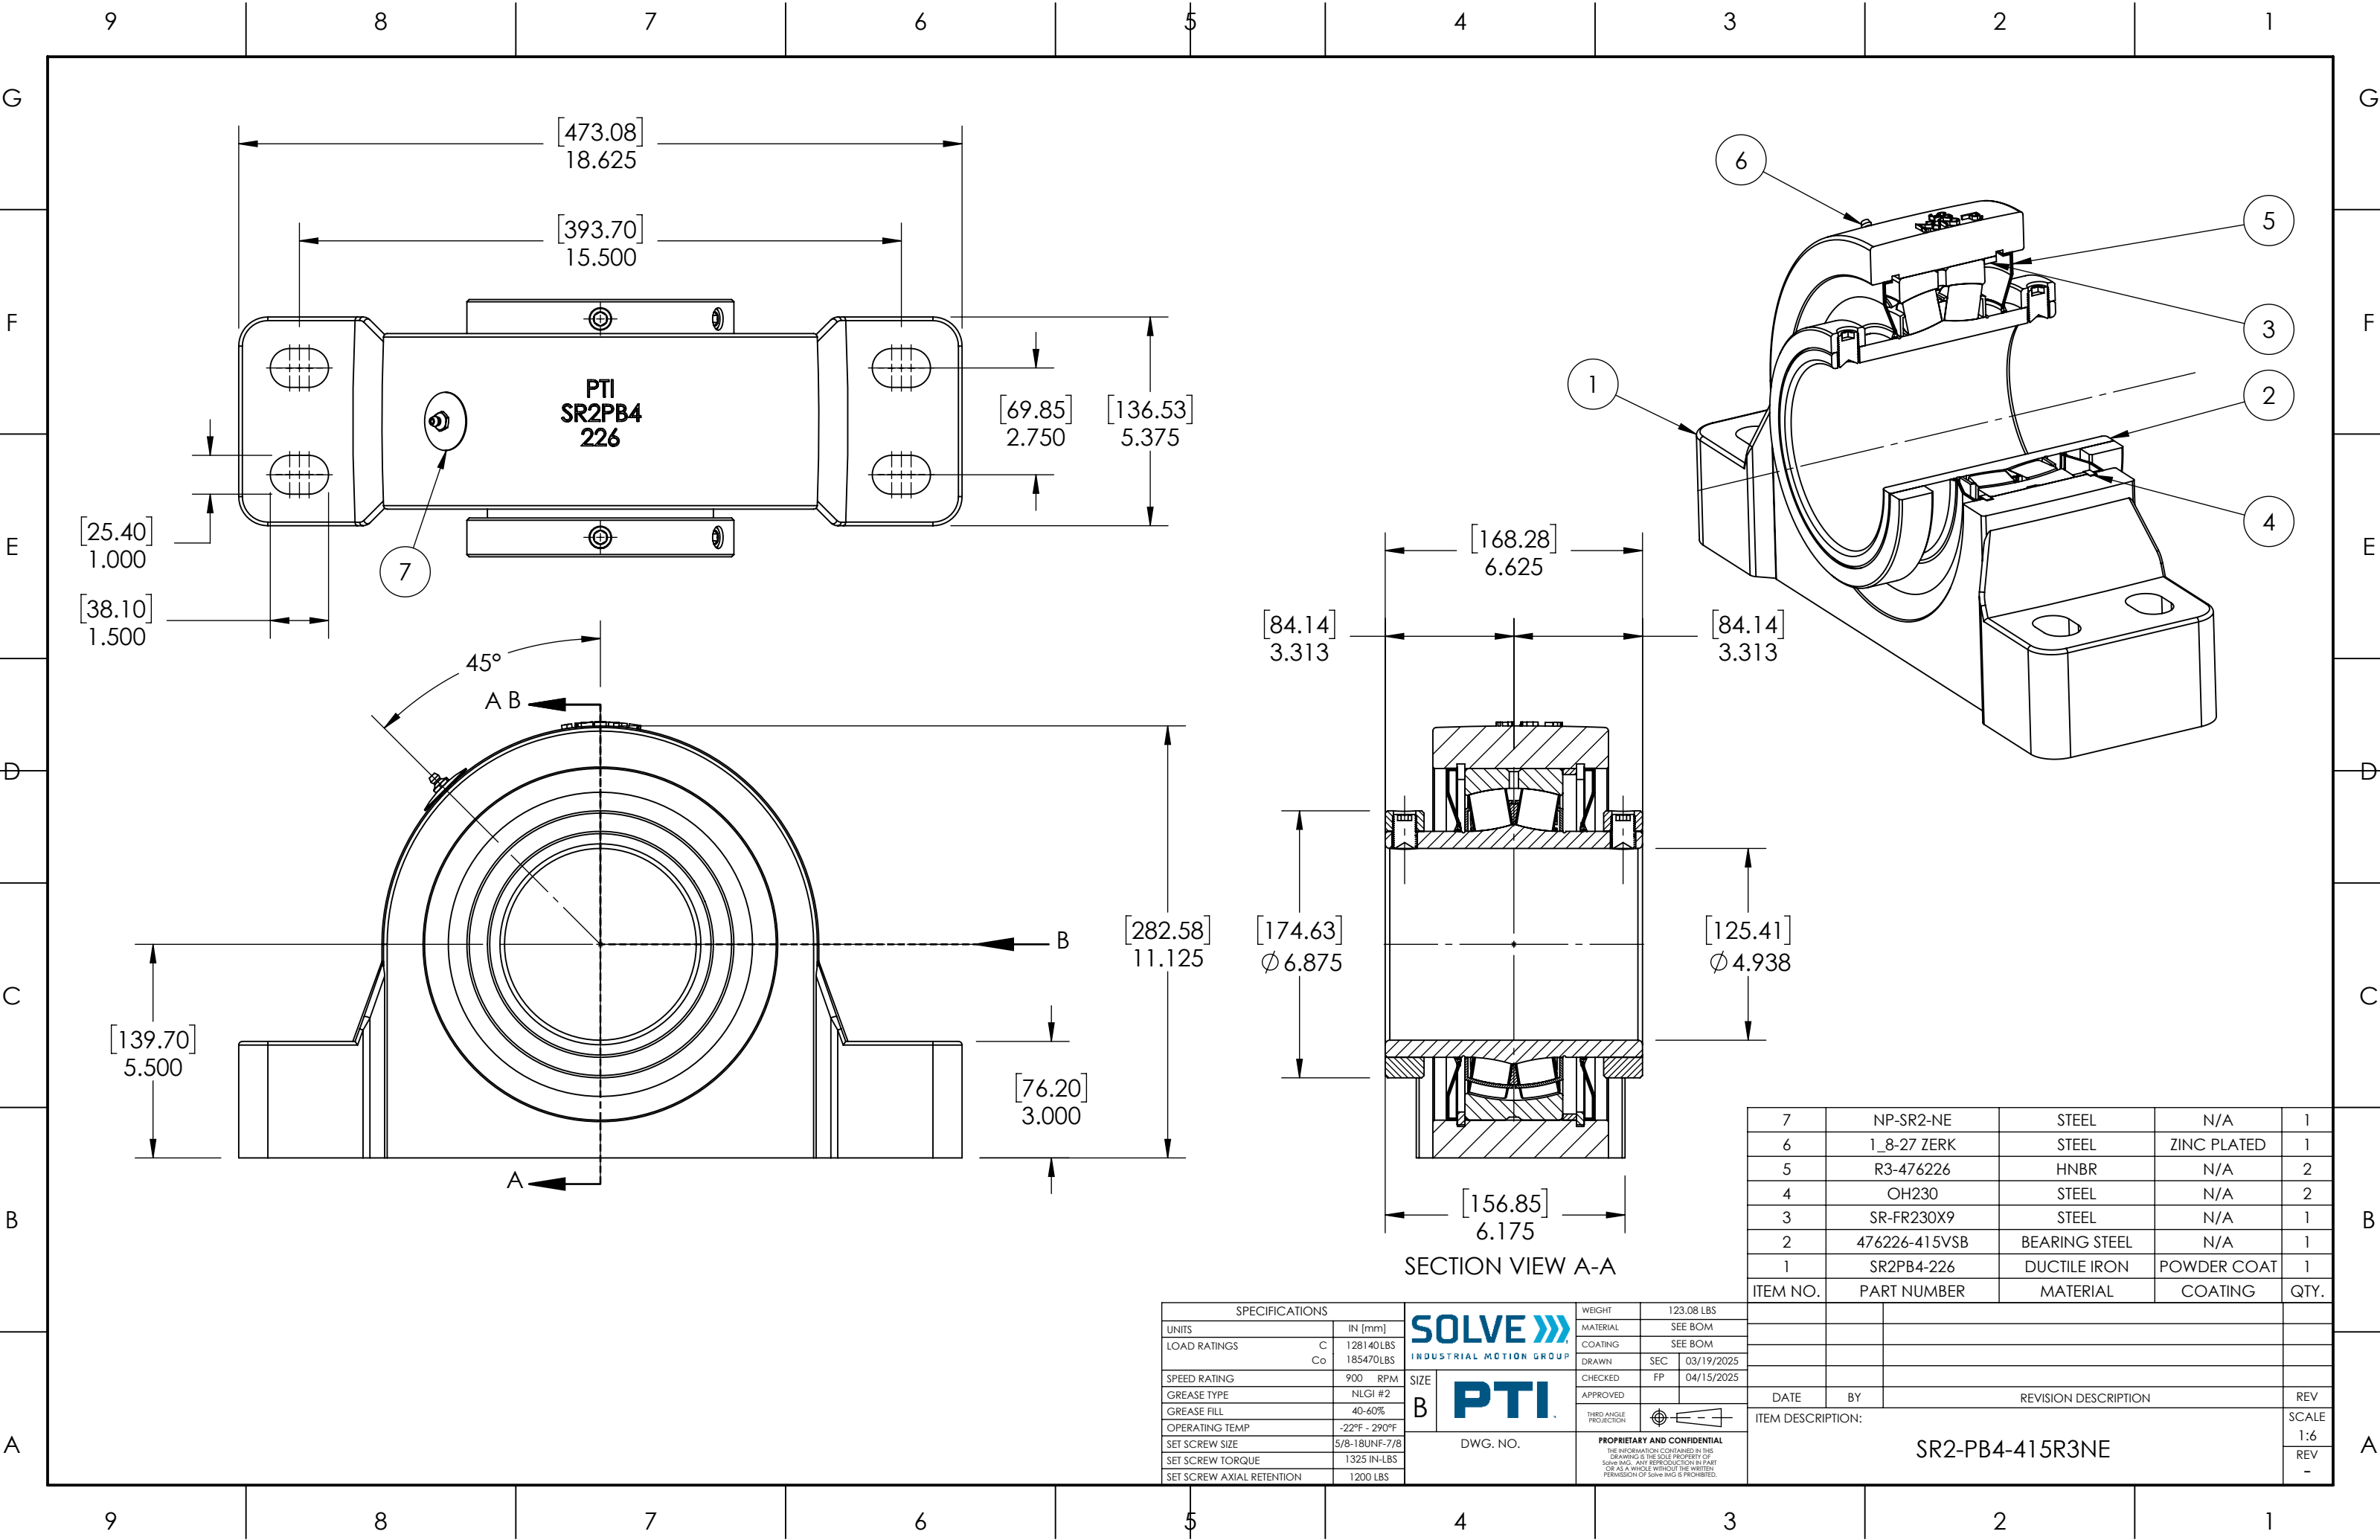




SPECIFICATIONS			
UNITS		IN [mm]	
LOAD RATINGS	C Co	128140LBS 185470LBS	
SPEED RATING		900 RPM	
GREASE TYPE		NLGI #2	
GREASE FILL		40-60%	
OPERATING TEMP		-22°F - 290°F	
SET SCREW SIZE		5/8-18UNF-7/8	
SET SCREW TORQUE		1325 IN-LBS	
SET SCREW AXIAL RETENTION		1200 LBS	

SOLVE 		WEIGHT	123.08 LBS
INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
		COATING	SEE BOM
		DRAWN	SEC 03/19/2025
		CHECKED	FP 04/15/2025
		APPROVED	
		THIRD ANGLE PROJECTION	

SIZE	B	DWG. NO.	PROPRIETARY AND CONFIDENTIAL
		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.	

7	NP-SR2-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476226	HNBR	N/A	2
4	OH230	STEEL	N/A	2
3	SR-FR230X9	STEEL	N/A	1
2	476226-415VSB	BEARING STEEL	N/A	1
1	SR2PB4-226	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION:		SR2-PB4-415R3NE		SCALE
				1:6
				REV
				-