
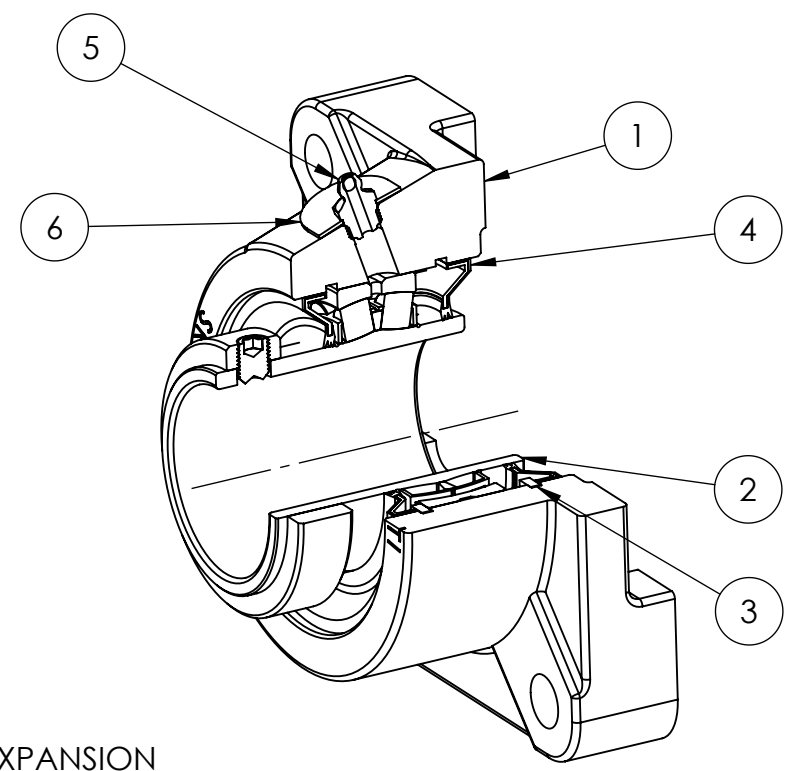
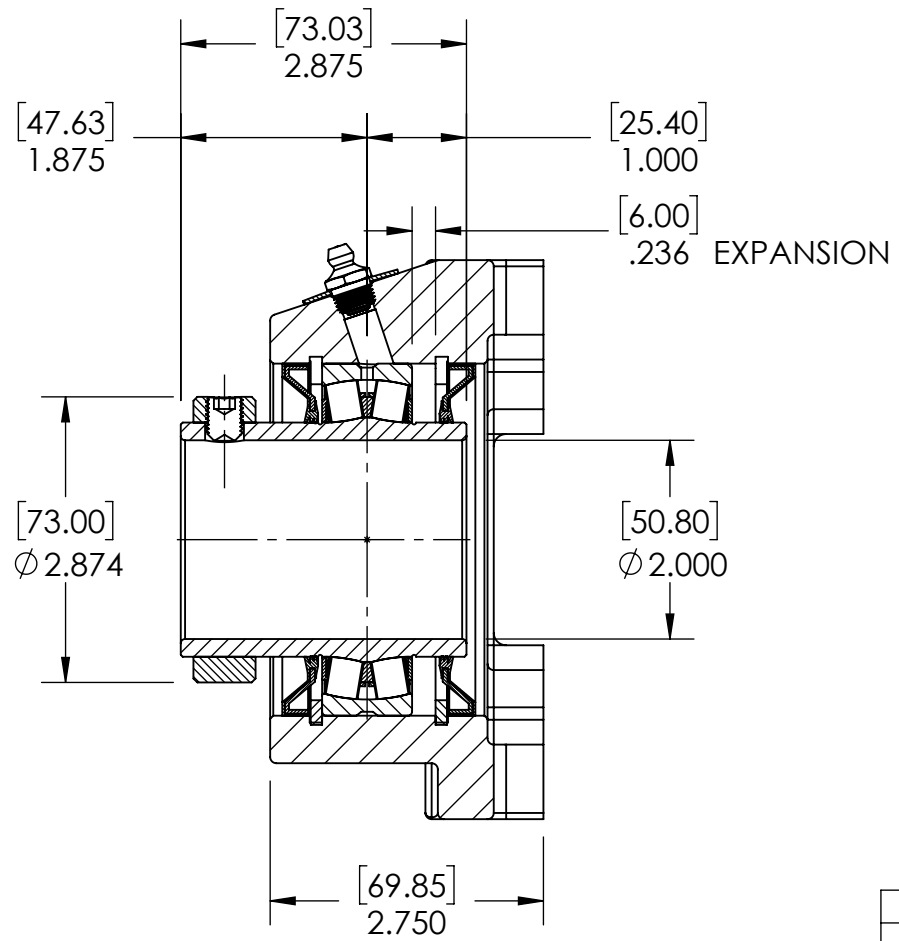
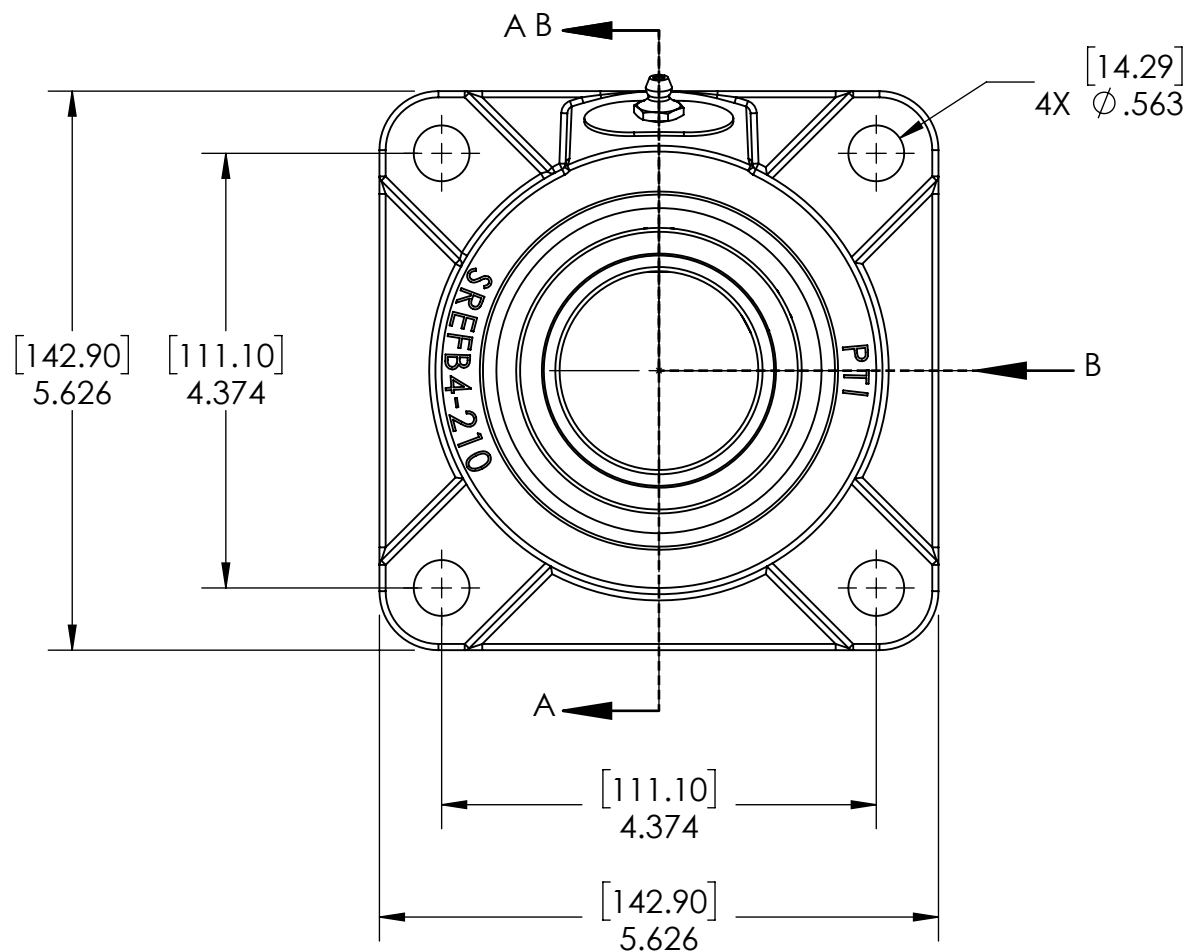
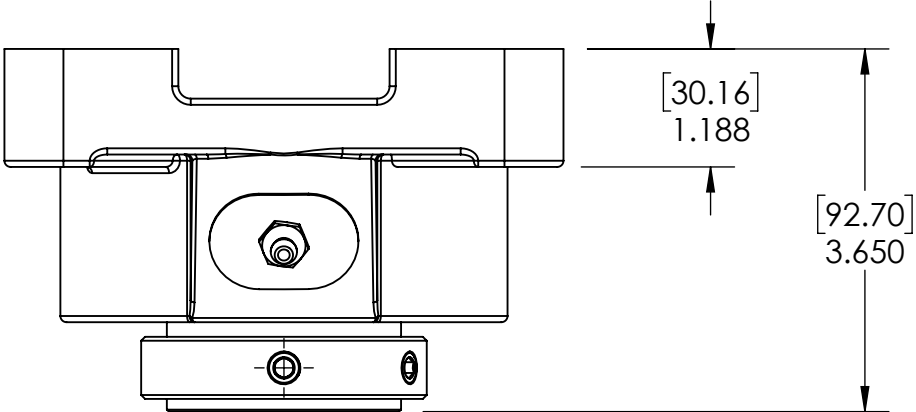


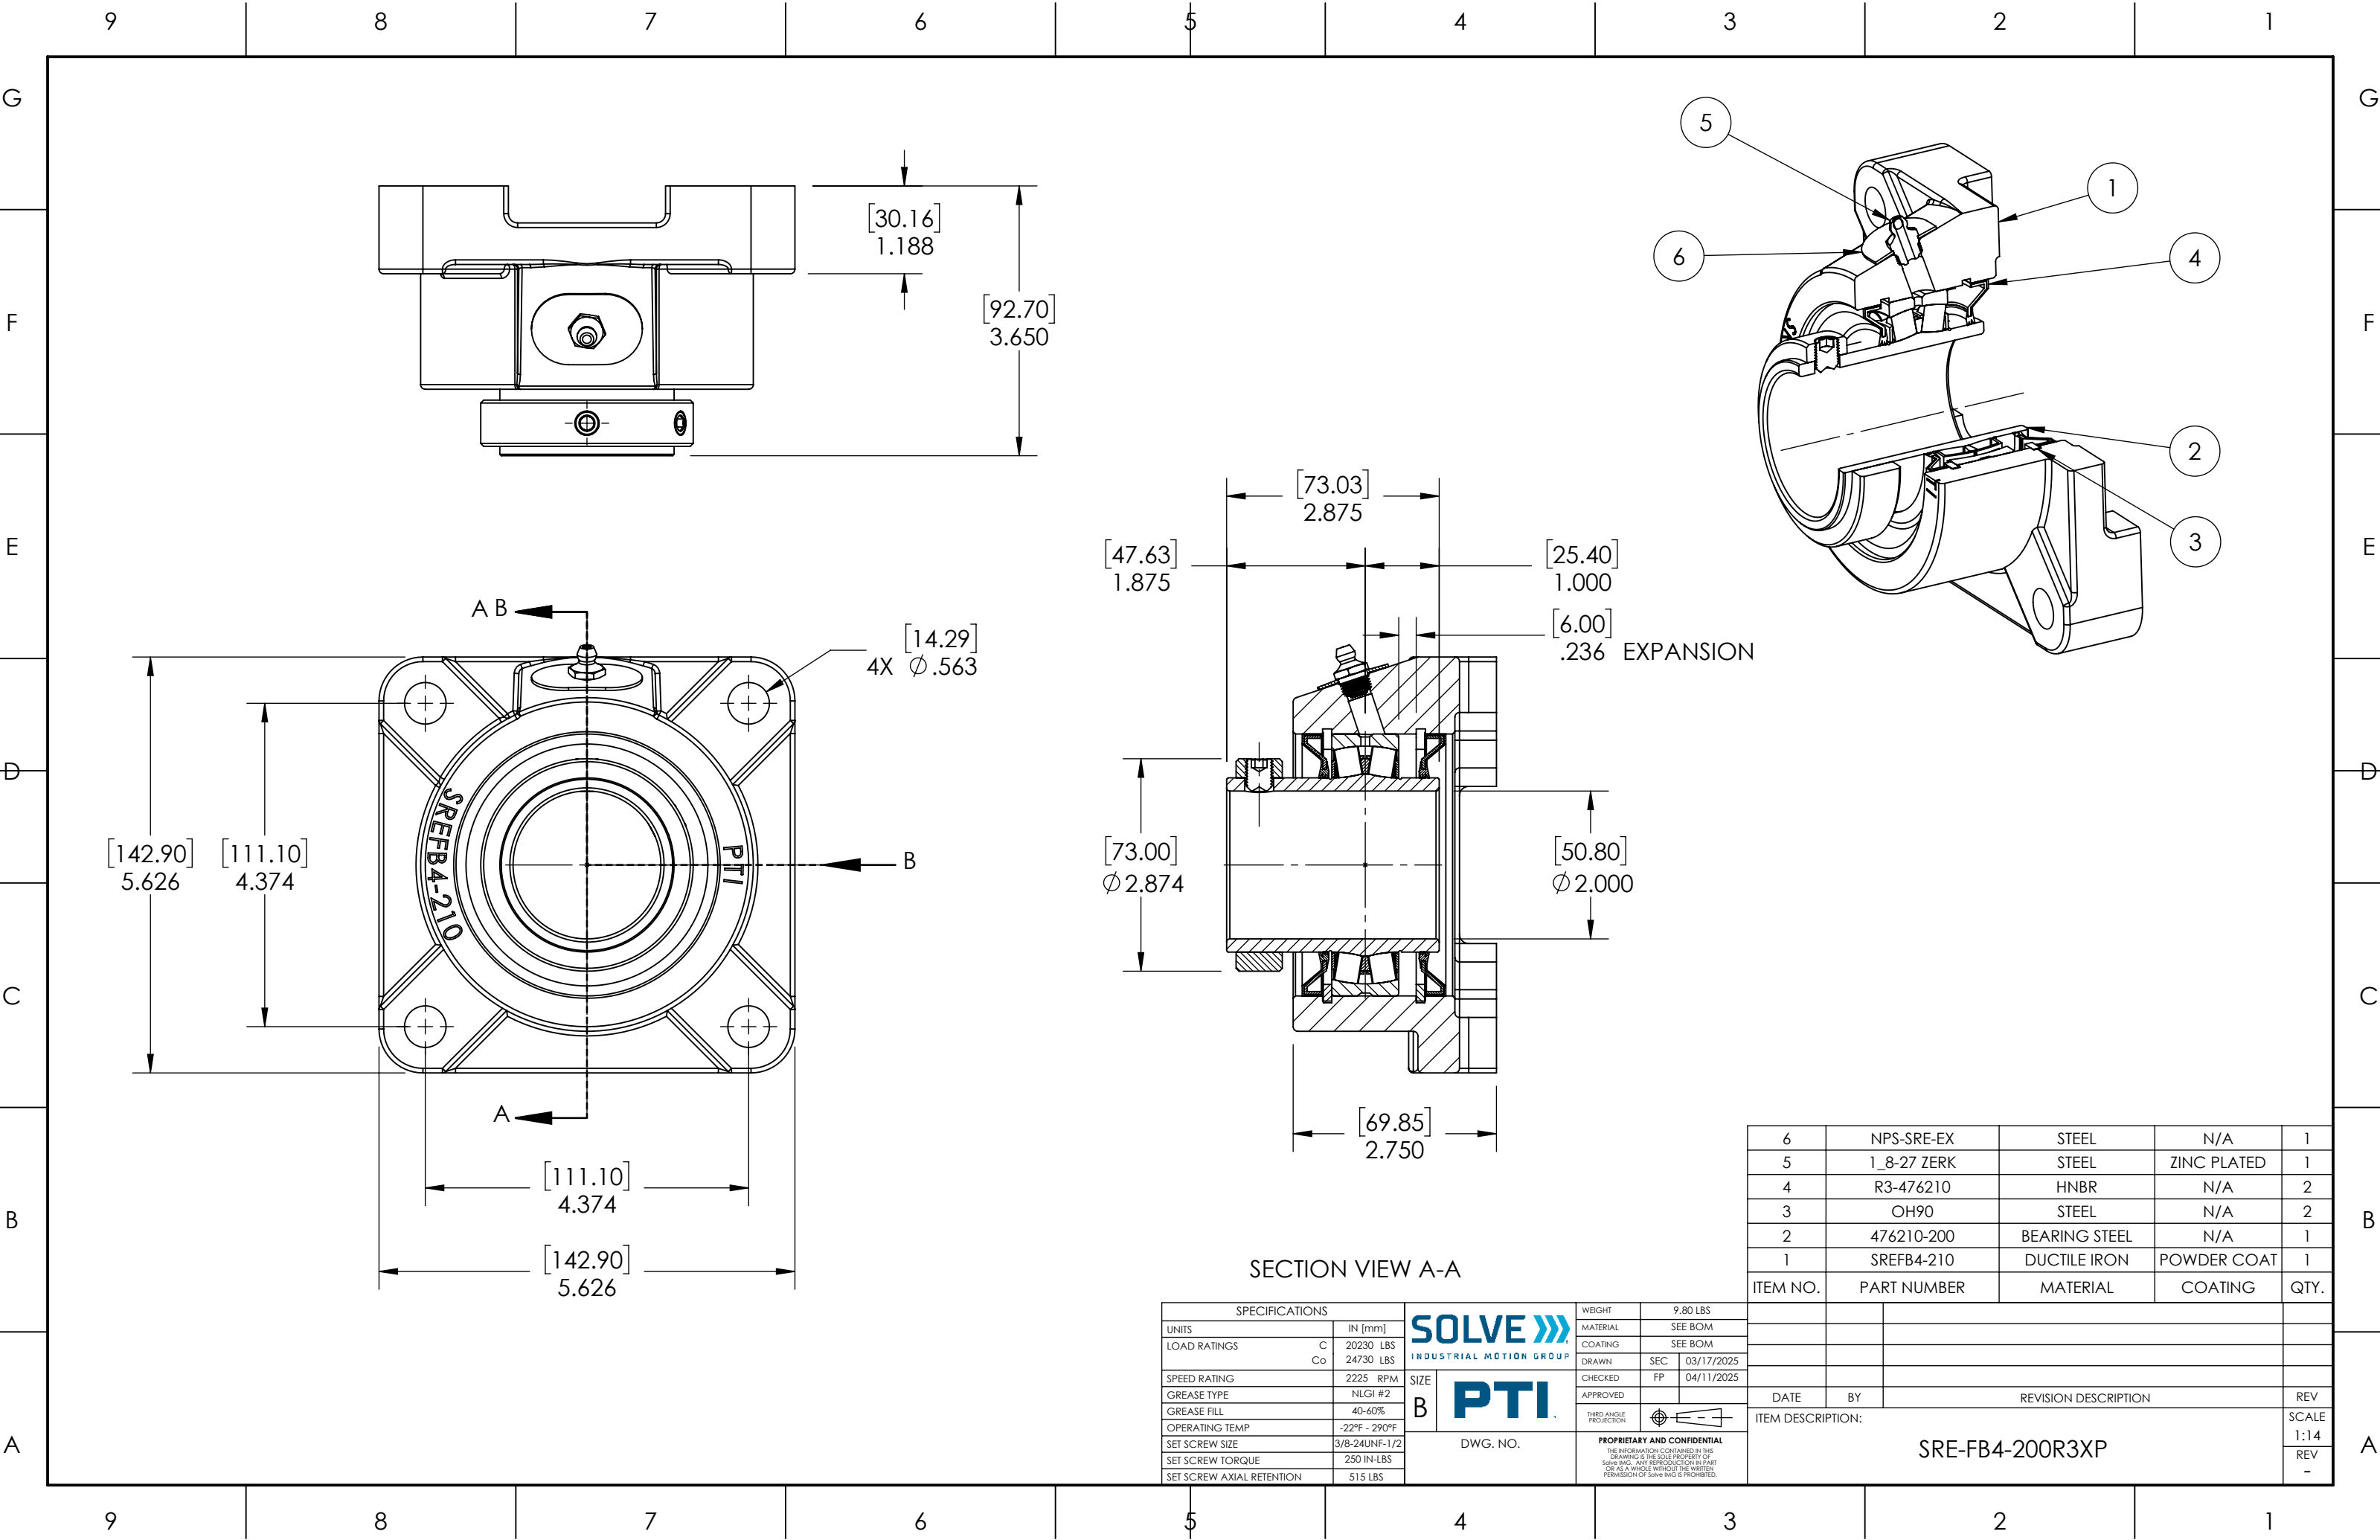

SECTION VIEW A-A

SPECIFICATIONS			SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT		9.80 LBS		
UNITS		IN [mm]			MATERIAL		SEE BOM		
LOAD RATINGS		C Co		20230 LBS 24730 LBS		COATING		SEE BOM	
SPEED RATING				2225 RPM		DRAWN		SEC 03/17/2025	
GREASE TYPE				NLGI #2		CHECKED		FP 04/11/2025	
GREASE FILL				40-60%		APPROVED			
OPERATING TEMP				-22°F - 290°F		THIRD ANGLE PROJECTION			
SET SCREW SIZE		3/8-24UNF-1/2		DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
SET SCREW TORQUE		250 IN-LBS							
SET SCREW AXIAL RETENTION		515 LBS							

6	NPS-SRE-EX	STEEL	N/A	1
5	1.8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476210	HNBR	N/A	2
3	OH90	STEEL	N/A	2
2	476210-200	BEARING STEEL	N/A	1
1	SREFB4-210	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION:		SRE-FB4-200R3XP		SCALE
				1:14
				REV
				-