
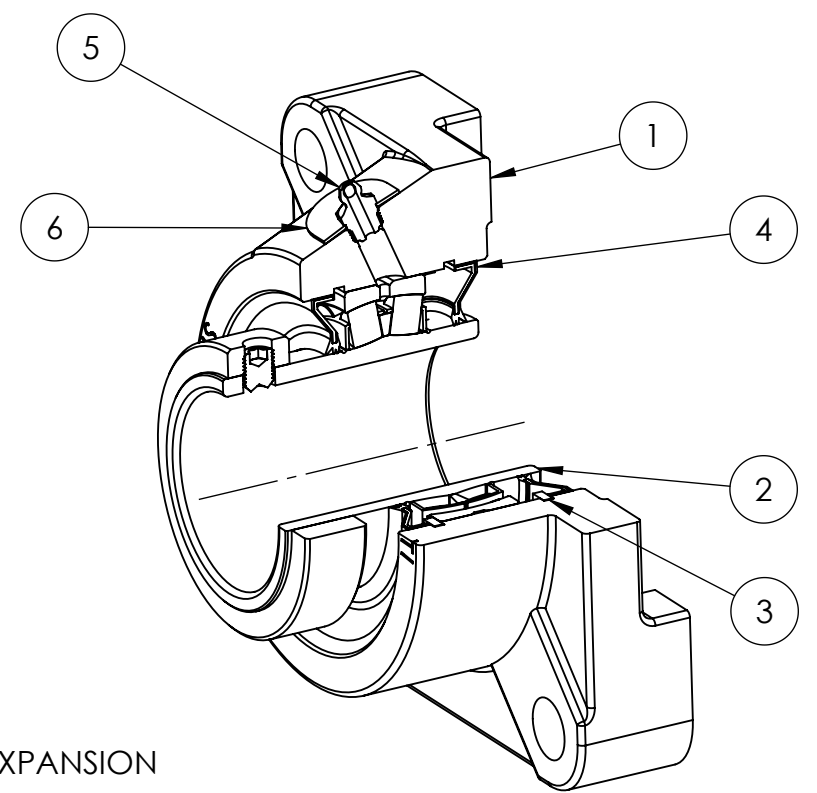
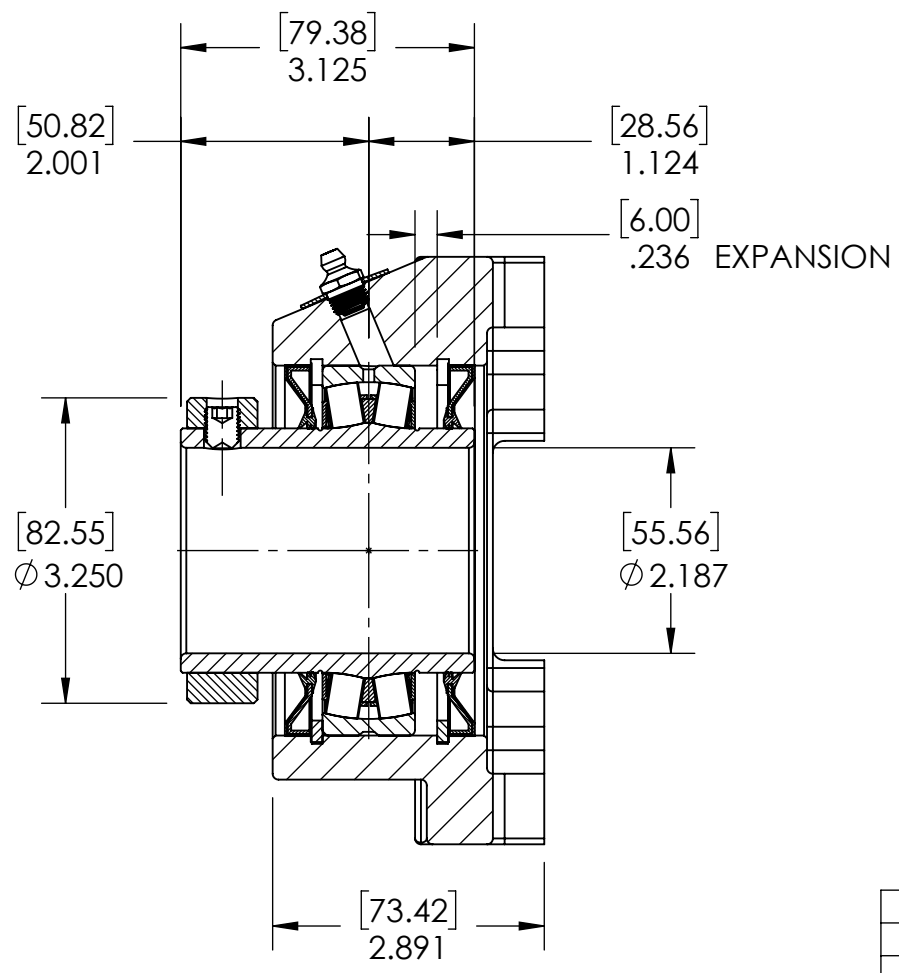
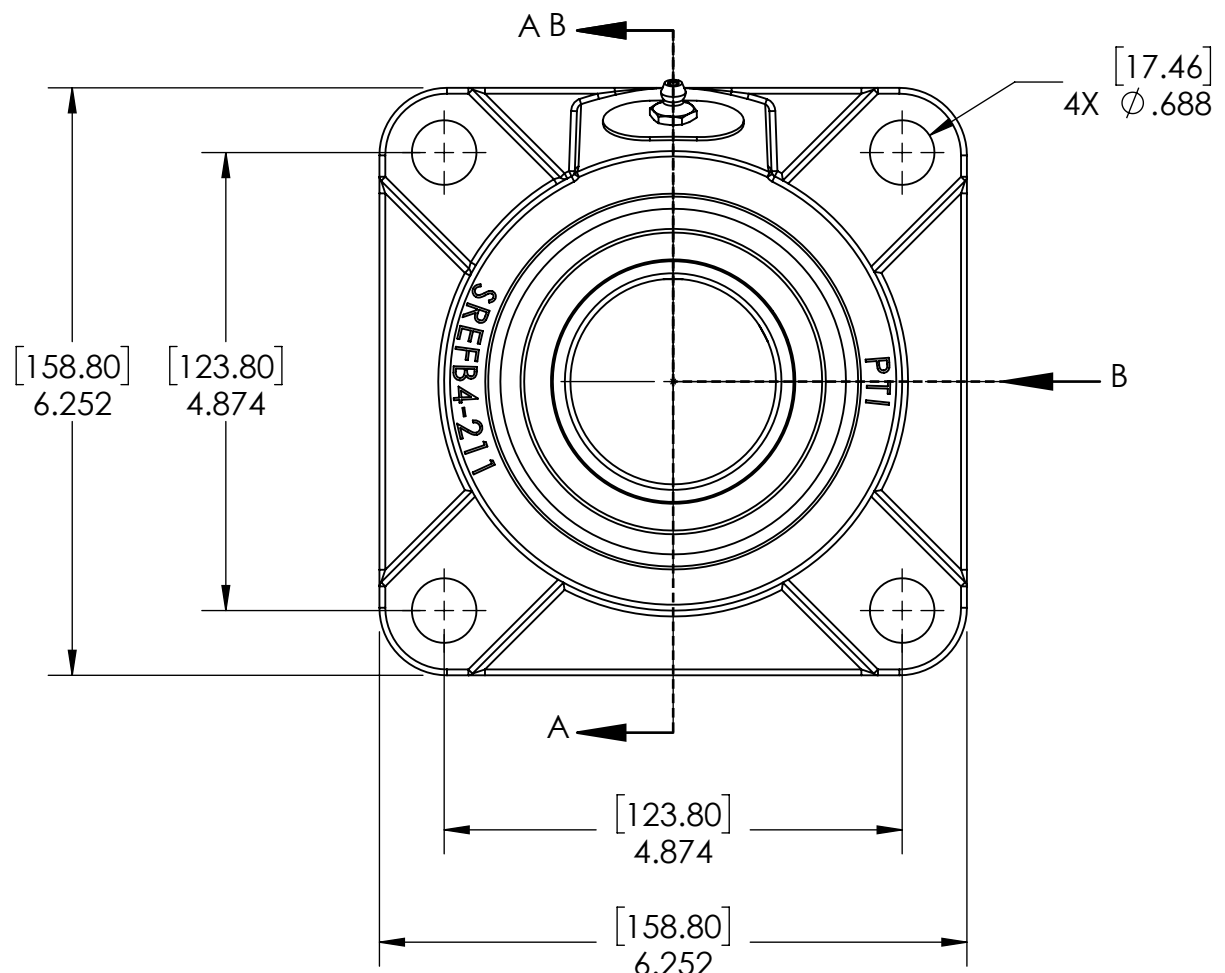
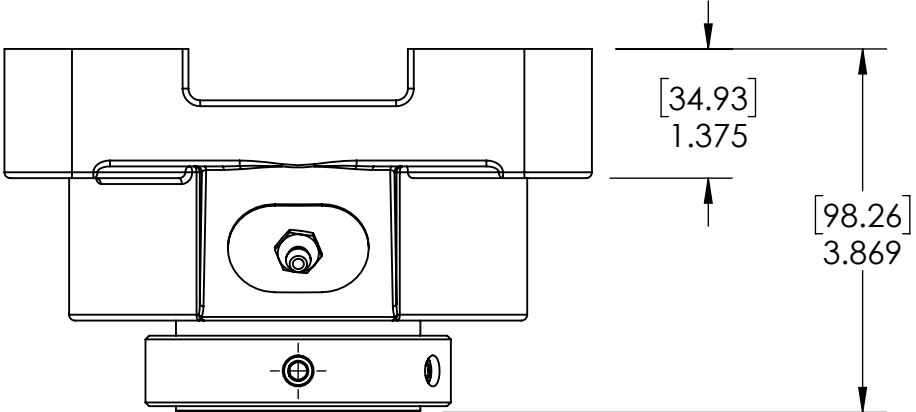
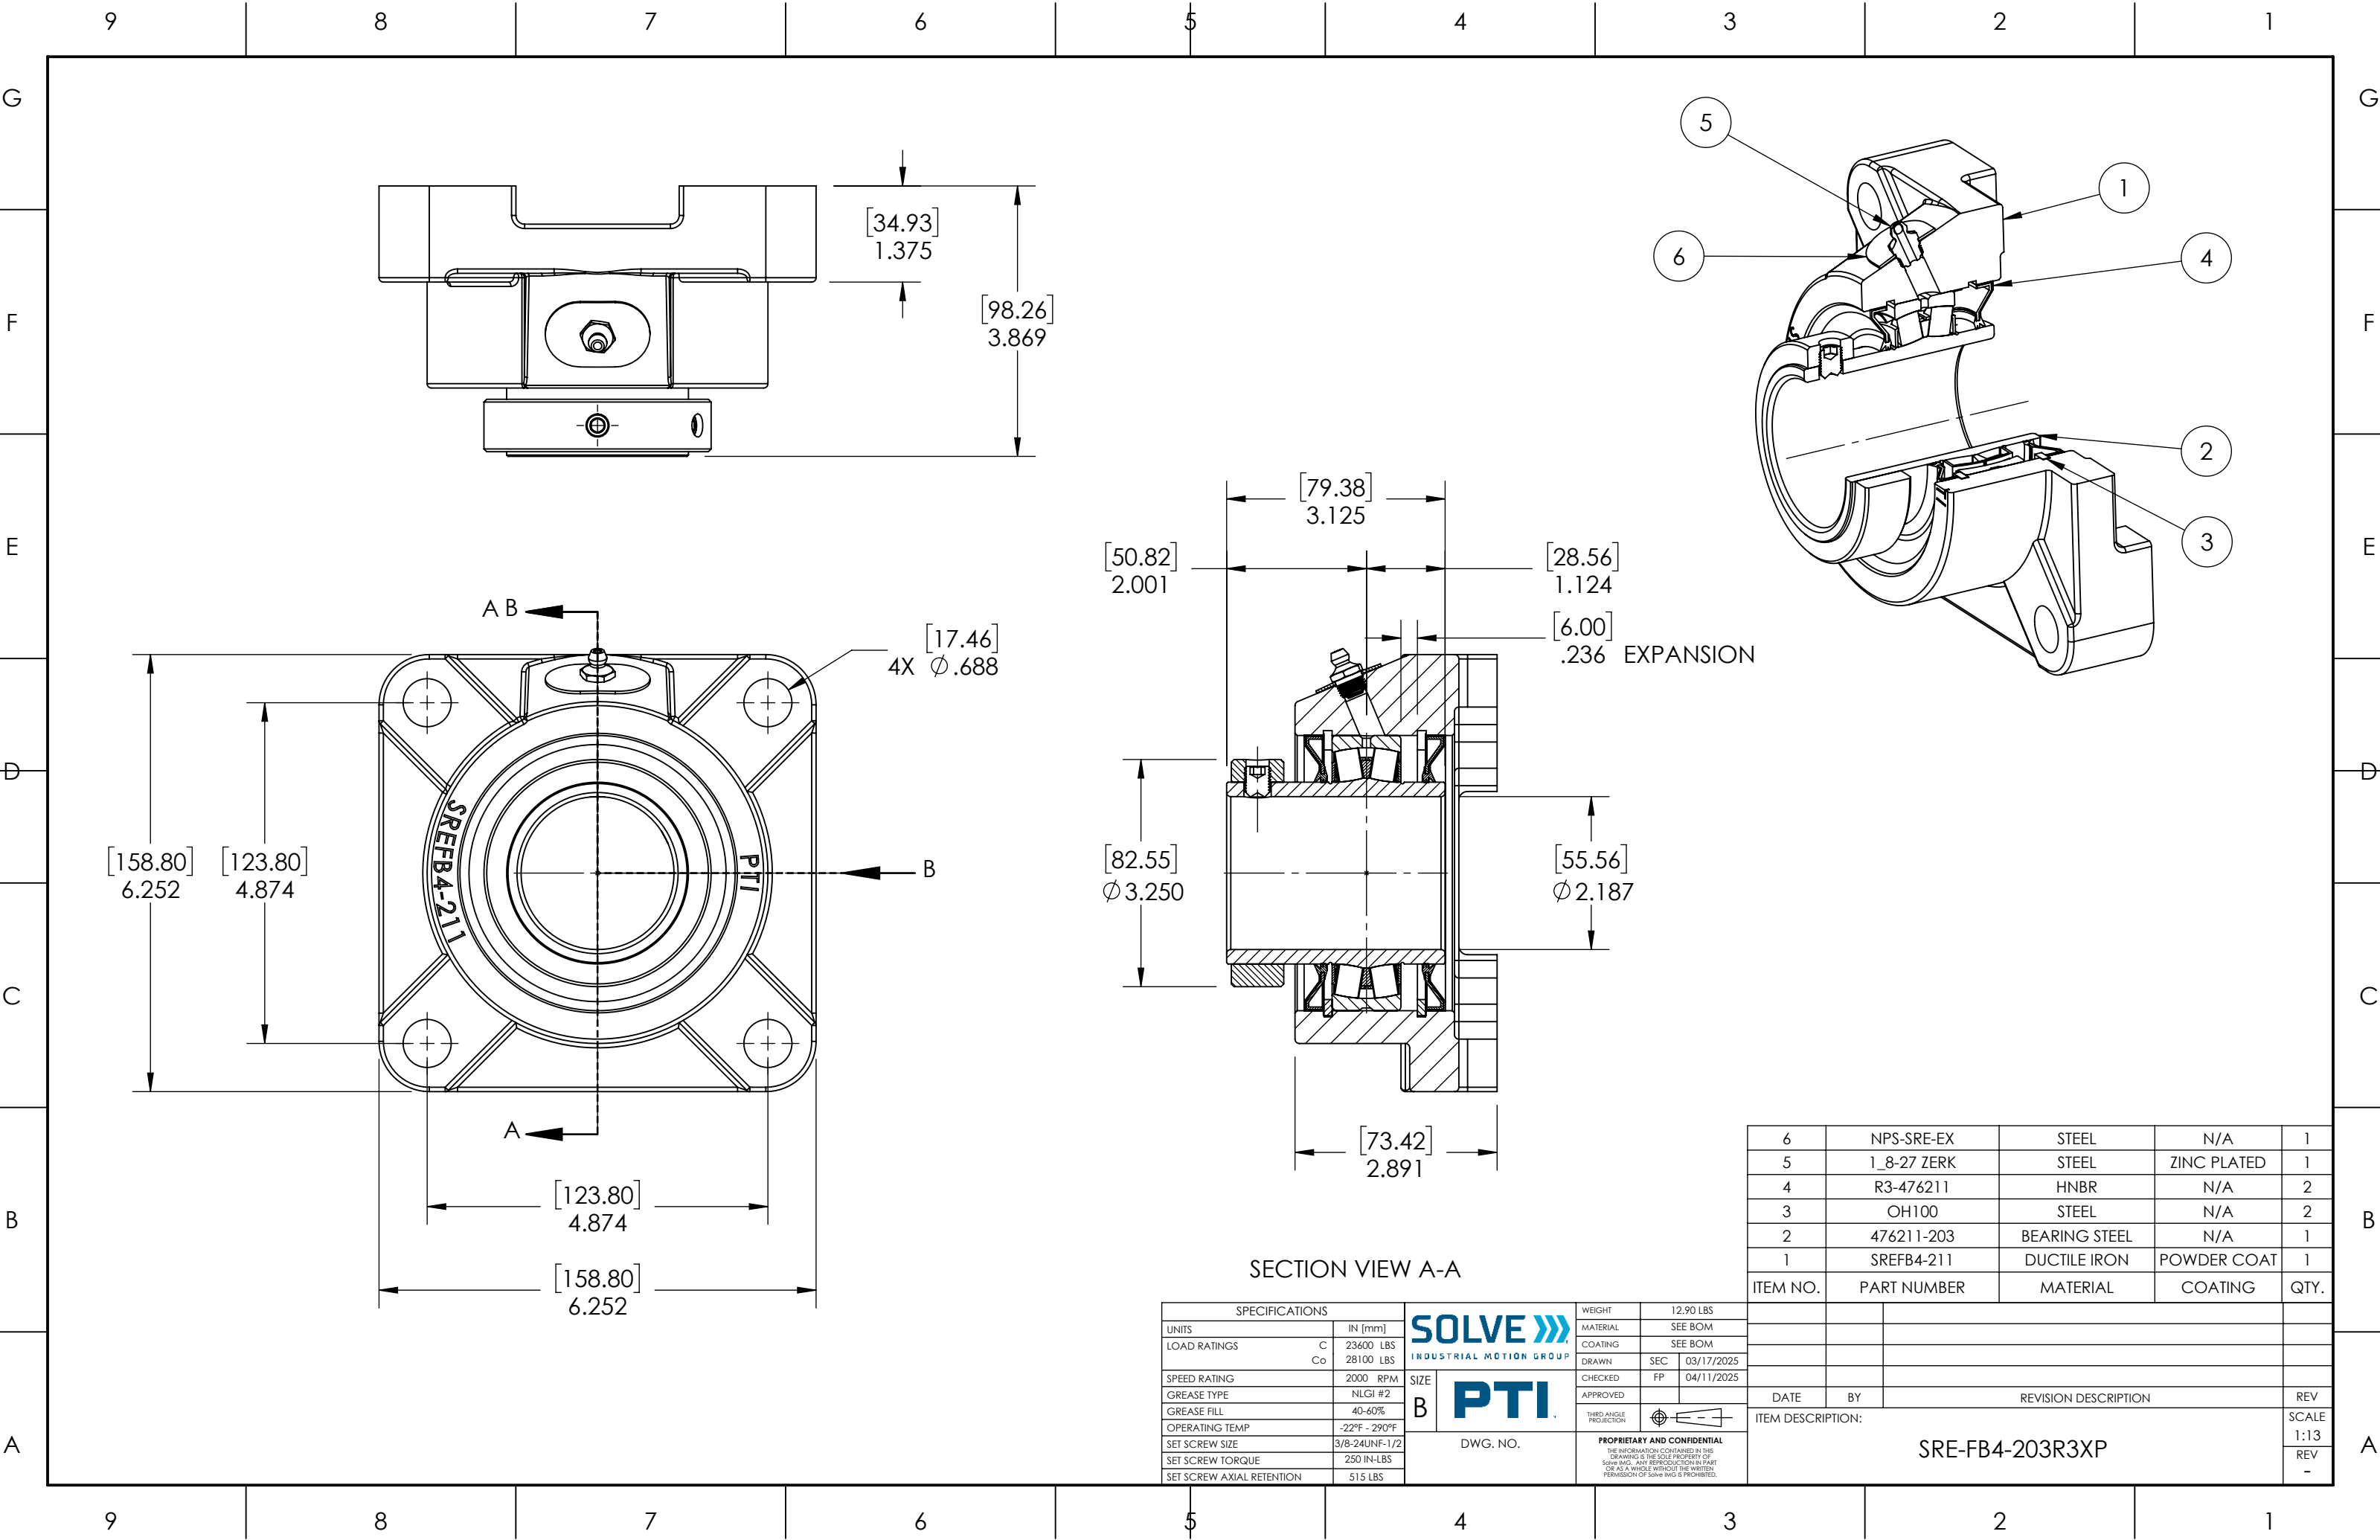





SECTION VIEW A-A

SPECIFICATIONS		SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT		12.90 LBS	
UNITS	IN [mm]			MATERIAL		SEE BOM	
LOAD RATINGS	C 23600 LBS Co 28100 LBS	SIZE B 		COATING		SEE BOM	
SPEED RATING	2000 RPM			DRAWN		SEC	03/17/2025
GREASE TYPE	NLGI #2	DWG. NO.		CHECKED		FP	04/11/2025
GREASE FILL	40-60%			APPROVED			
OPERATING TEMP	-22°F - 290°F	DWG. NO.		THIRD ANGLE PROJECTION 			
SET SCREW SIZE	3/8-24UNF-1/2						
SET SCREW TORQUE	250 IN-LBS						
SET SCREW AXIAL RETENTION	515 LBS	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.					

6	NPS-SRE-EX	STEEL	N/A	1
5	1.8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476211	HNBR	N/A	2
3	OH100	STEEL	N/A	2
2	476211-203	BEARING STEEL	N/A	1
1	SREFB4-211	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-FB4-203R3XP			1:13
			REV
			-