
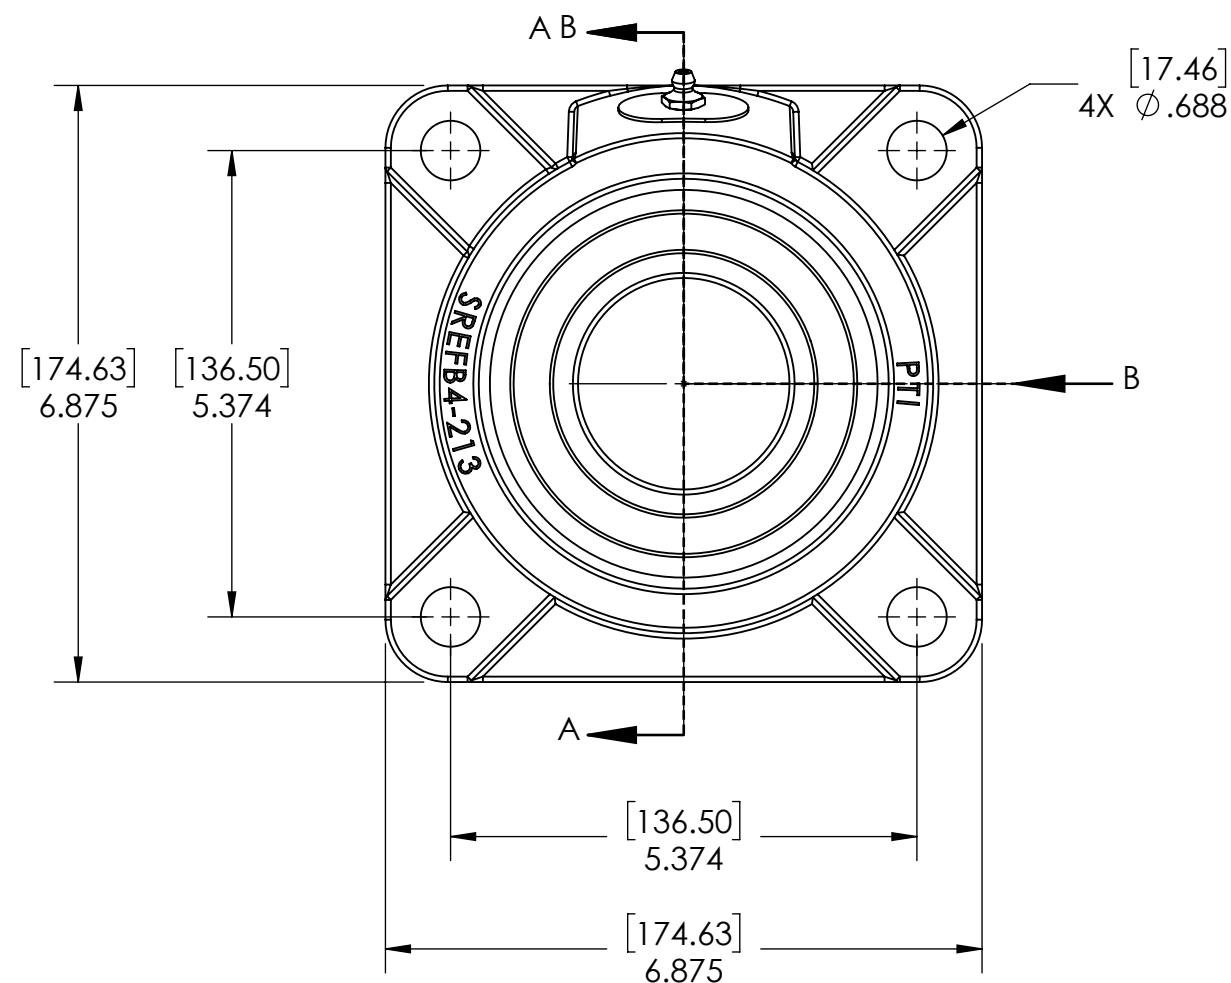
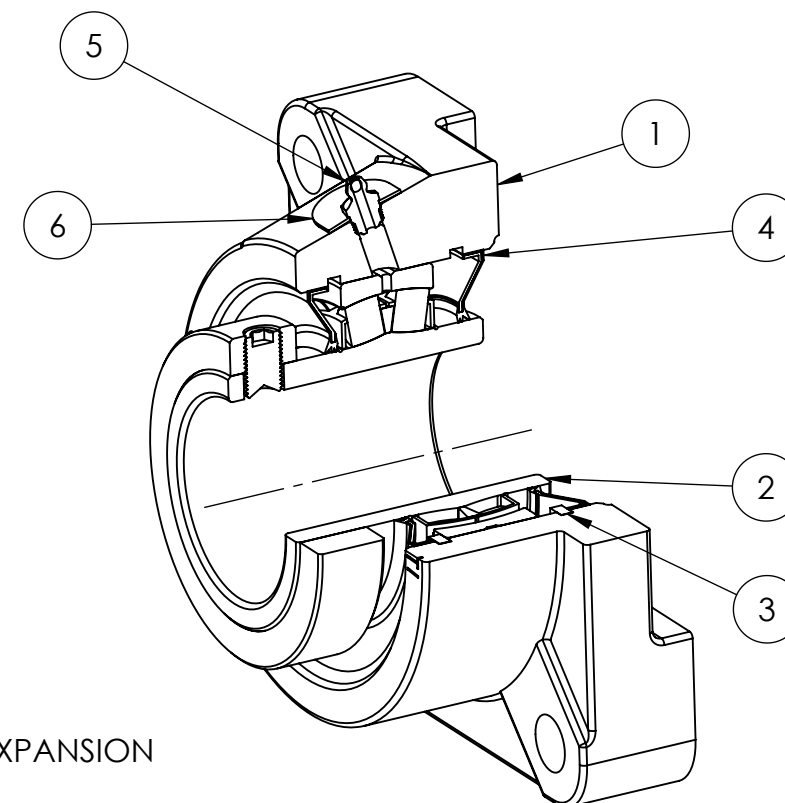




SECTION VIEW A-A

SPECIFICATIONS			WEIGHT	19.29 LBS
UNITS	IN [mm]		MATERIAL	SEE BOM
LOAD RATINGS	C 37090 LBS Co 46090 LBS	SIZE B 	COATING	SEE BOM
SPEED RATING	1700 RPM		DRAWN	SEC 03/17/20
GREASE TYPE	NLGI #2		CHECKED	FP 04/11/20
GREASE FILL	40-60%		APPROVED	
OPERATING TEMP	-22°F - 290°F		THIRD ANGLE PROJECTION	
SET SCREW SIZE	1/2-20UNF-3/4	DWG. NO.	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS			
SET SCREW AXIAL RETENTION	900 LBS			

6	NPS-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476213	HNBR	N/A	2
3	OH120	STEEL	N/A	2
2	476213-207	BEARING STEEL	N/A	1
1	SREFB4-213	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY

25				
25				
	DATE	BY	REVISION DESCRIPTION	RE
-	ITEM DESCRIPTION:			SCA
	SRE-FB4-207R3XP			1:1
				RE