
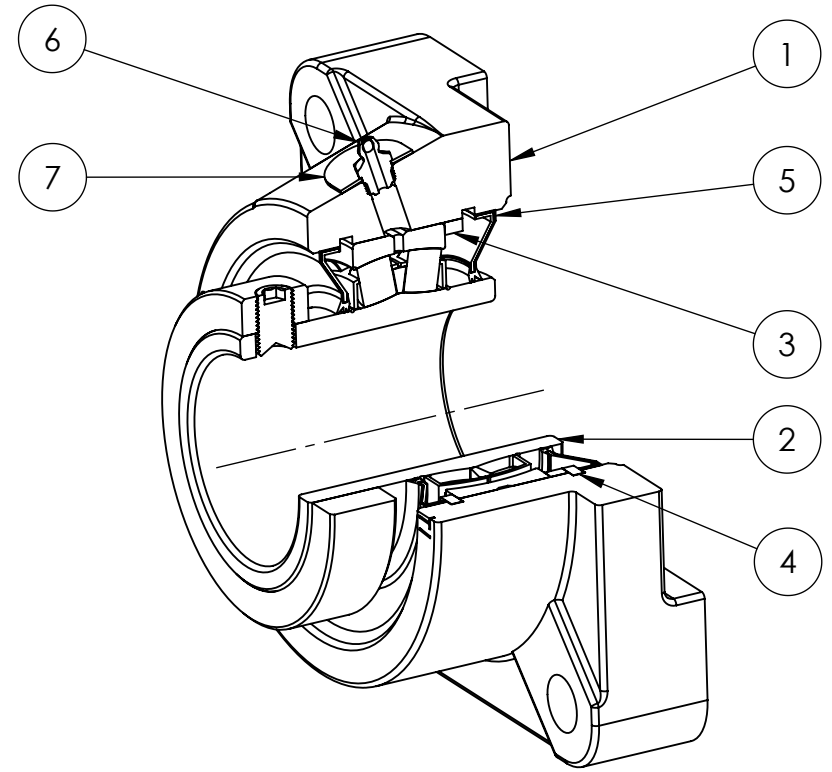
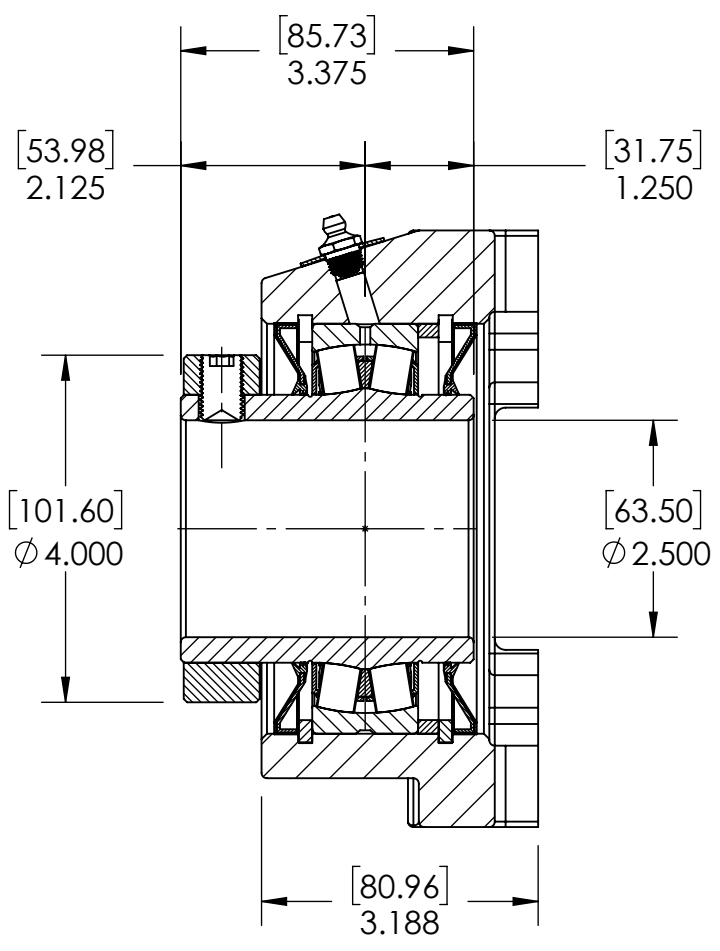
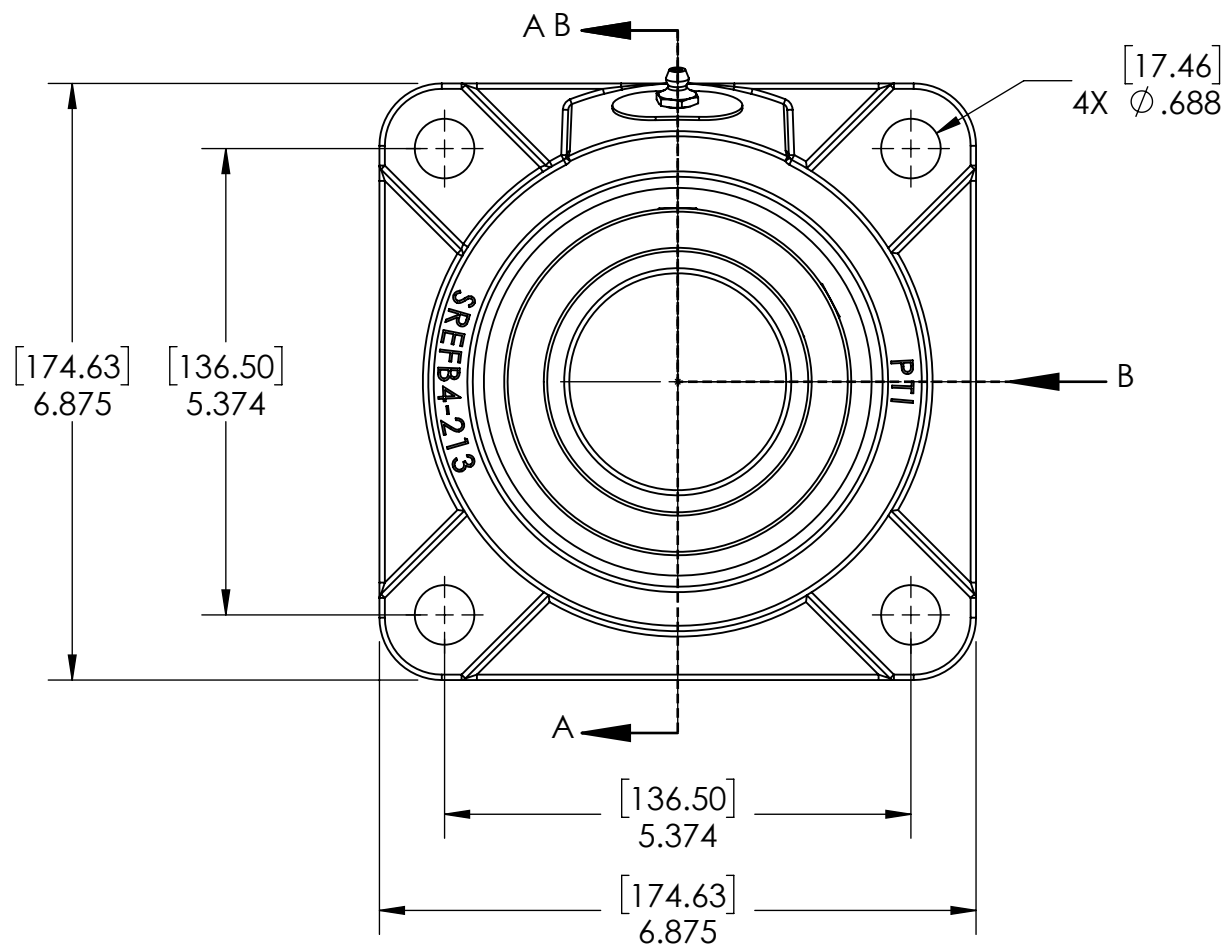
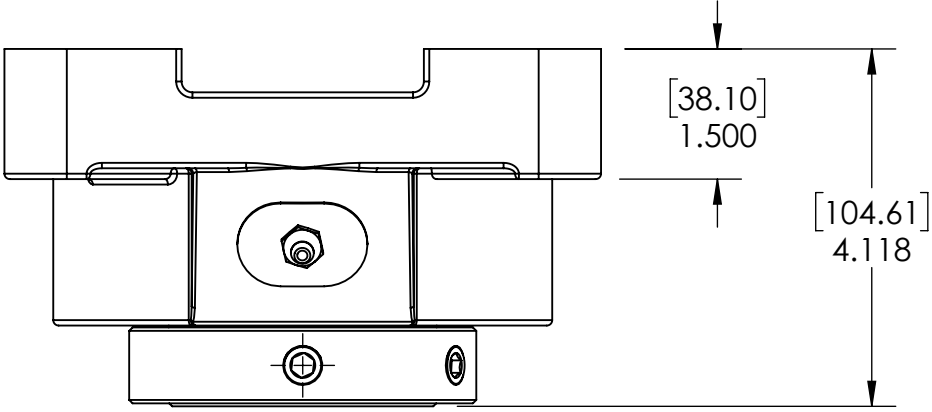


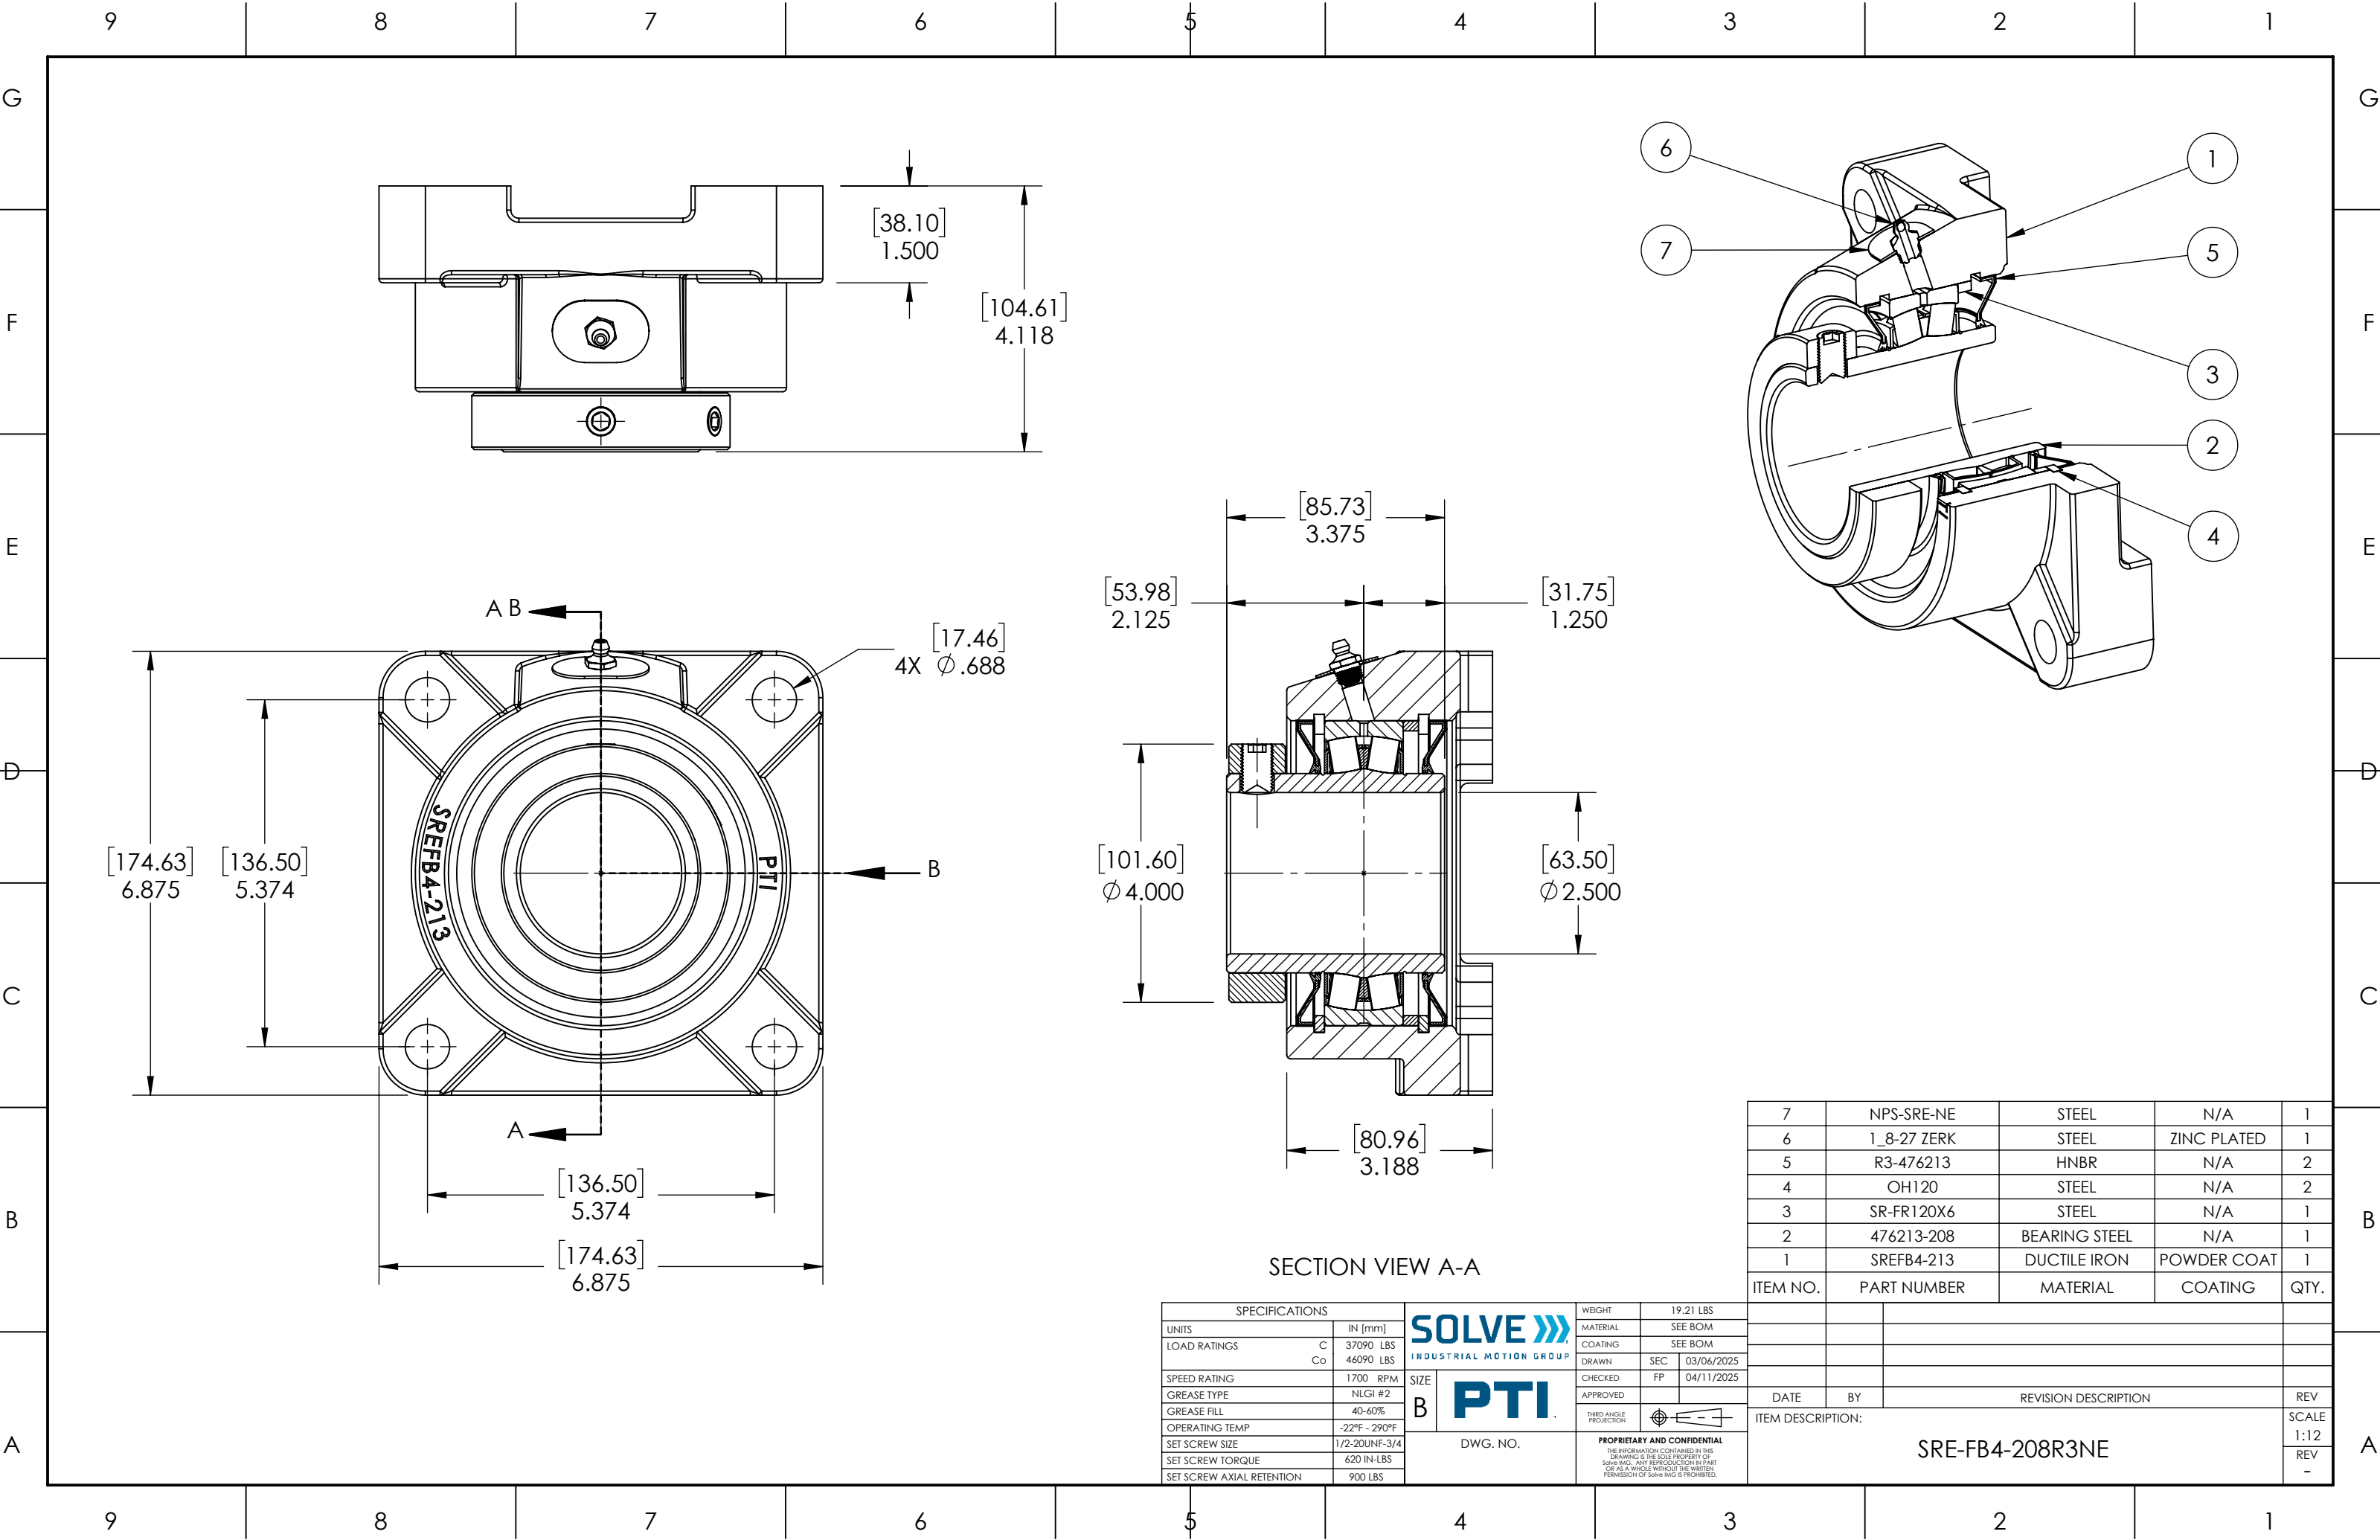

SECTION VIEW A-A

7	NPS-SRE-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476213	HNBR	N/A	2
4	OH120	STEEL	N/A	2
3	SR-FR120X6	STEEL	N/A	1
2	476213-208	BEARING STEEL	N/A	1
1	SREFB4-213	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
5				
5				
DATE	BY	REVISION DESCRIPTION		REV
ITEM DESCRIPTION:				SCALE
SRE-FB4-208R3NE				1:12
				REV
				-

SPECIFICATIONS		SOLVE INDUSTRIAL MOTION GROUP		WEIGHT	19.21 LBS
UNITS	IN [mm]			MATERIAL	SEE BOM
LOAD RATINGS	C 37090 LBS Co 46090 LBS	SIZE B PTI DWG. NO.		COATING	SEE BOM
SPEED RATING	1700 RPM			DRAWN	SEC 03/06/2025
GREASE TYPE	NLGI #2			CHECKED	FP 04/11/2025
GREASE FILL	40-60%			APPROVED	
OPERATING TEMP	-22°F - 290°F			THIRD ANGLE PROJECTION 	
SET SCREW SIZE	1/2-20UNF-3/4			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS				
SET SCREW AXIAL RETENTION	900 LBS				