
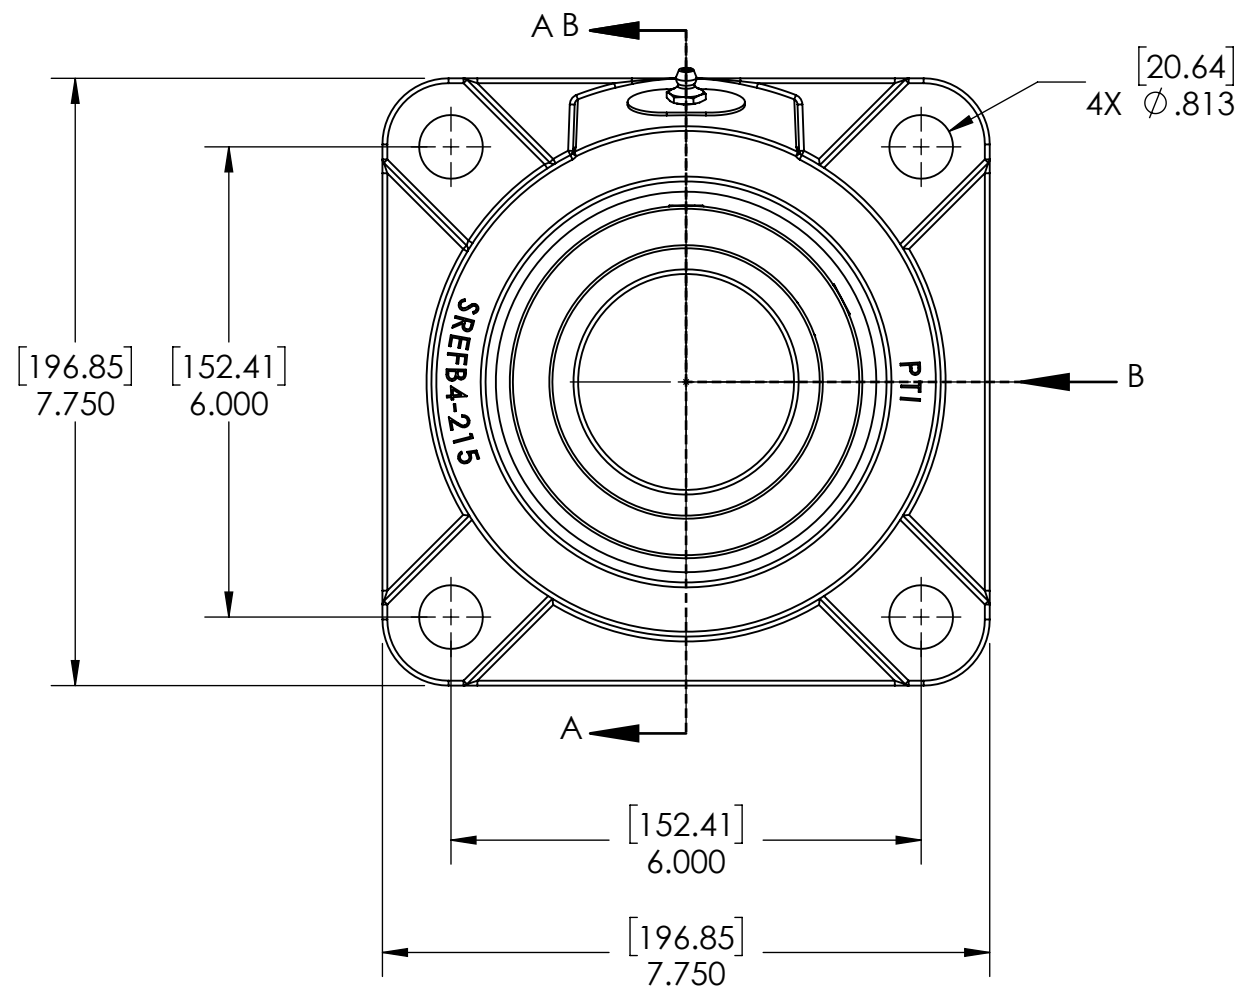


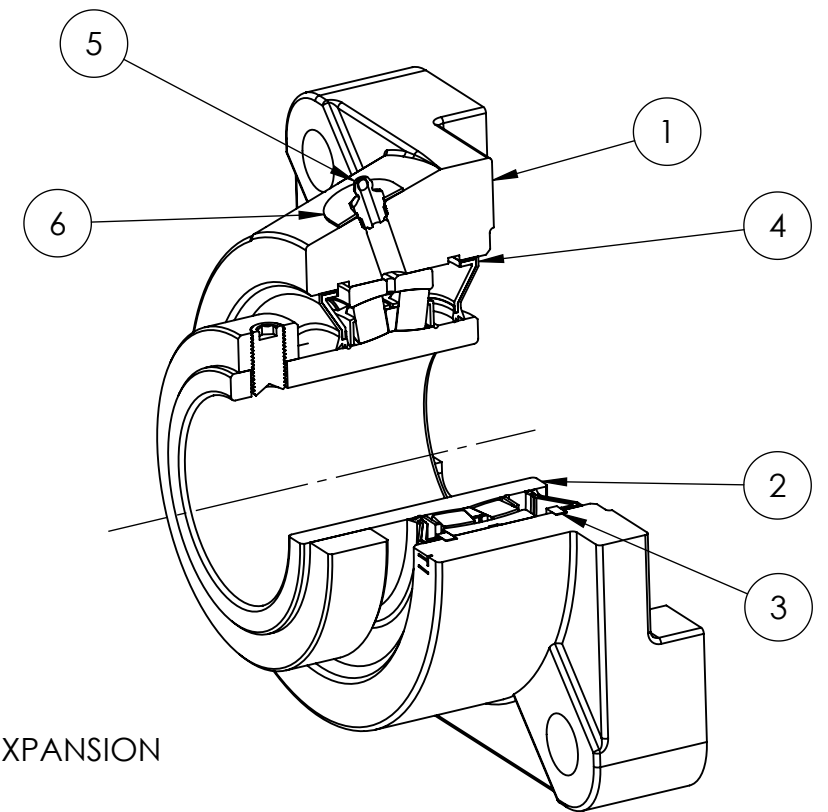

SPECIFICATIONS			WEIGHT		25.97 LBS	
UNITS	IN [mm]		MATERIAL		SEE BOM	
LOAD RATINGS	C Co	41590 LBS 52830 LBS	COATING		SEE BOM	
SPEED RATING	1500 RPM		DRAWN	SEC	03/17/2023	
GREASE TYPE	NLGI #2		CHECKED	FP	04/11/2023	
GREASE FILL	40-60%		APPROVED			
OPERATING TEMP	-22°F - 290°F		THIRD ANGLE PROJECTION			
SET SCREW SIZE	1/2-20UNF-7/8					
SET SCREW TORQUE	620 IN-LBS	DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.		
SET SCREW AXIAL RETENTION	900 LBS					

6	NPS-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-70MM	BEARING STEEL	N/A	1
1	SREFB4-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
25				
25				
	DATE	BY	REVISION DESCRIPTION	REV
-	ITEM DESCRIPTION:			SCALE
	SRE-FB4-70MMR3XP			1:10
				REV
				-