


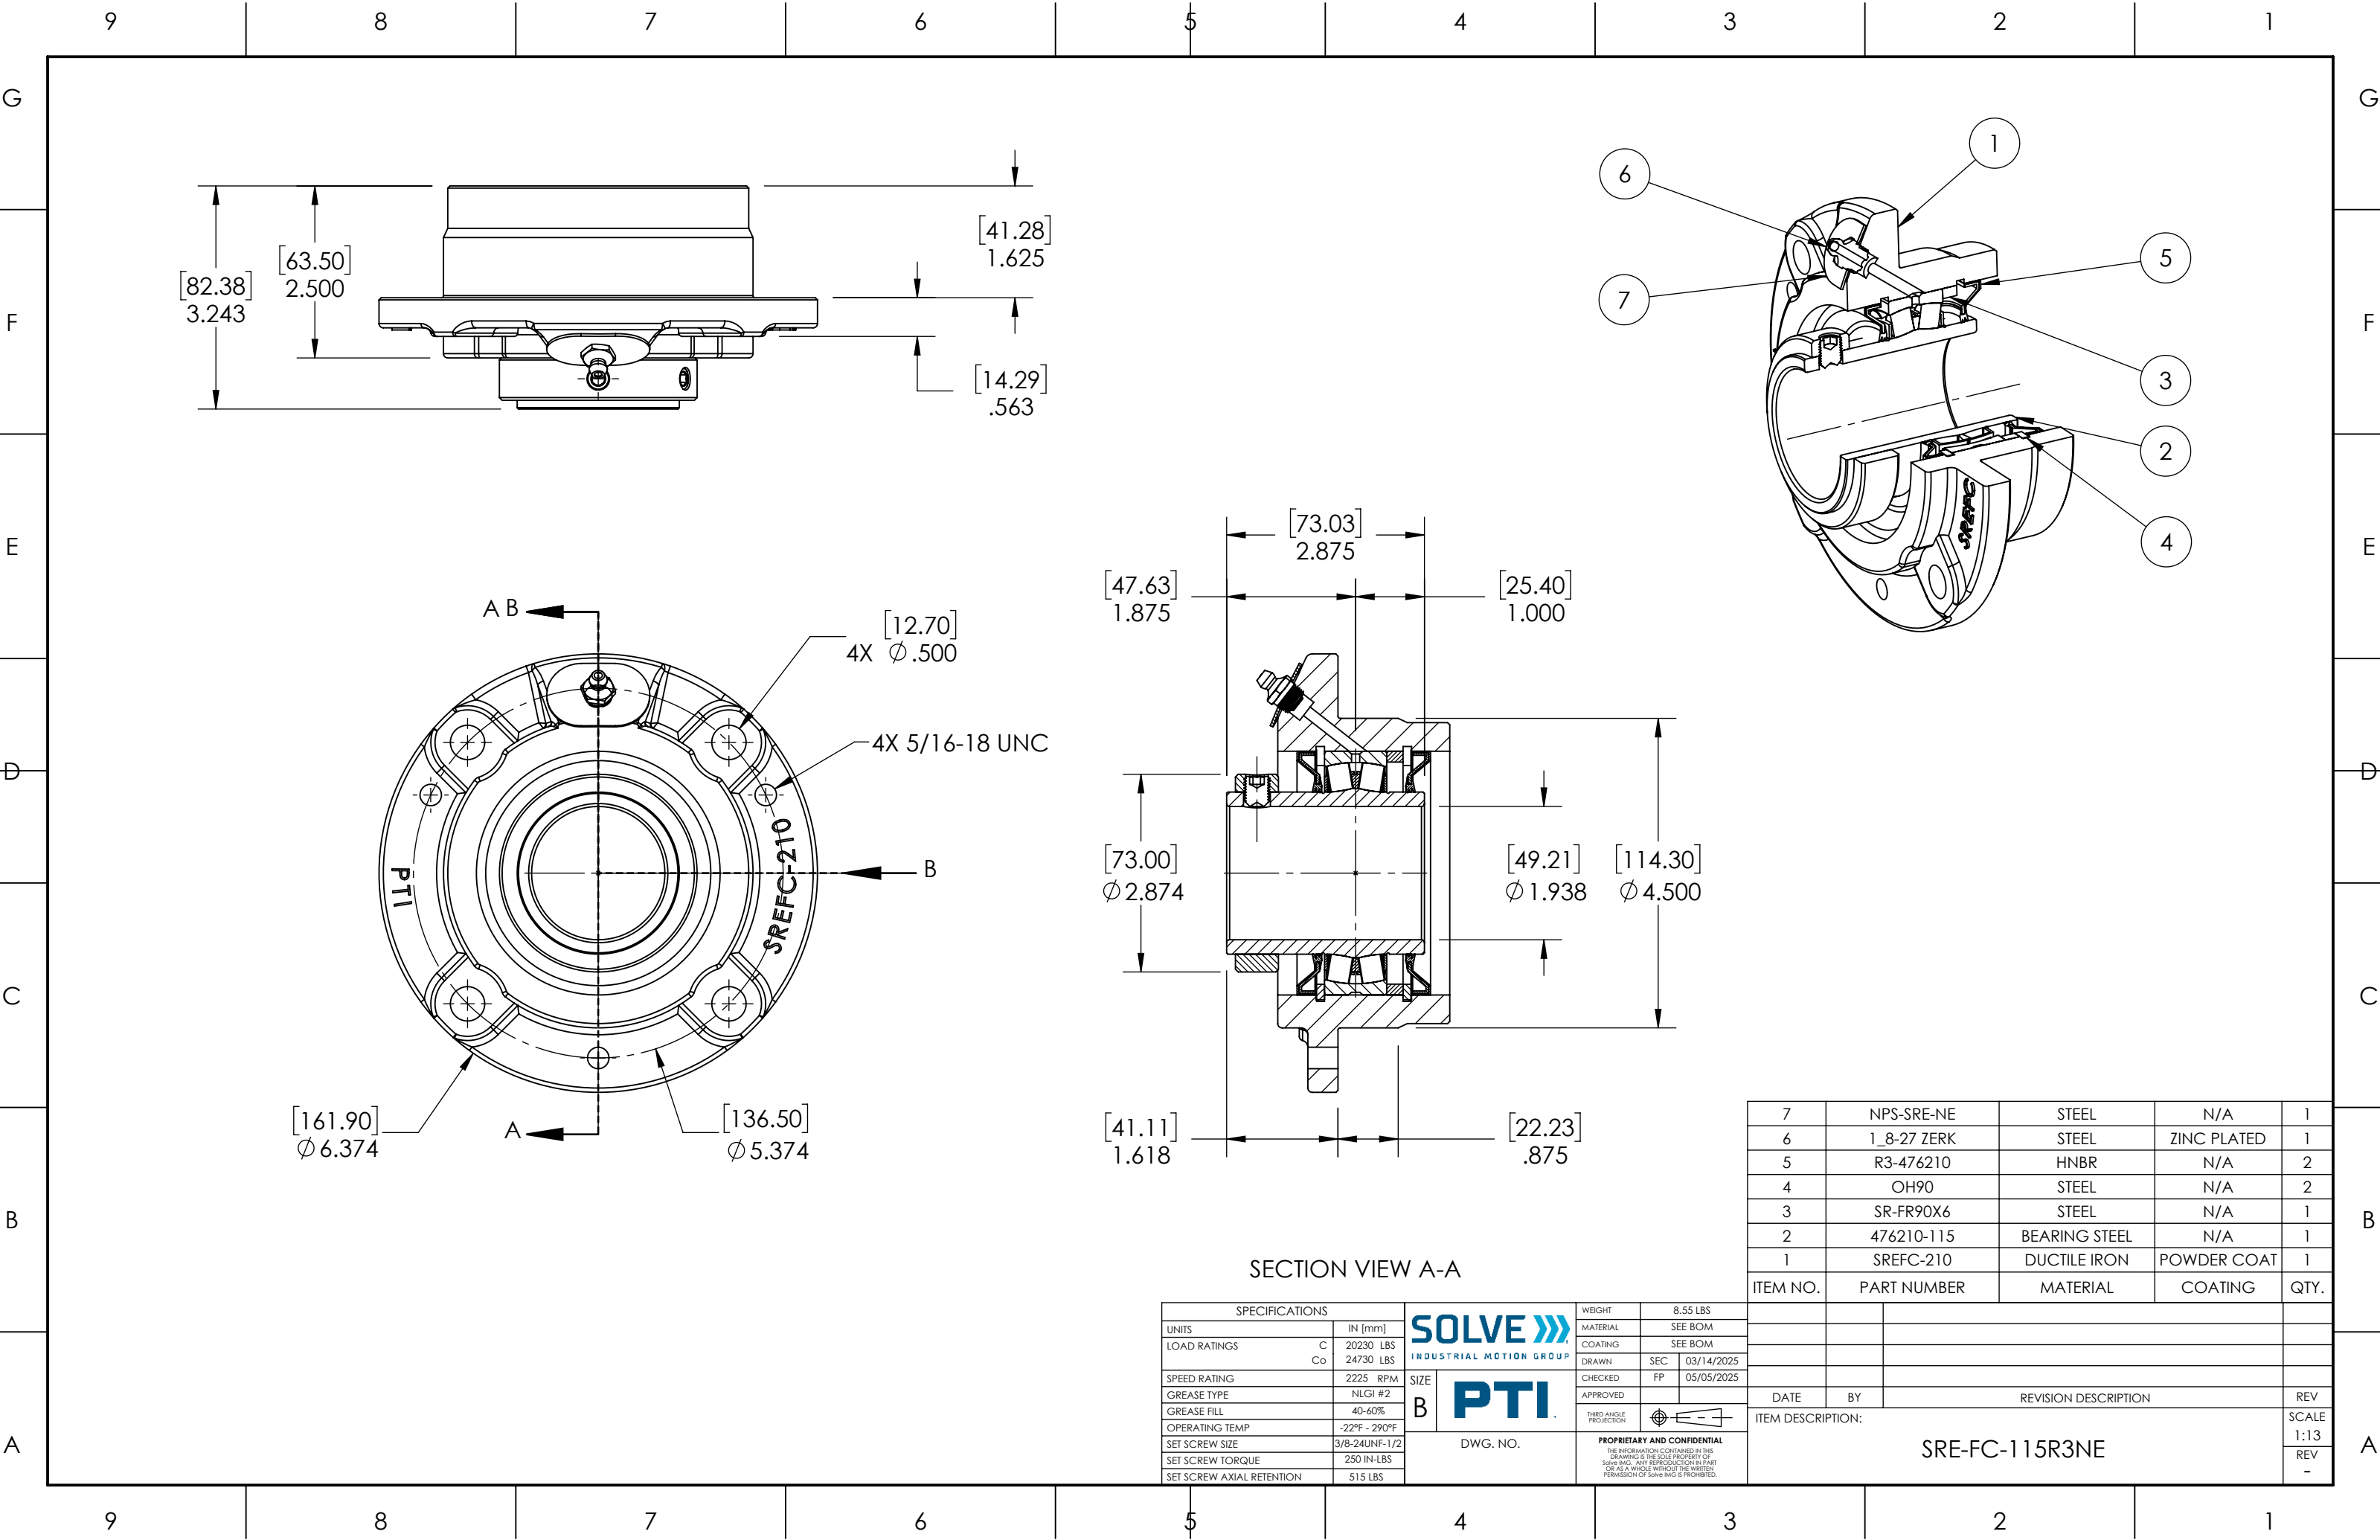

SECTION VIEW A-A

SPECIFICATIONS		SOLVE		WEIGHT	8.55 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C 20230 LBS Co 24730 LBS			COATING	SEE BOM
SPEED RATING	2225 RPM			DRAWN	SEC 03/14/2025
GREASE TYPE	NLGI #2			CHECKED	FP 05/05/2025
GREASE FILL	40-60%	PTI	DWG. NO.	APPROVED	
OPERATING TEMP	-22°F - 290°F			THIRD ANGLE PROJECTION	
SET SCREW SIZE	3/8-24UNF-1/2			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	250 IN-LBS				
SET SCREW AXIAL RETENTION	515 LBS				

7	NPS-SRE-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476210	HNBR	N/A	2
4	OH90	STEEL	N/A	2
3	SR-FR90X6	STEEL	N/A	1
2	476210-115	BEARING STEEL	N/A	1
1	SREFC-210	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-FC-115R3NE			1:13
			REV
			-