
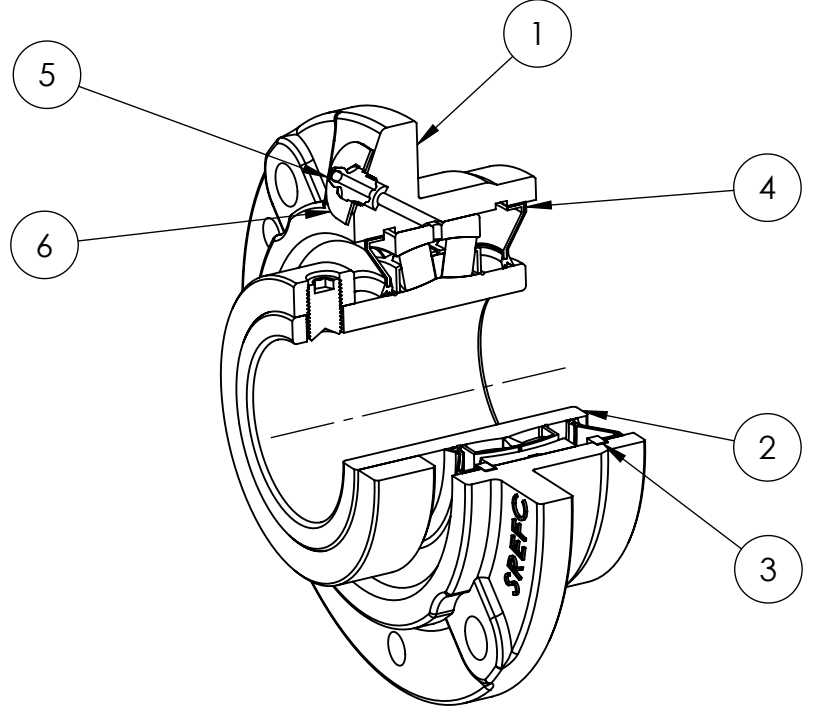
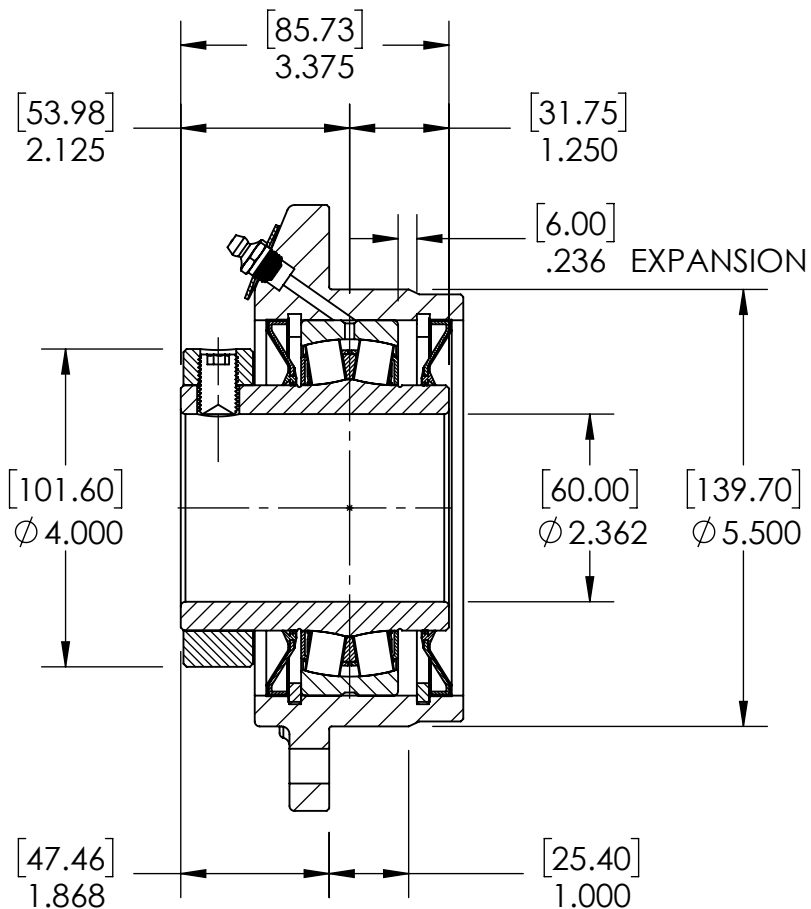
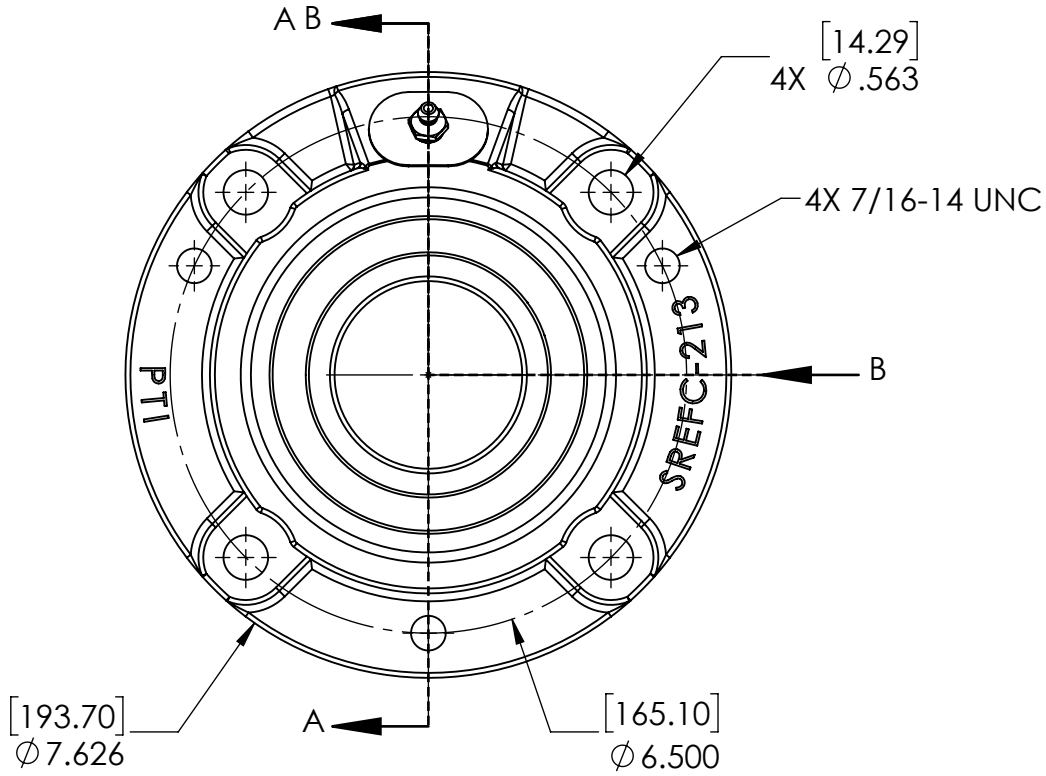


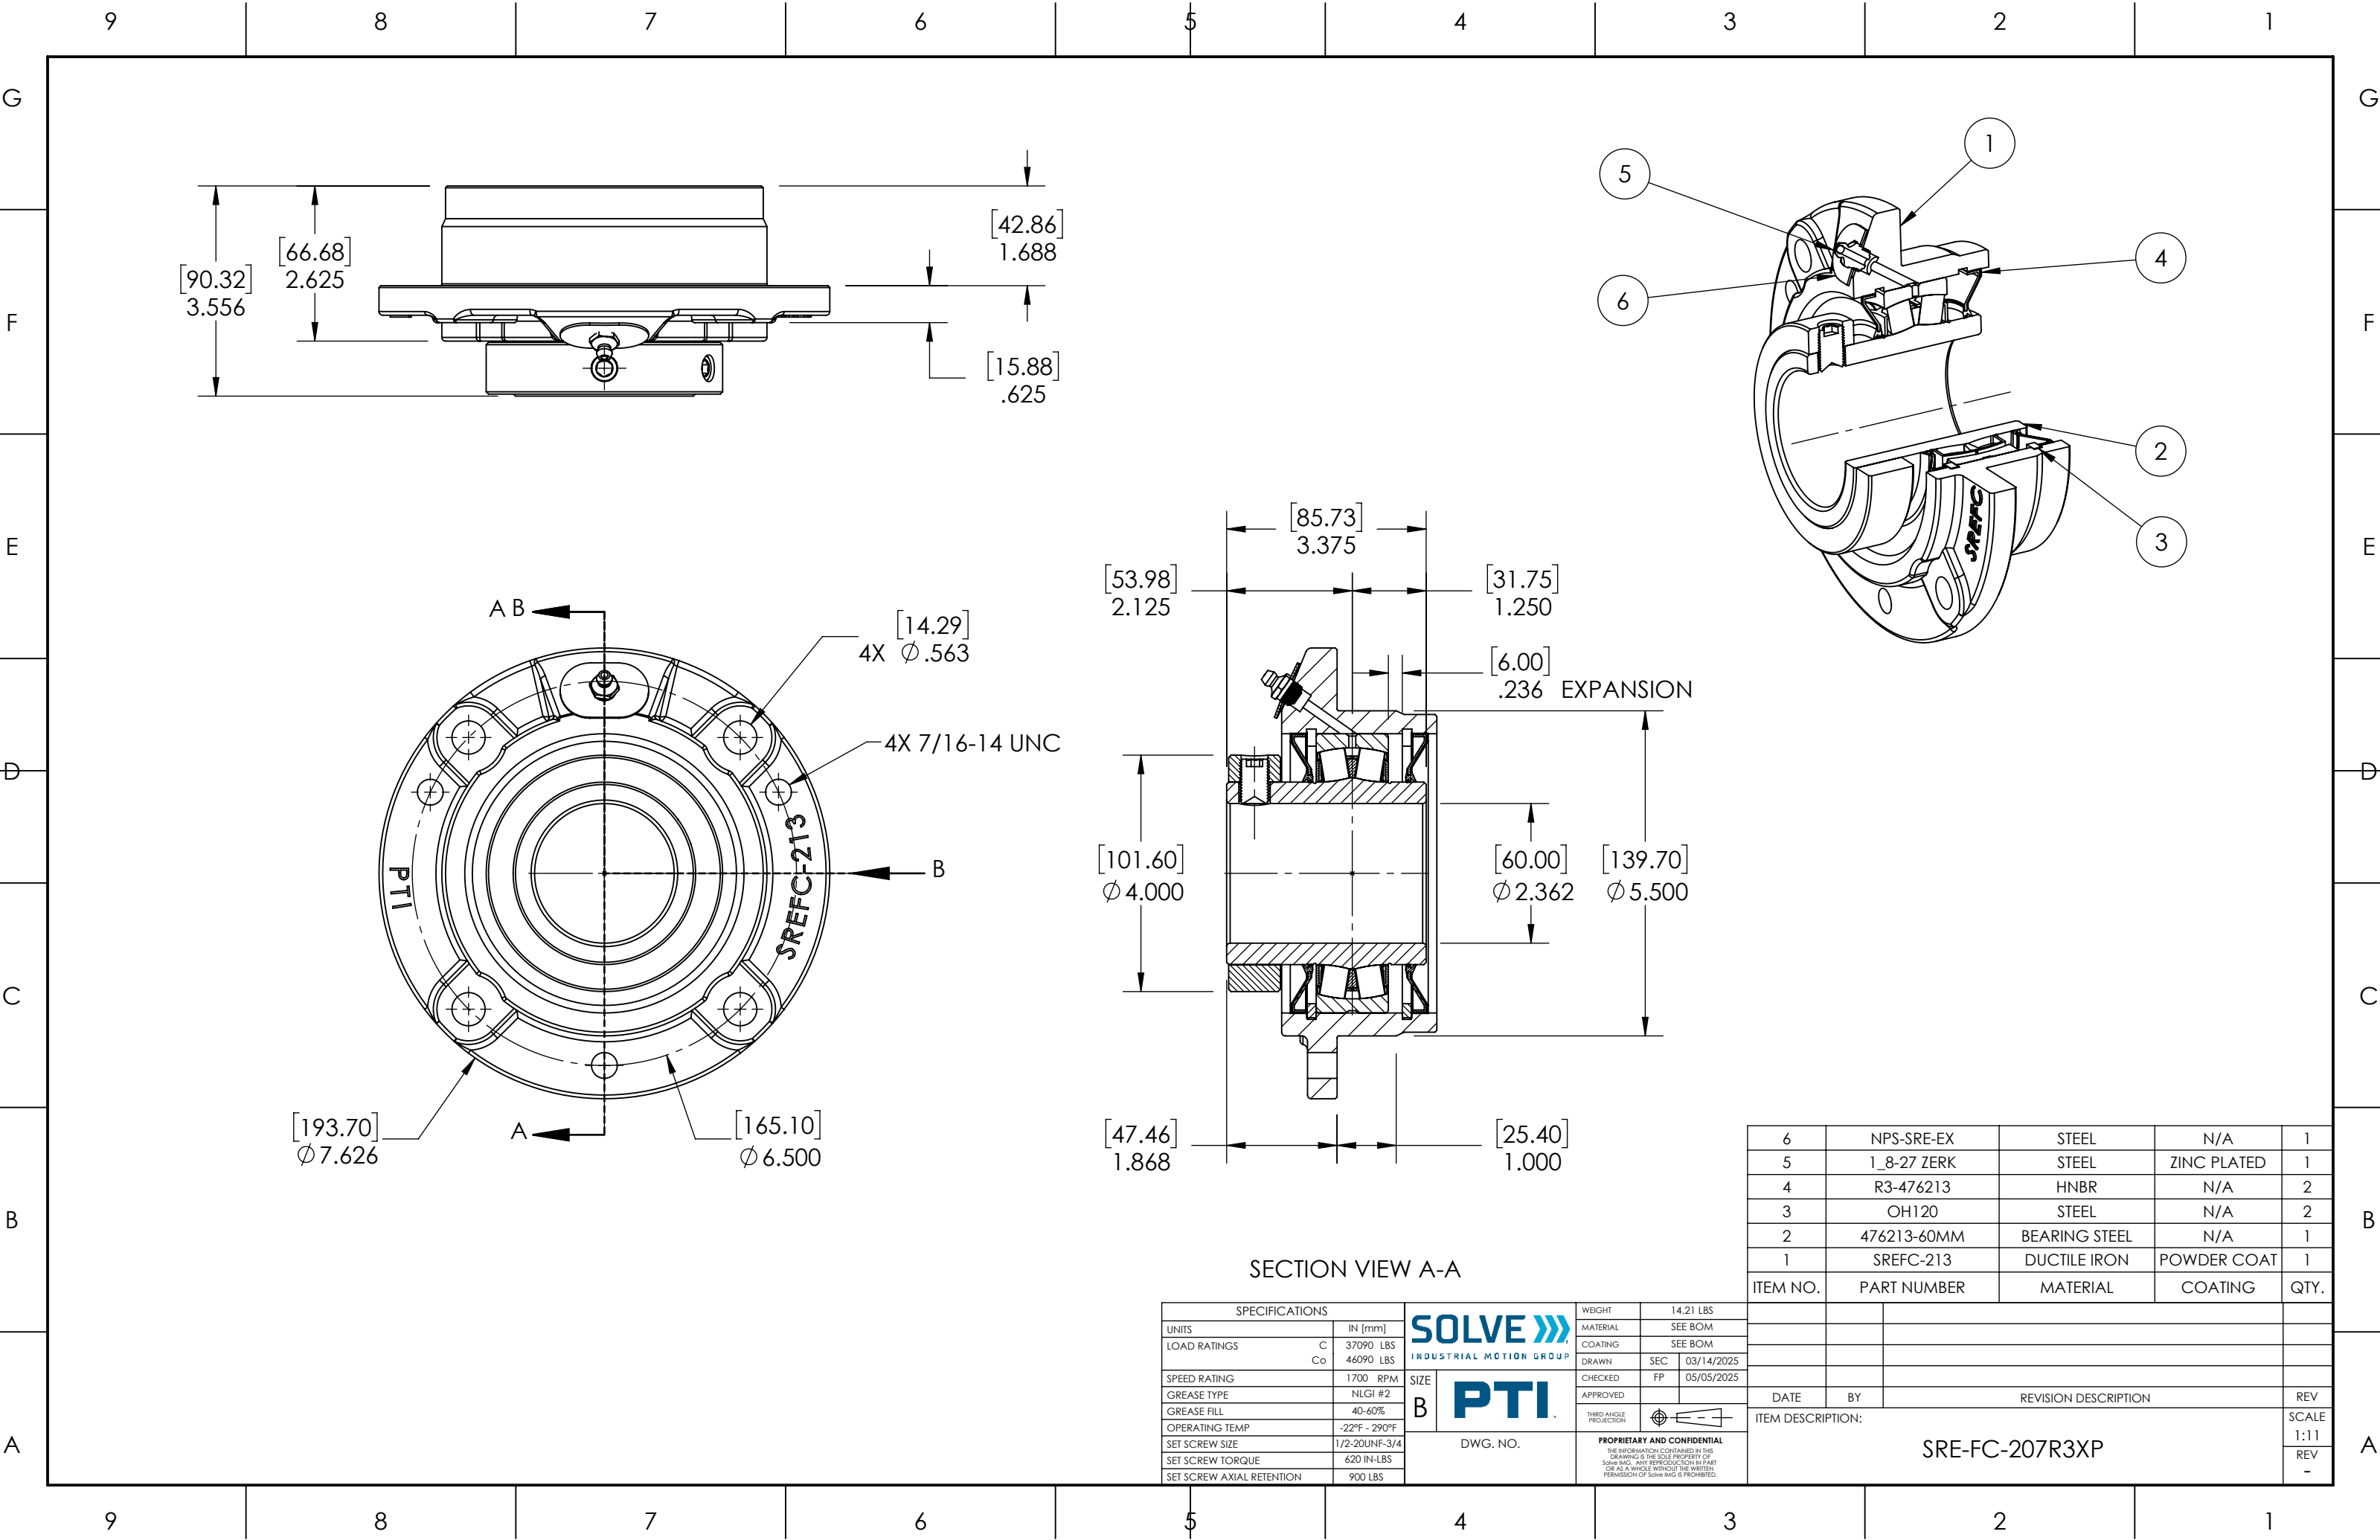

SECTION VIEW A-A

6	NPS-SRE-EX	STEEL	N/A	1
5	1.8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476213	HNBR	N/A	2
3	OH120	STEEL	N/A	2
2	476213-60MM	BEARING STEEL	N/A	1
1	SREFC-213	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		WEIGHT		14.21 LBS	
UNITS	IN [mm]	MATERIAL		SEE BOM	
LOAD RATINGS	C 37090 LBS Co 46090 LBS	COATING		SEE BOM	
SPEED RATING	1700 RPM	DRAWN	SEC	03/14/2025	
GREASE TYPE	NLGI #2	CHECKED	FP	05/05/2025	
GREASE FILL	40-60%	APPROVED			
OPERATING TEMP	-22°F - 290°F	THIRD ANGLE PROJECTION			
SET SCREW SIZE	1/2-20UNF-3/4	DWG. NO.			
SET SCREW TORQUE	620 IN-LBS	PROPRIETARY AND CONFIDENTIAL			
SET SCREW AXIAL RETENTION	900 LBS	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
SIZE B		DATE		BY	
		REVISION DESCRIPTION		REV	
		ITEM DESCRIPTION:		SCALE	
		SRE-FC-207R3XP		1:11	
				REV	
				-	