
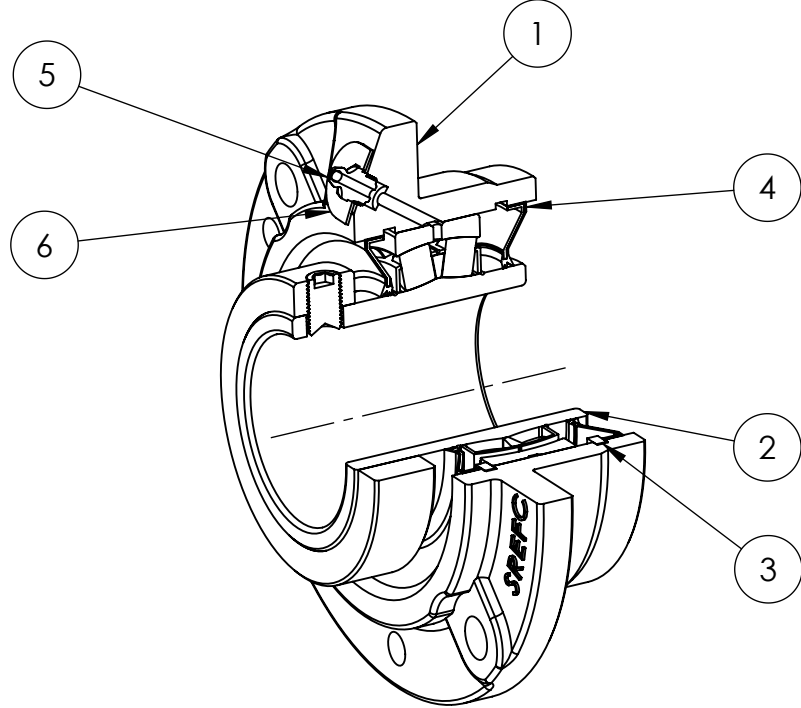
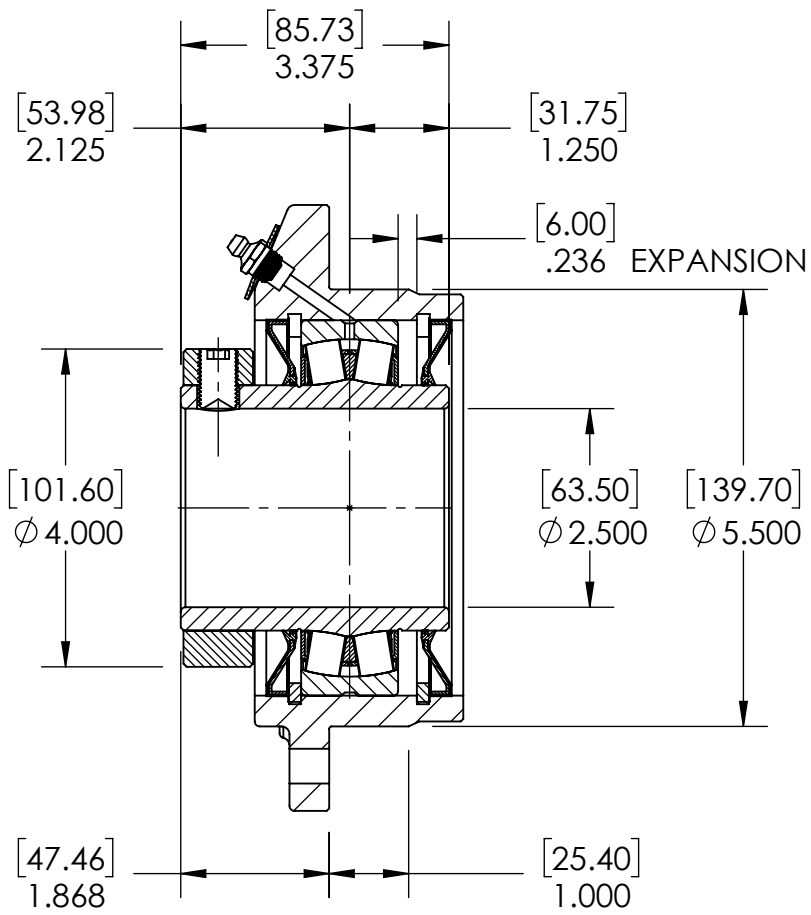
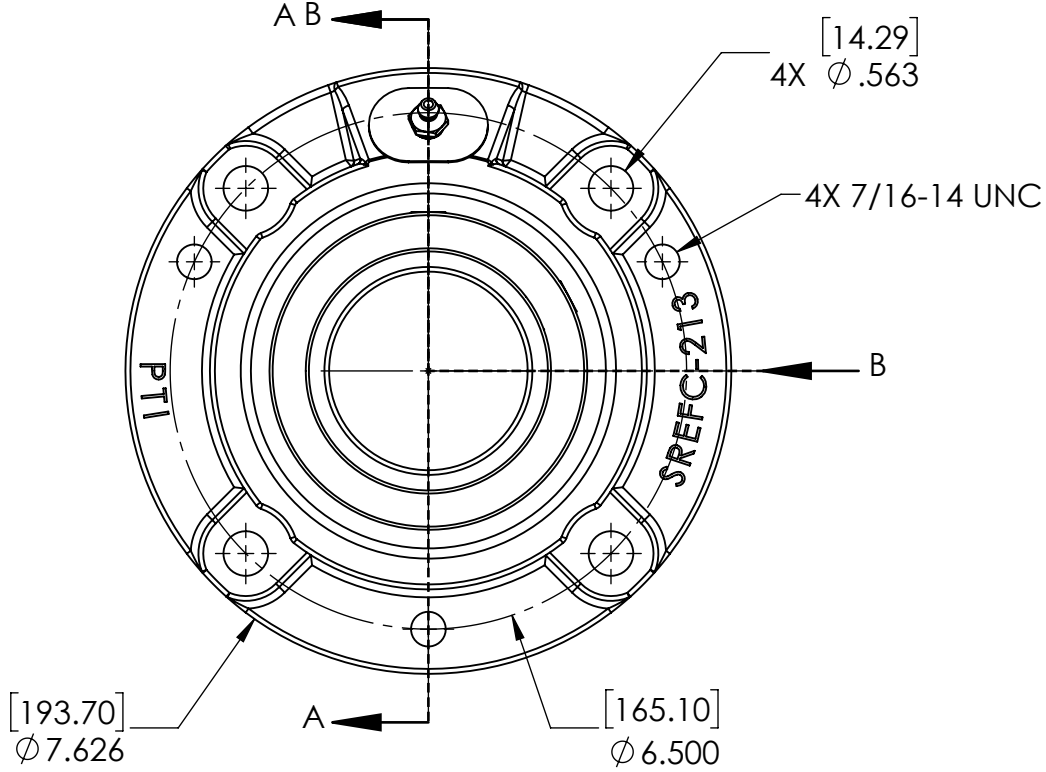
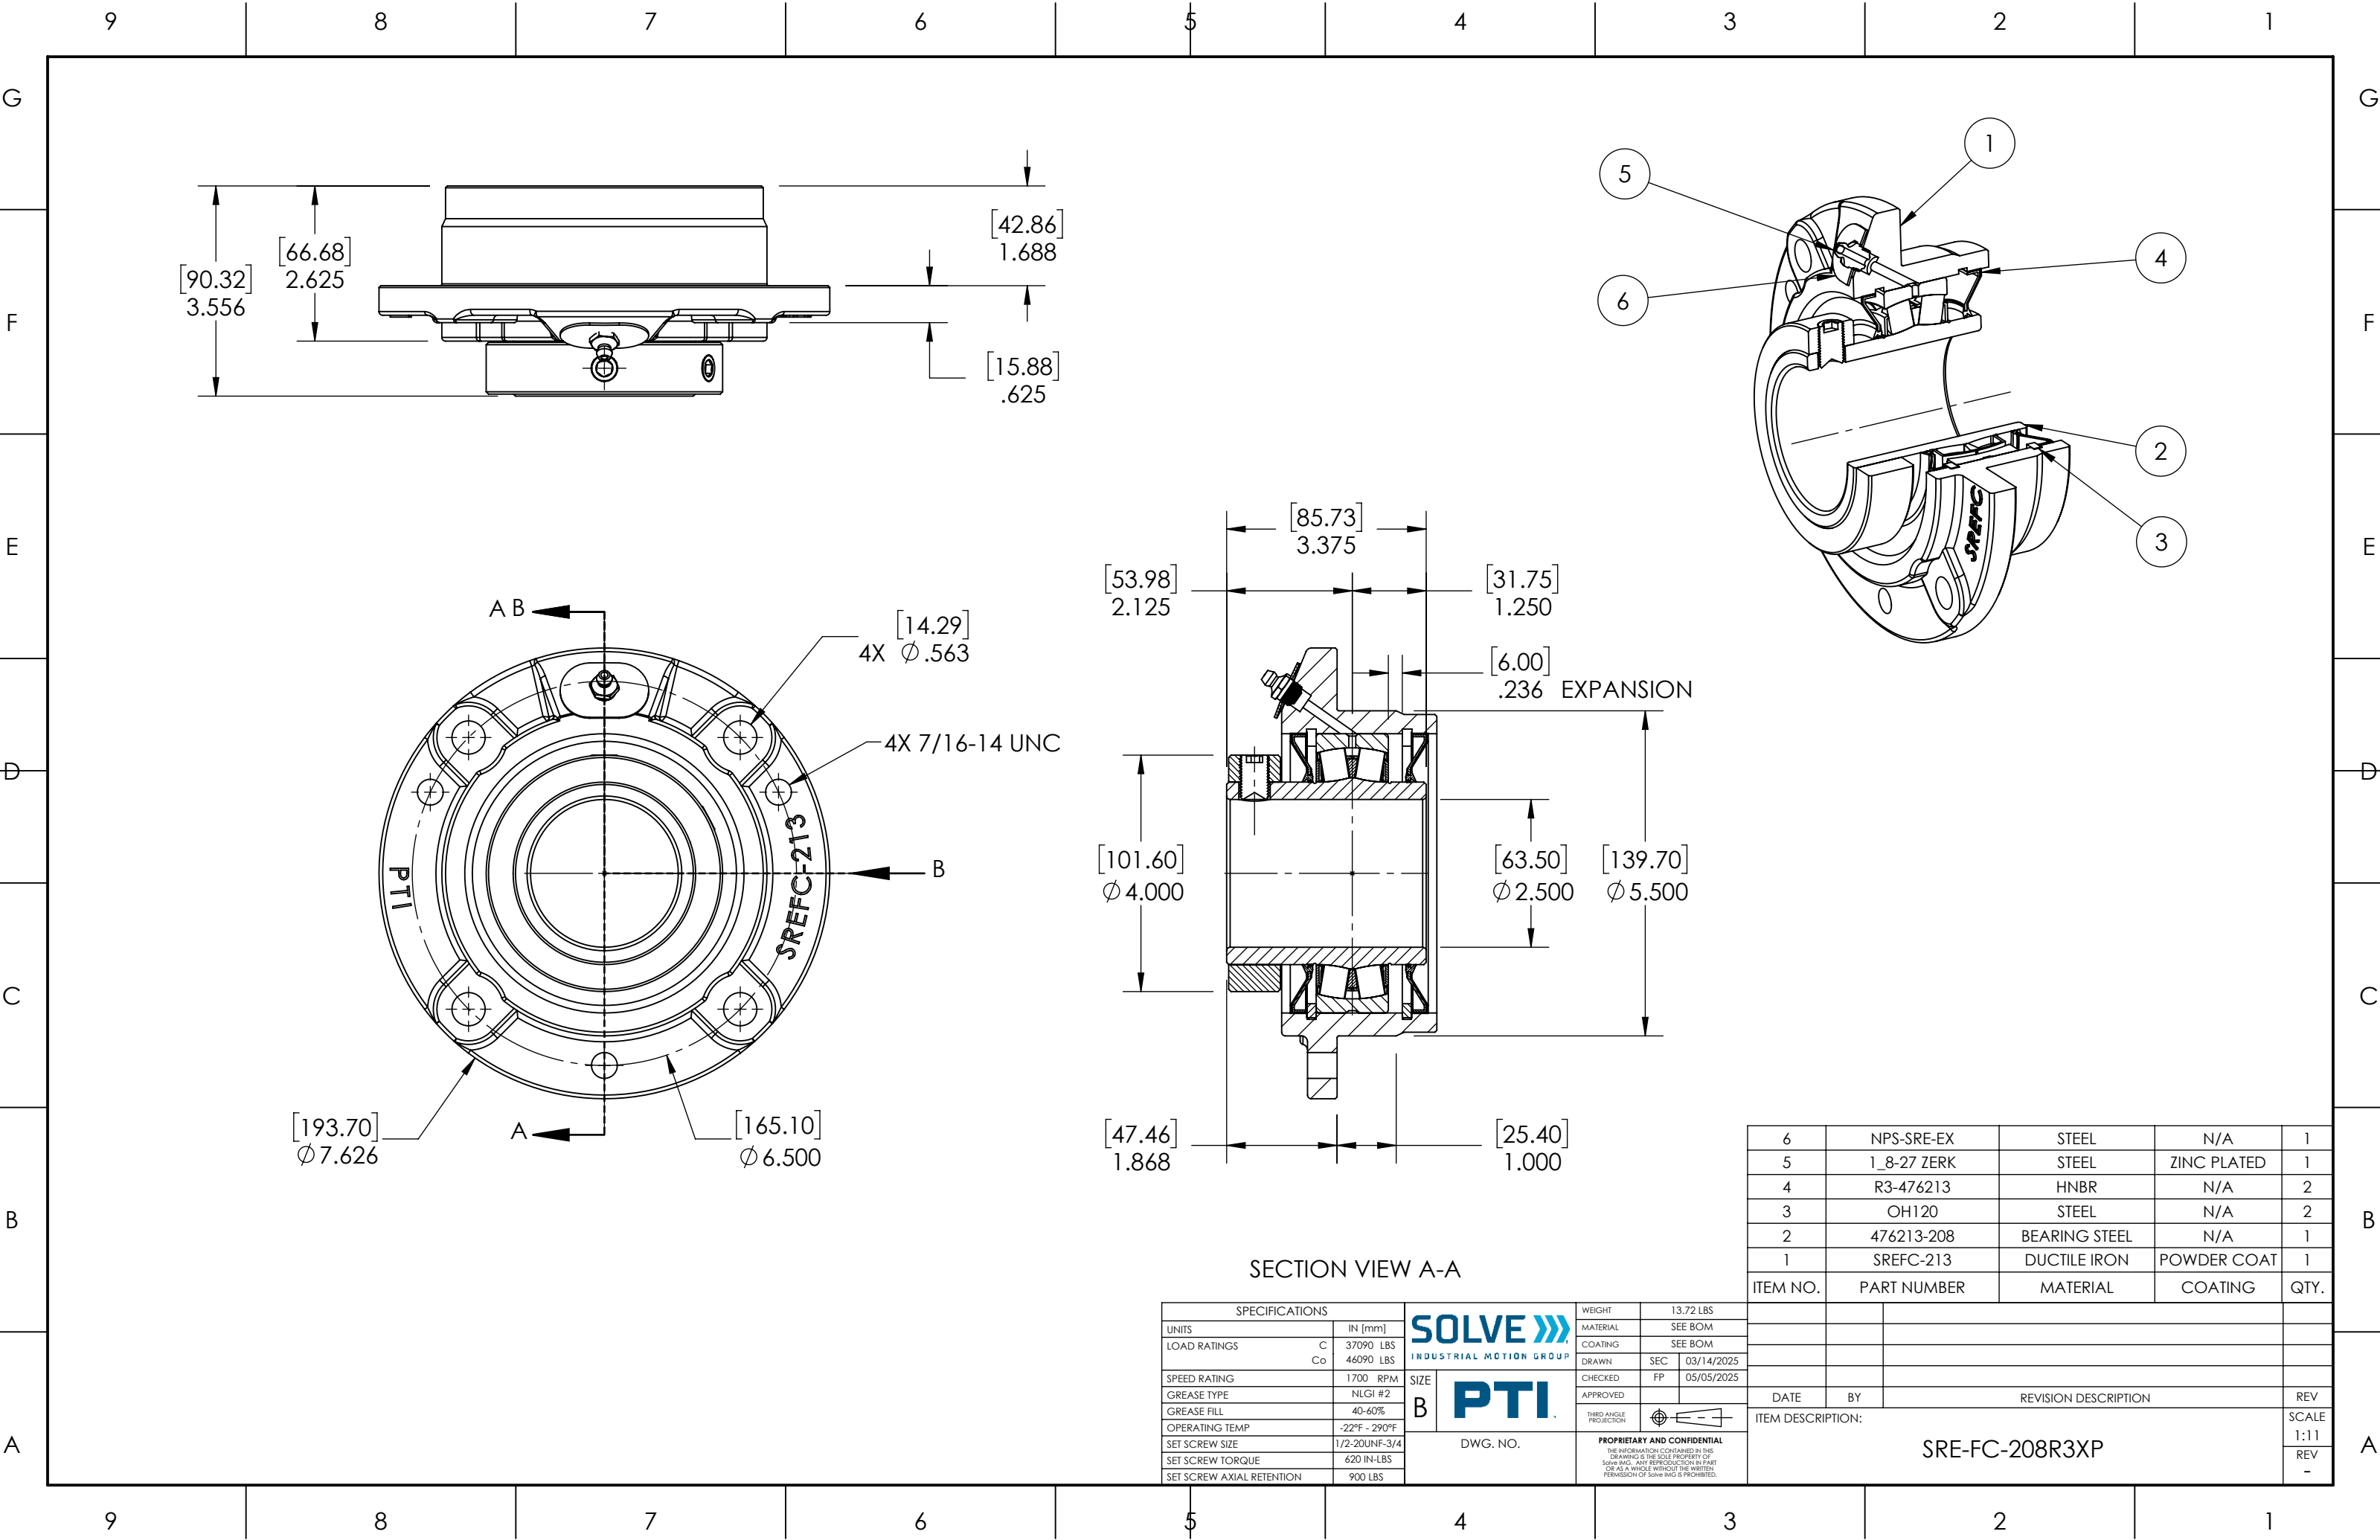




SECTION VIEW A-A

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	13.72 LBS
LOAD RATINGS	C 37090 LBS Co 46090 LBS	SIZE PTI		COATING	SEE BOM
SPEED RATING	1700 RPM	DWG. NO.		DRAWN	SEC 03/14/2025
GREASE TYPE	NLGI #2			CHECKED	FP 05/05/2025
GREASE FILL	40-60%			APPROVED	
OPERATING TEMP	-22°F - 290°F			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW SIZE	1/2-20UNF-3/4				
SET SCREW TORQUE	620 IN-LBS				
SET SCREW AXIAL RETENTION	900 LBS				

ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.
6	NPS-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476213	HNBR	N/A	2
3	OH120	STEEL	N/A	2
2	476213-208	BEARING STEEL	N/A	1
1	SREFC-213	DUCTILE IRON	POWDER COAT	1
ITEM DESCRIPTION: SRE-FC-208R3XP				
DATE				REV
BY				SCALE
REVISION DESCRIPTION				REV
				-