
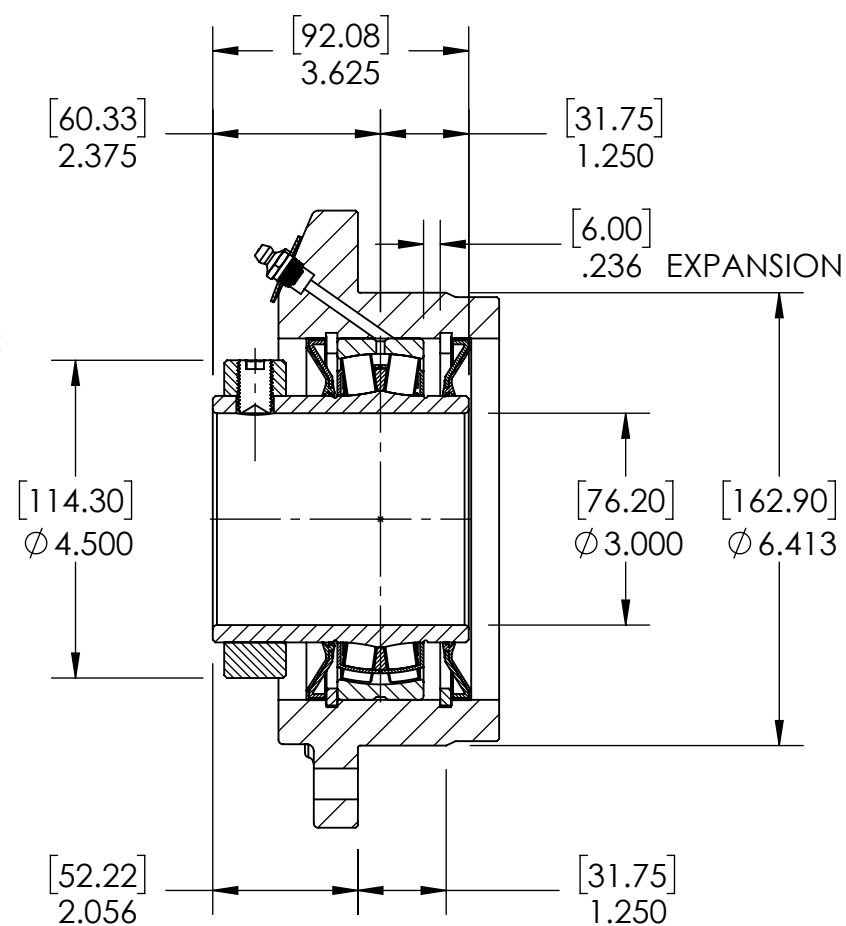
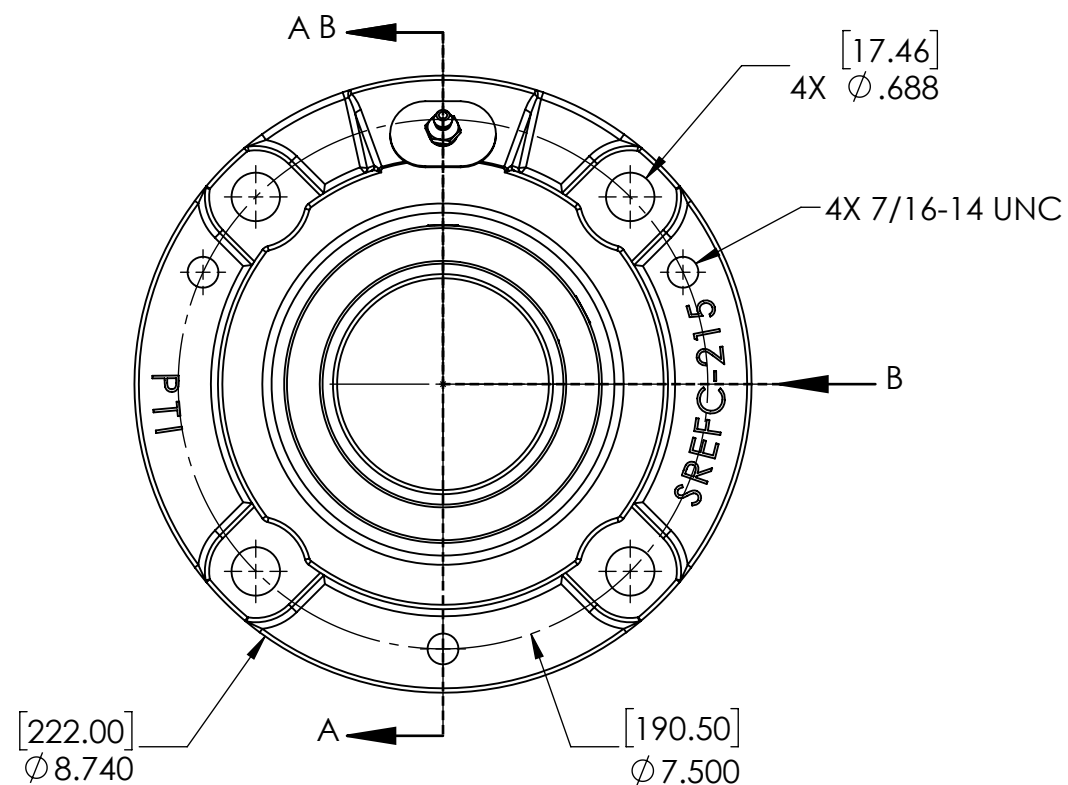
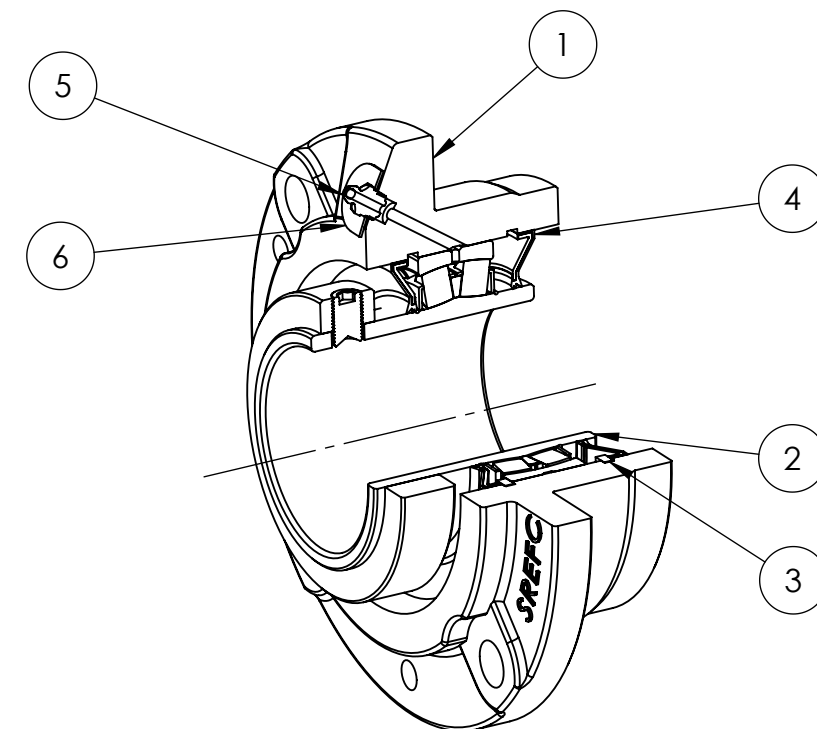


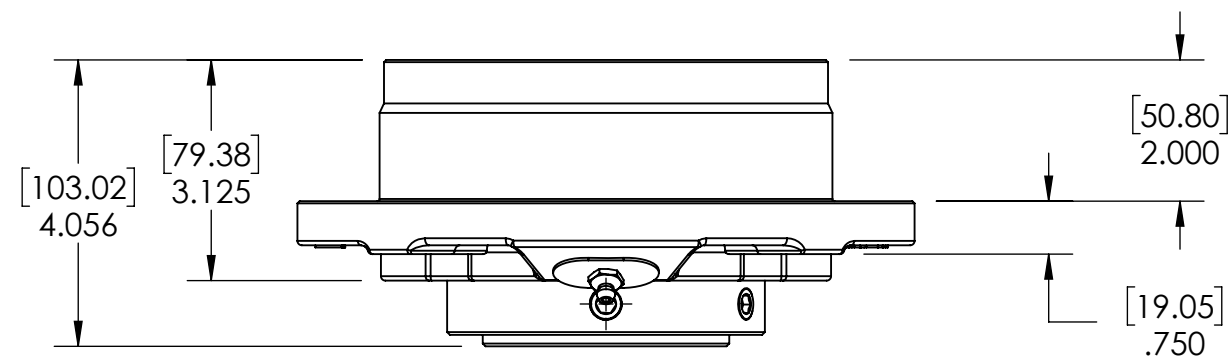

SECTION VIEW A-A

SPECIFICATIONS				WEIGHT	21.13 LBS
UNITS		IN [mm]		MATERIAL	SEE BOM
LOAD RATINGS	C	41590 LBS	SIZE B 	COATING	SEE BOM
	Co	52830 LBS		DRAWN	SEC 05/05/20
SPEED RATING		1500 RPM		CHECKED	FP 05/05/20
GREASE TYPE		NLGI #2		APPROVED	
GREASE FILL		40-60%			
OPERATING TEMP		-22°F - 290°F		THIRD ANGLE PROJECTION	
SET SCREW SIZE		1/2-20UNF-3/4	DWG. NO.	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVING INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVING INC. IS PROHIBITED.	
SET SCREW TORQUE		620 IN-LBS			
SET SCREW AXIAL RETENTION		900 LBS			

6	NPS-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-300	BEARING STEEL	N/A	1
1	SREFC-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

25				
25				
	DATE	BY	REVISION DESCRIPTION	REV
-	ITEM DESCRIPTION:			SCALE
	SRE-FC-300R3XP			1:10
				REV
				-