
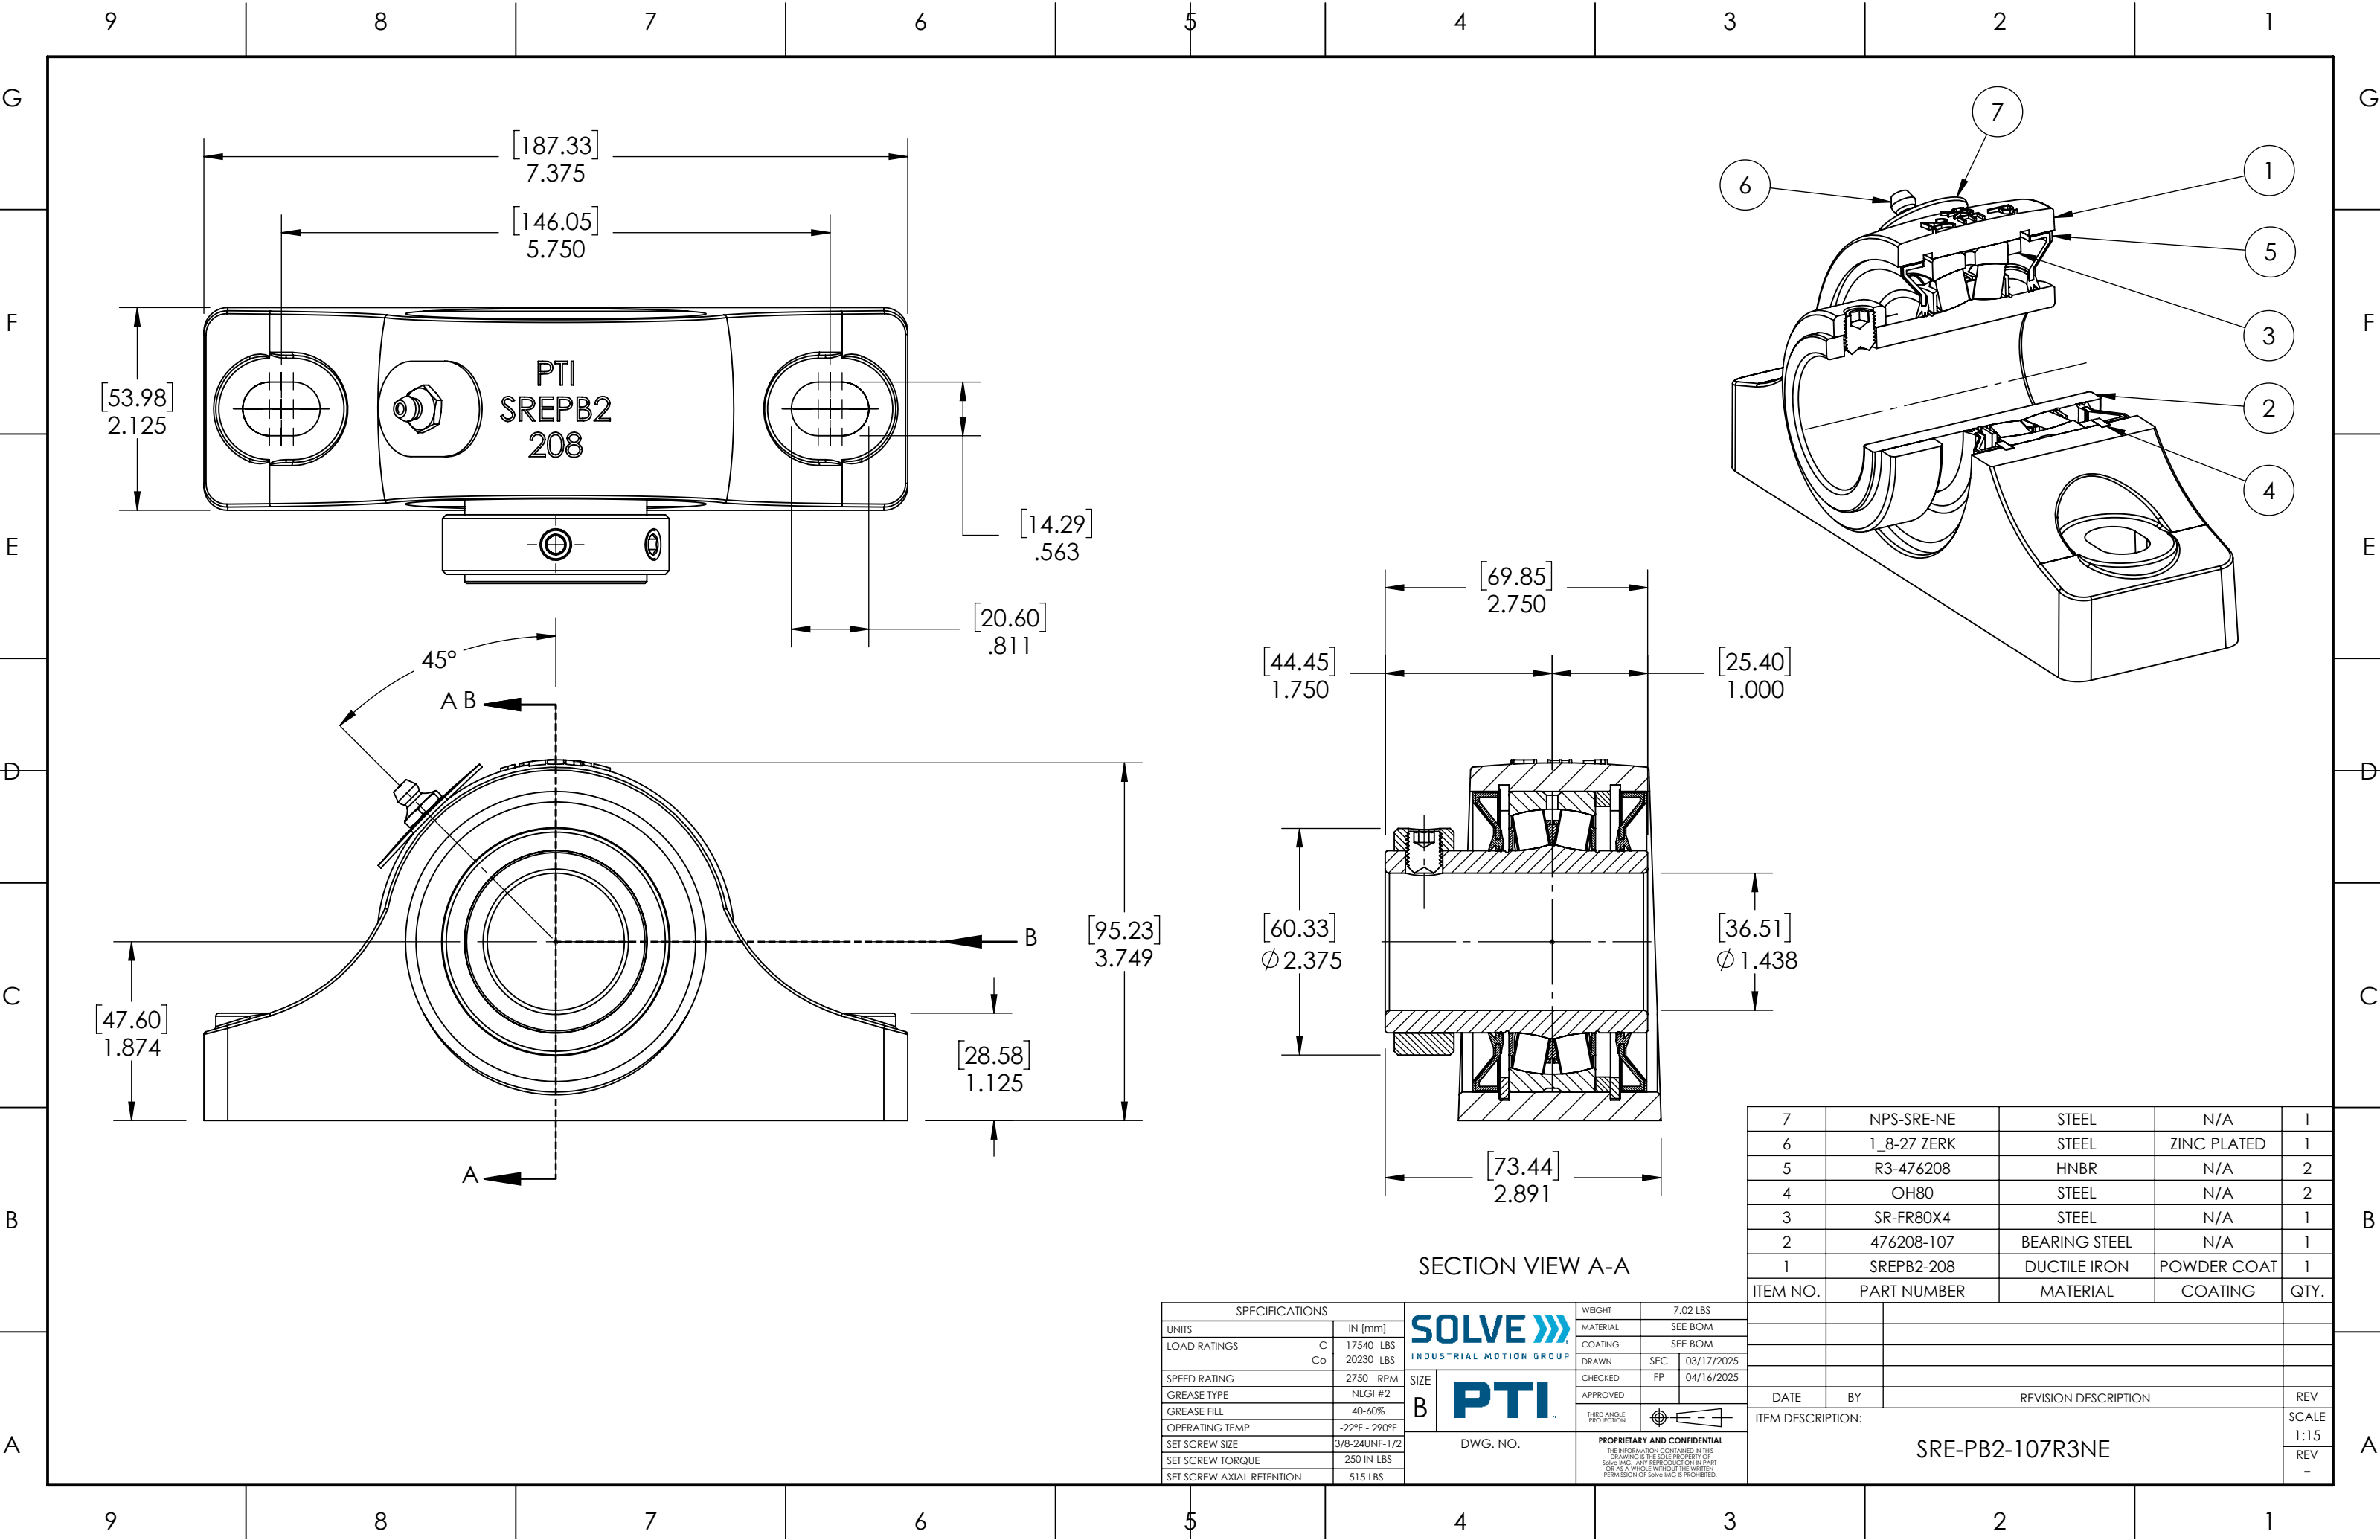




7	NPS-SRE-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476208	HNBR	N/A	2
4	OH80	STEEL	N/A	2
3	SR-FR80X4	STEEL	N/A	1
2	476208-107	BEARING STEEL	N/A	1
1	SREP2-208	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT		7.02 LBS	
UNITS	IN [mm]	17540 LBS		SEE BOM		SEE BOM	
LOAD RATINGS	C Co	20230 LBS		SEE BOM		SEE BOM	
SPEED RATING		2750 RPM		DRAWN		SEC 03/17/2025	
GREASE TYPE		NLGI #2		CHECKED		FP 04/16/2025	
GREASE FILL		40-60%		APPROVED			
OPERATING TEMP		-22°F - 290°F		THIRD ANGLE PROJECTION			
SET SCREW SIZE		3/8-24UNF-1/2		DWG. NO.		PROPRIETARY AND CONFIDENTIAL	
SET SCREW TORQUE		250 IN-LBS				THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW AXIAL RETENTION		515 LBS					

DATE	BY	REVISION DESCRIPTION	REV
		ITEM DESCRIPTION:	SCALE
		SRE-PB2-107R3NE	1:15
			REV
			-