


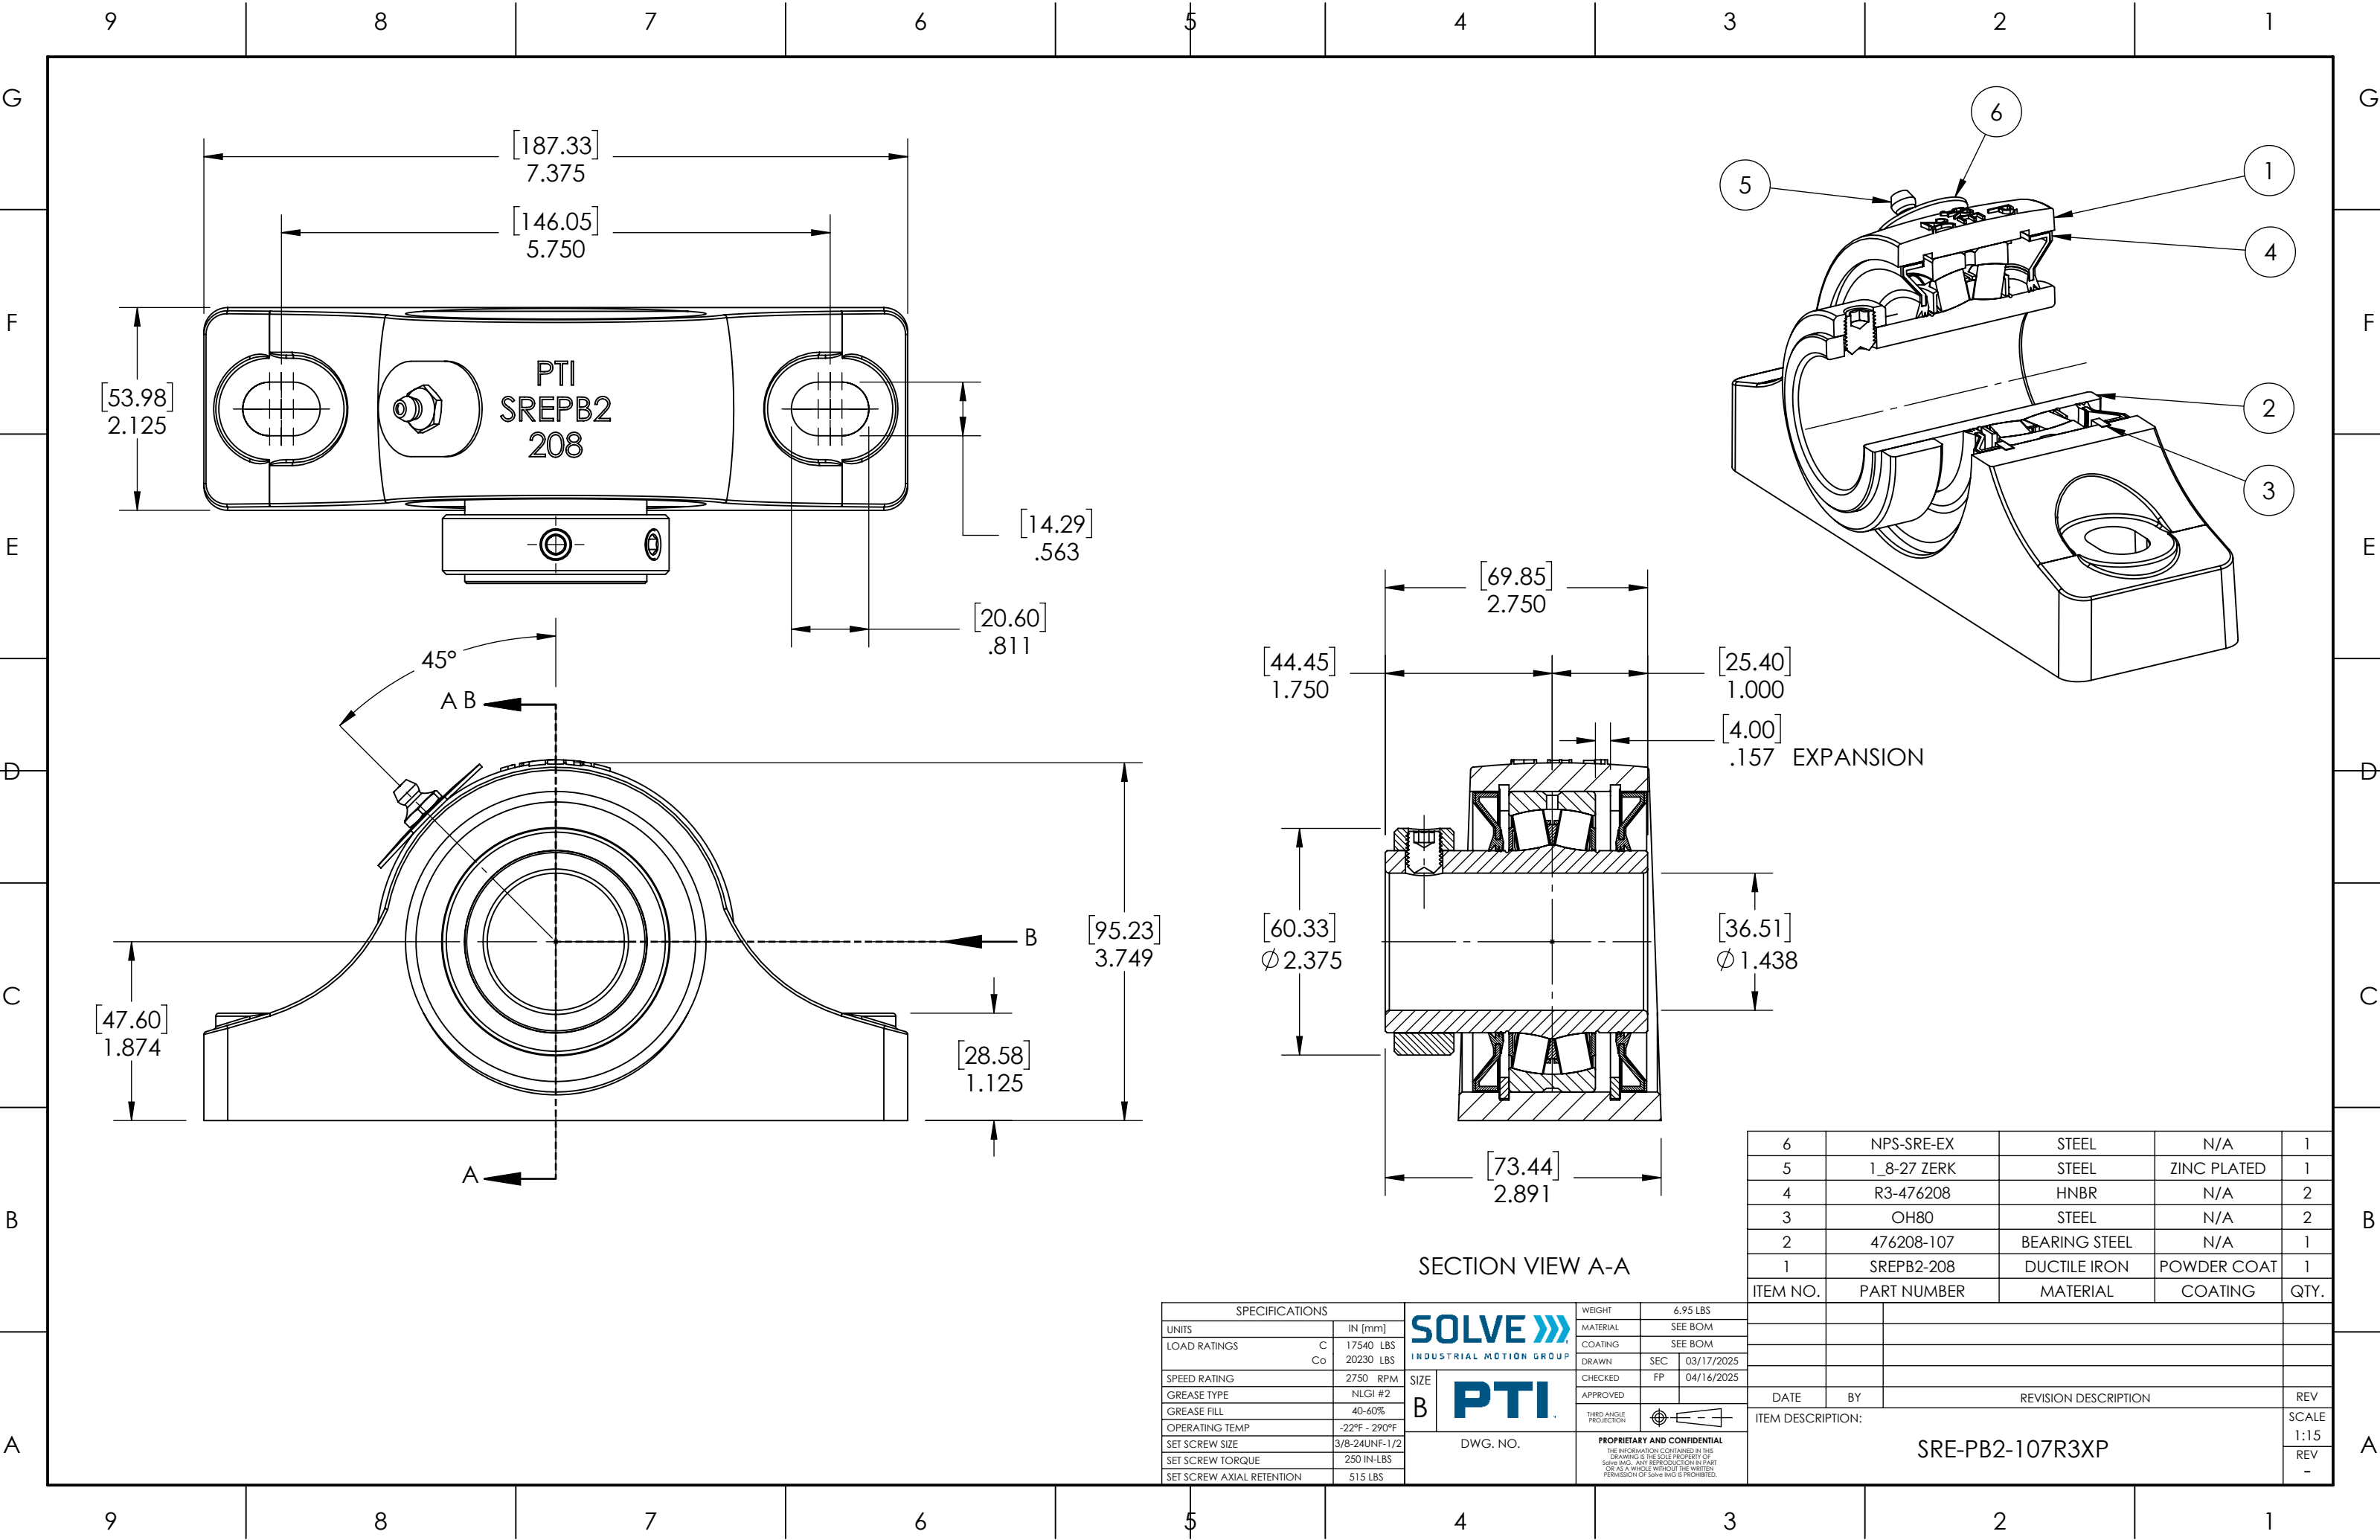

SECTION VIEW A-A

6	NPS-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476208	HNBR	N/A	2
3	OH80	STEEL	N/A	2
2	476208-107	BEARING STEEL	N/A	1
1	SREP2-208	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	6.95 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co	PTI		COATING	SEE BOM
SPEED RATING	2750 RPM			DRAWN	SEC 03/17/2025
GREASE TYPE	NLGI #2	DWG. NO.		CHECKED	FP 04/16/2025
GREASE FILL	40-60%			APPROVED	
OPERATING TEMP	-22°F - 290°F	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
SET SCREW SIZE	3/8-24UNF-1/2				
SET SCREW TORQUE	250 IN-LBS				
SET SCREW AXIAL RETENTION	515 LBS				

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-PB2-107R3XP			1:15
			REV
			-