


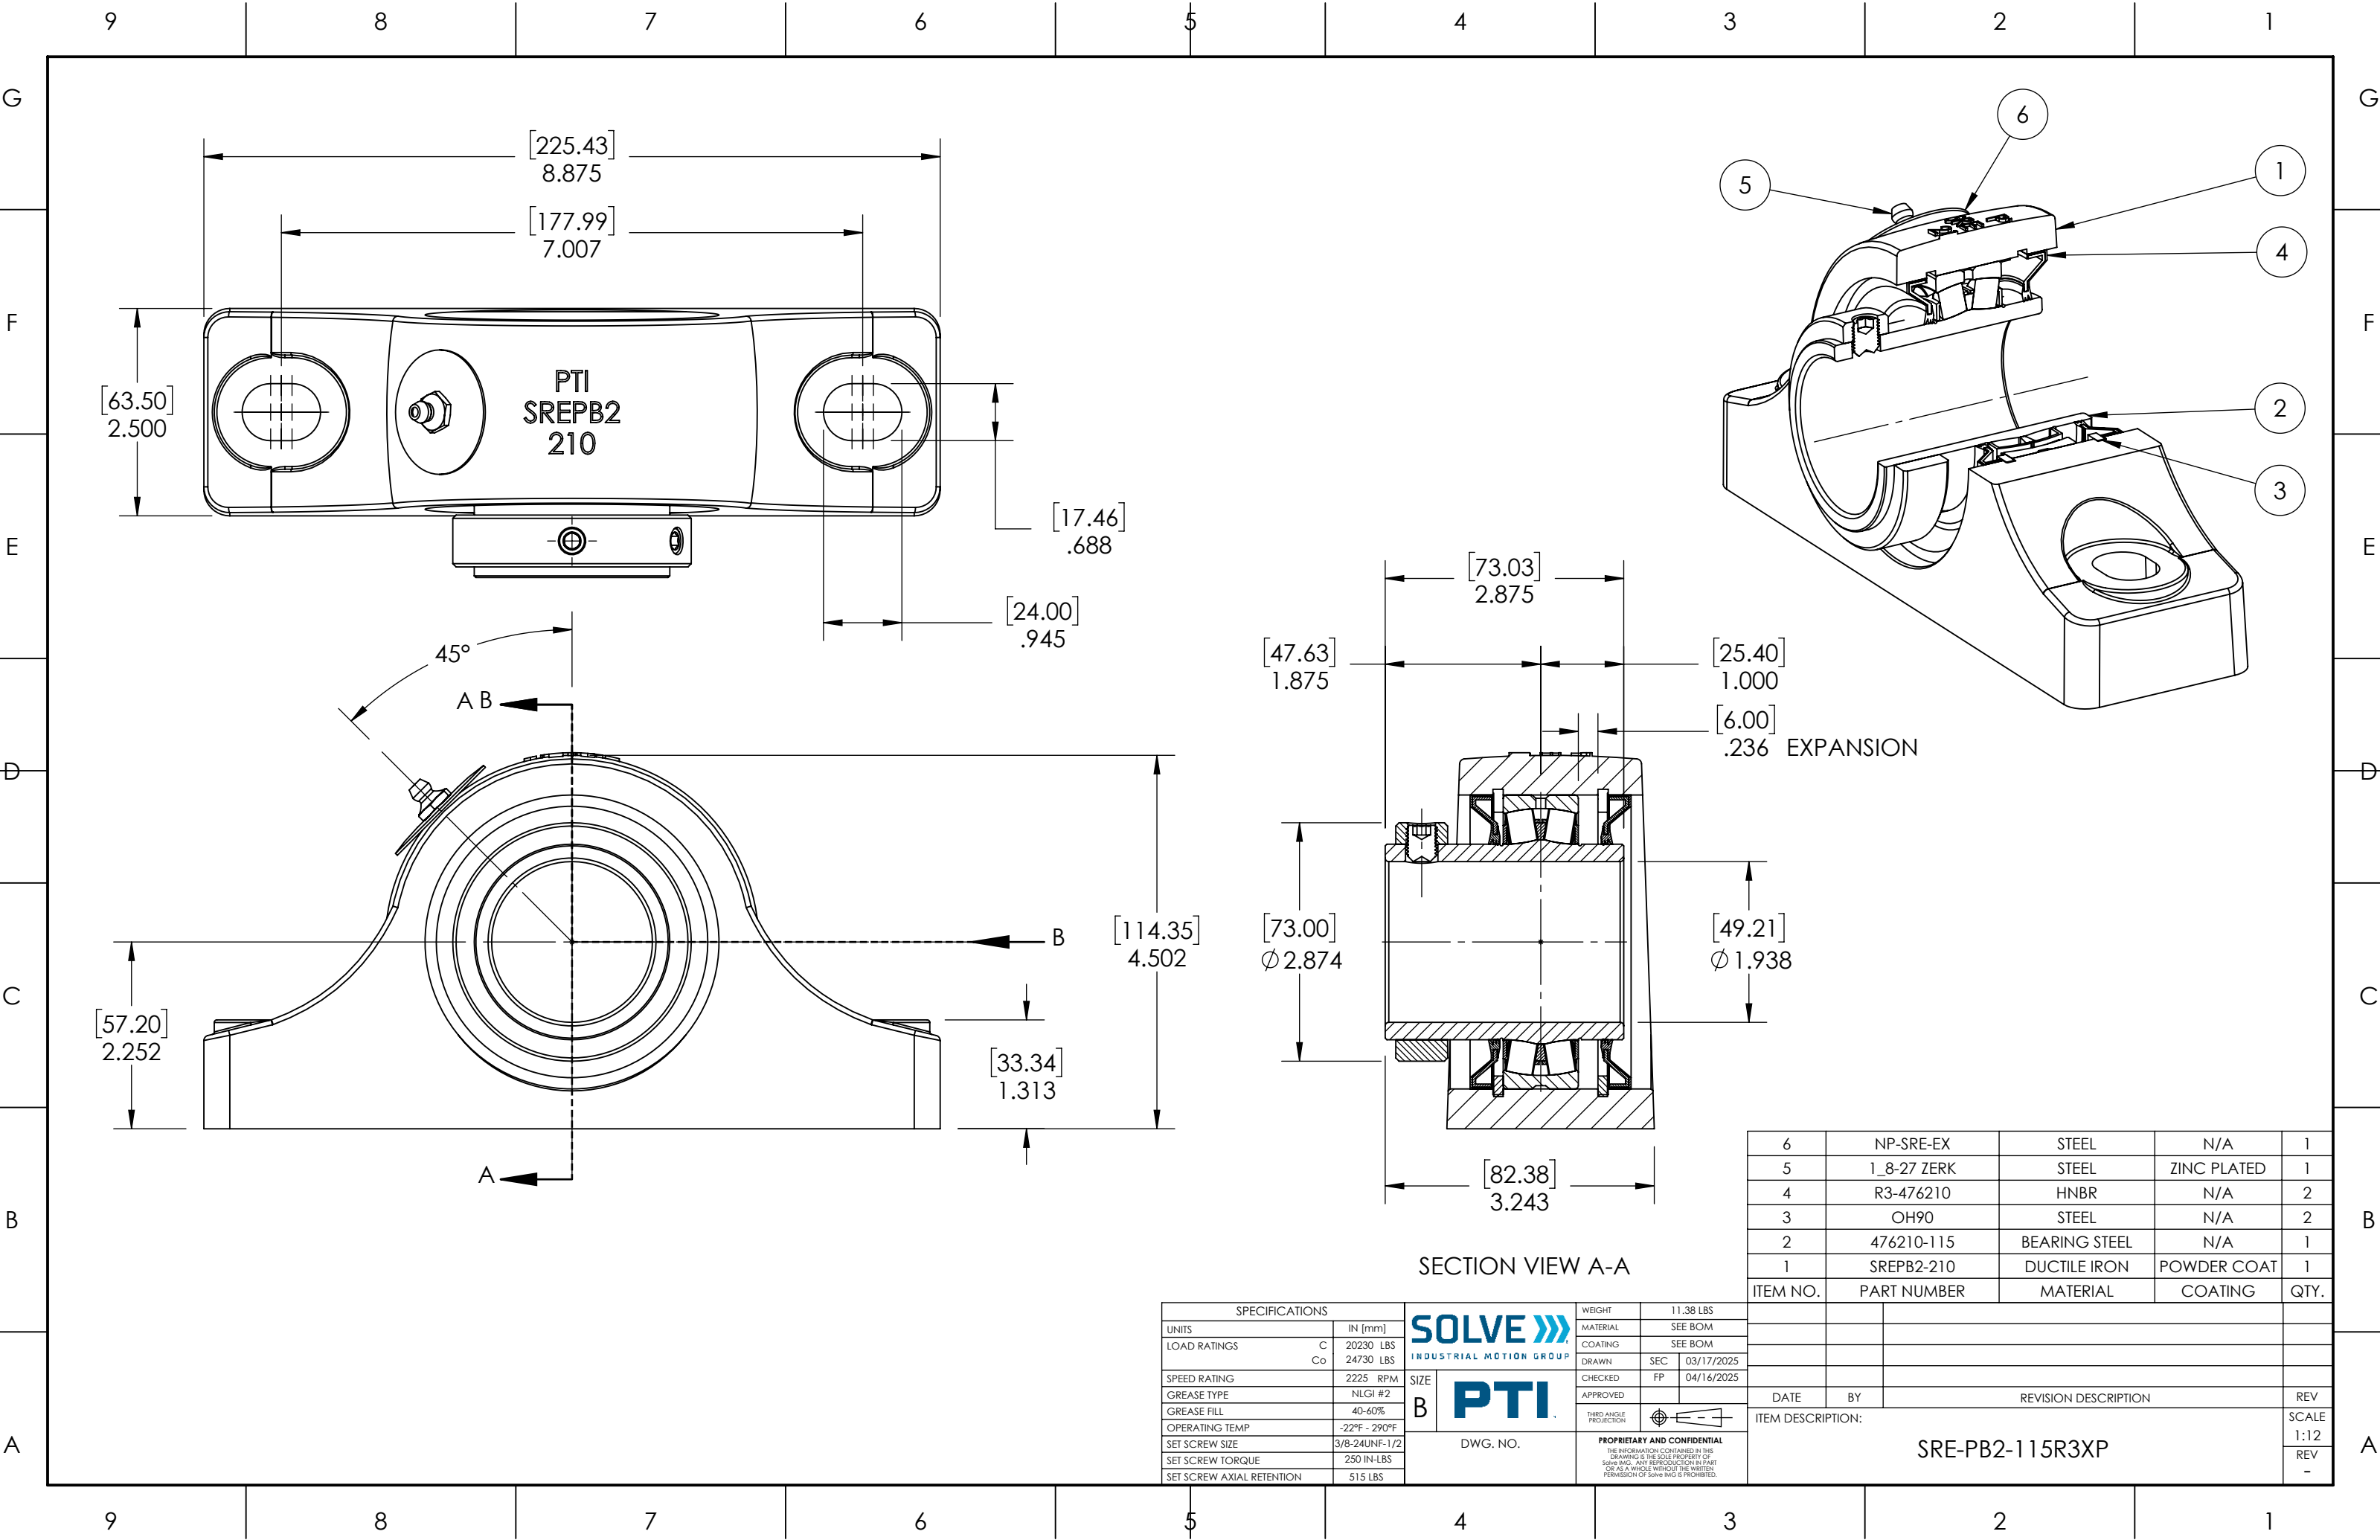

[47.63]
1.875

[73.03]
2.875

[25.40]
1.000

[6.00]
.236

EXPANSION

[73.00]
Ø 2.874

[49.21]
Ø 1.938

[82.38]
3.243

SECTION VIEW A-A

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476210	HNBR	N/A	2
3	OH90	STEEL	N/A	2
2	476210-115	BEARING STEEL	N/A	1
1	SREPB2-210	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	11.38 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C 20230 LBS Co 24730 LBS			COATING	SEE BOM
SPEED RATING	2225 RPM	SIZE	B	DRAWN	SEC 03/17/2025
GREASE TYPE	NLGI #2	PTI		CHECKED	FP 04/16/2025
GREASE FILL	40-60%			APPROVED	
OPERATING TEMP	-22°F - 290°F	DWG. NO.		THIRD ANGLE PROJECTION	
SET SCREW SIZE	3/8-24UNF-1/2			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	250 IN-LBS				
SET SCREW AXIAL RETENTION	515 LBS				

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-PB2-115R3XP			1:12
			REV
			-