
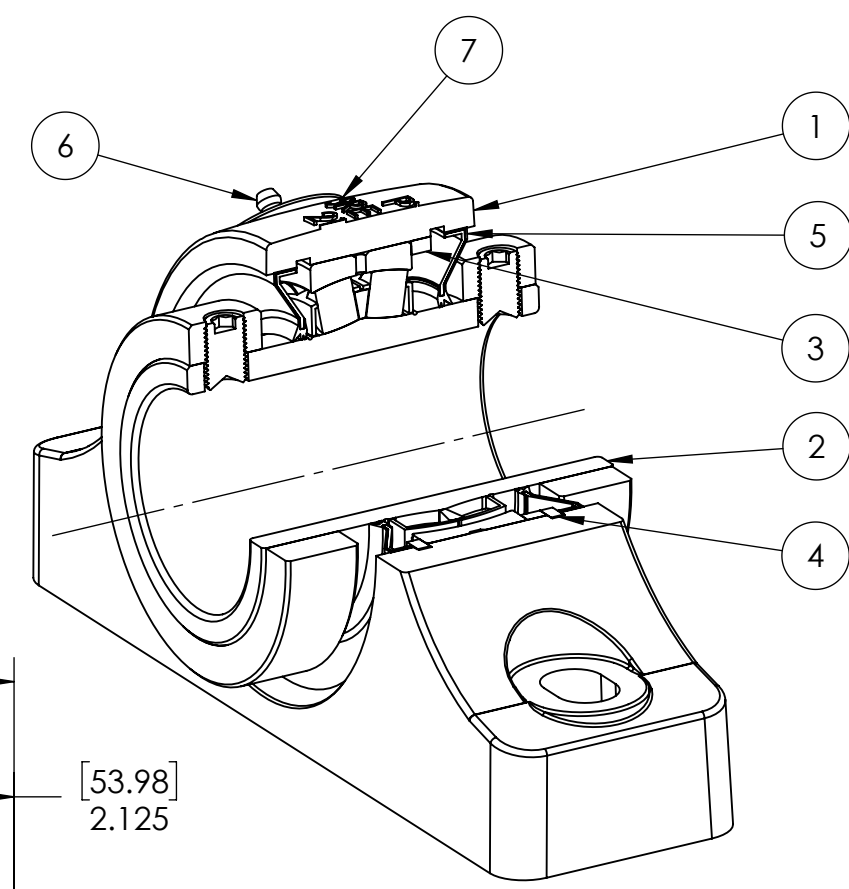
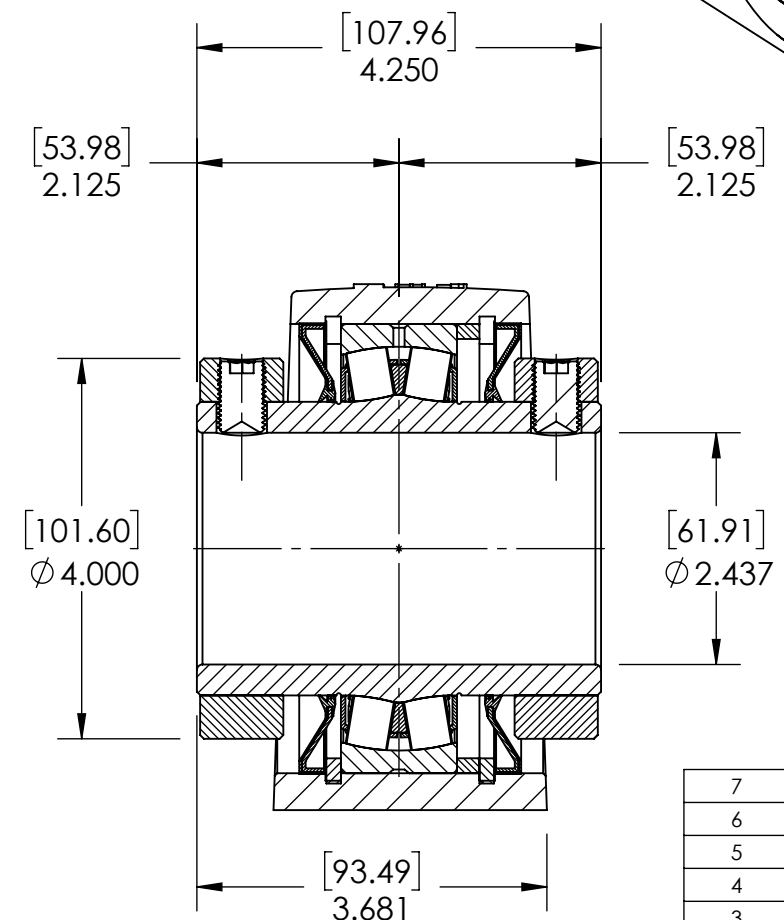
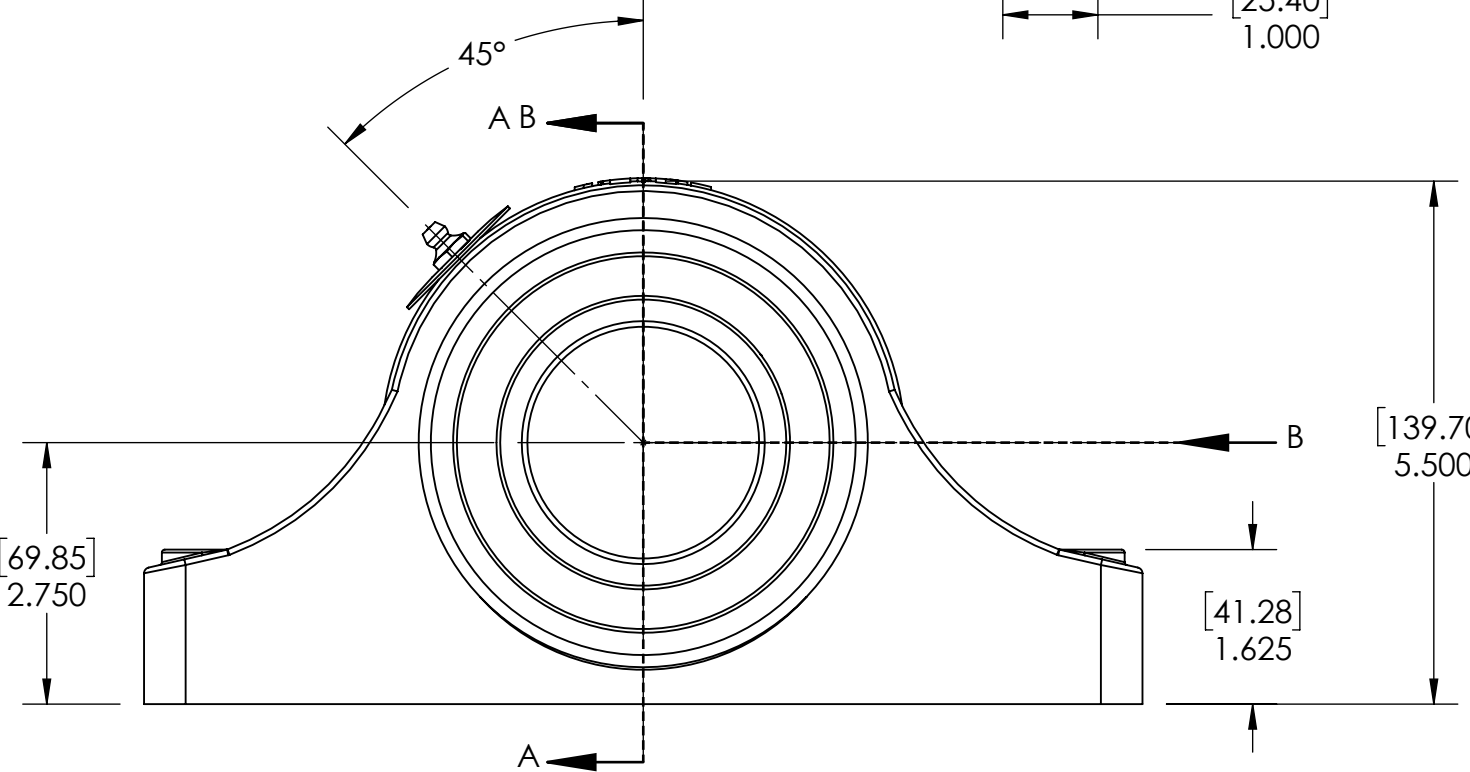
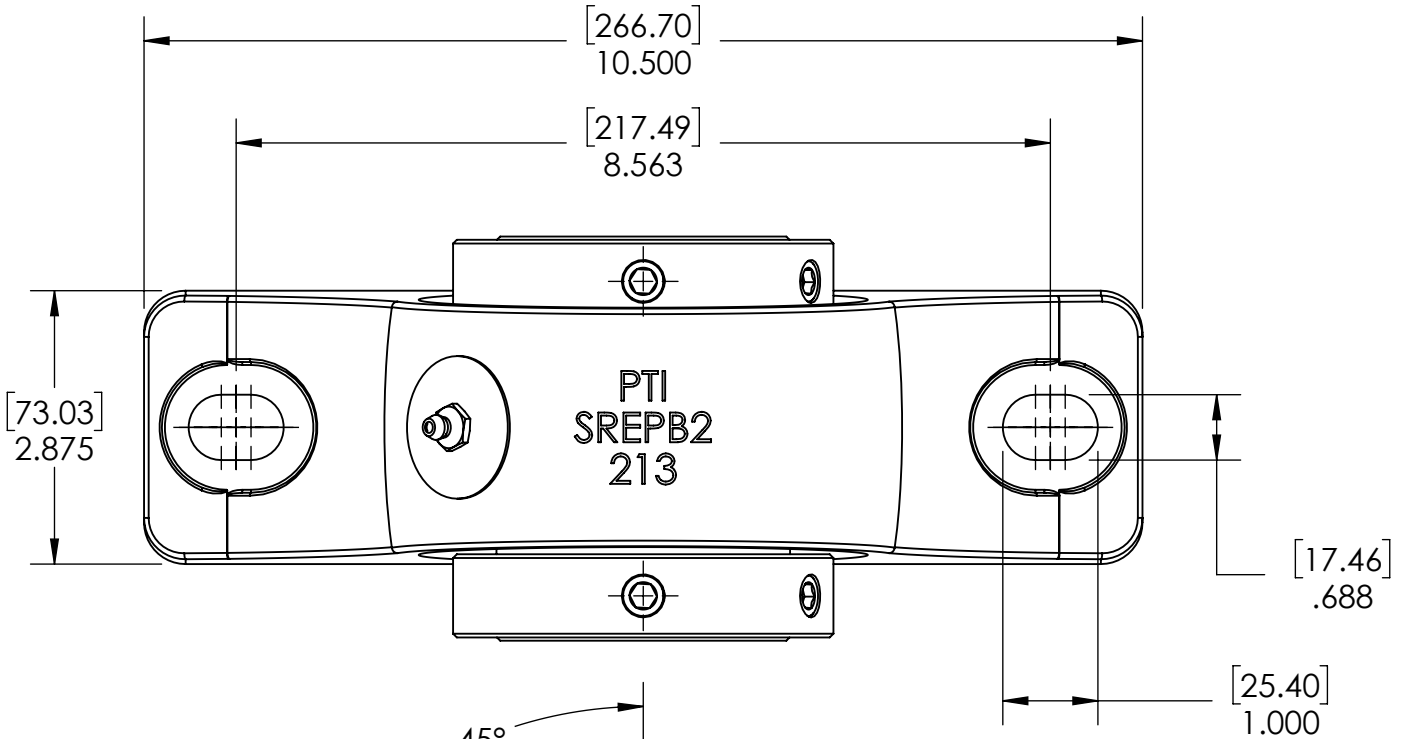


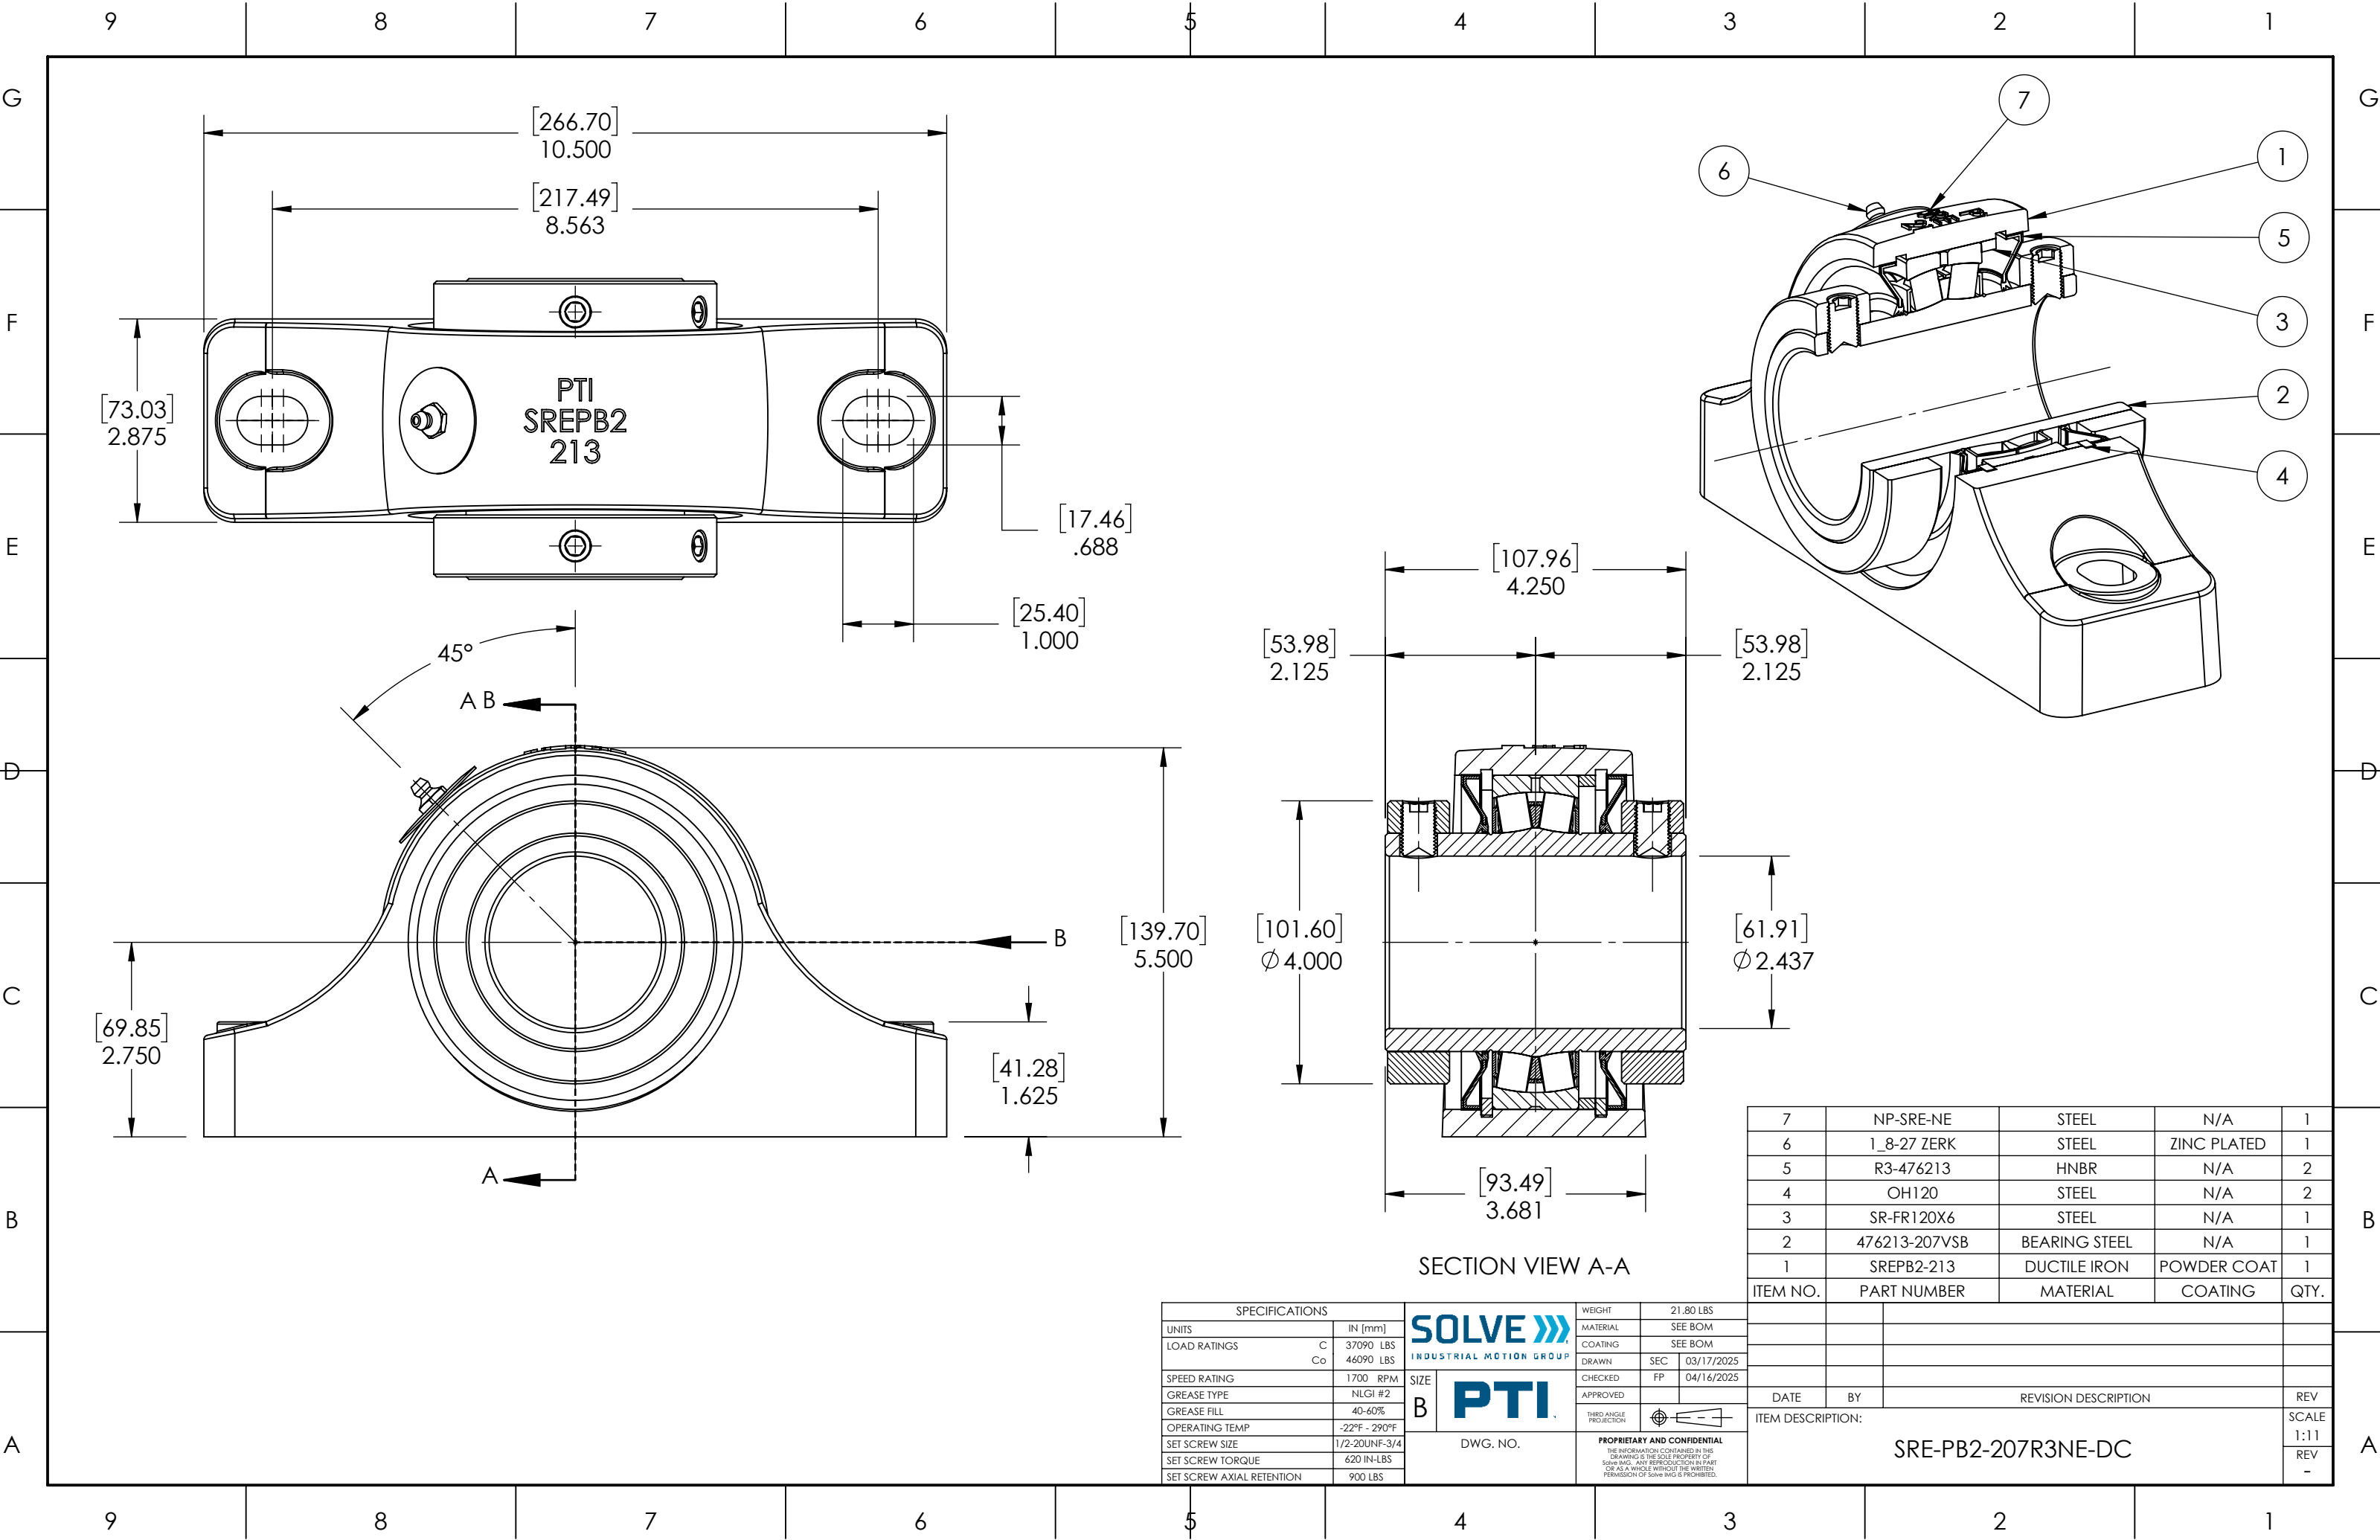

7	NP-SRE-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476213	HNBR	N/A	2
4	OH120	STEEL	N/A	2
3	SR-FR120X6	STEEL	N/A	1
2	476213-207VSB	BEARING STEEL	N/A	1
1	SREP2-213	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C 37090 LBS Co 46090 LBS	DRAWN		COATING	SEE BOM
SPEED RATING	1700 RPM	CHECKED		SEC	03/17/2025
GREASE TYPE	NLGI #2	APPROVED		FP	04/16/2025
GREASE FILL	40-60%	THIRD ANGLE PROJECTION			
OPERATING TEMP	-22°F - 290°F	DWG. NO.		PROPRIETARY AND CONFIDENTIAL	
SET SCREW SIZE	1/2-20UNF-3/4	SIZE		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS	B			
SET SCREW AXIAL RETENTION	900 LBS				

DATE	BY	REVISION DESCRIPTION	REV
		ITEM DESCRIPTION:	SCALE
		SRE-PB2-207R3NE-DC	1:11
			REV
			-