


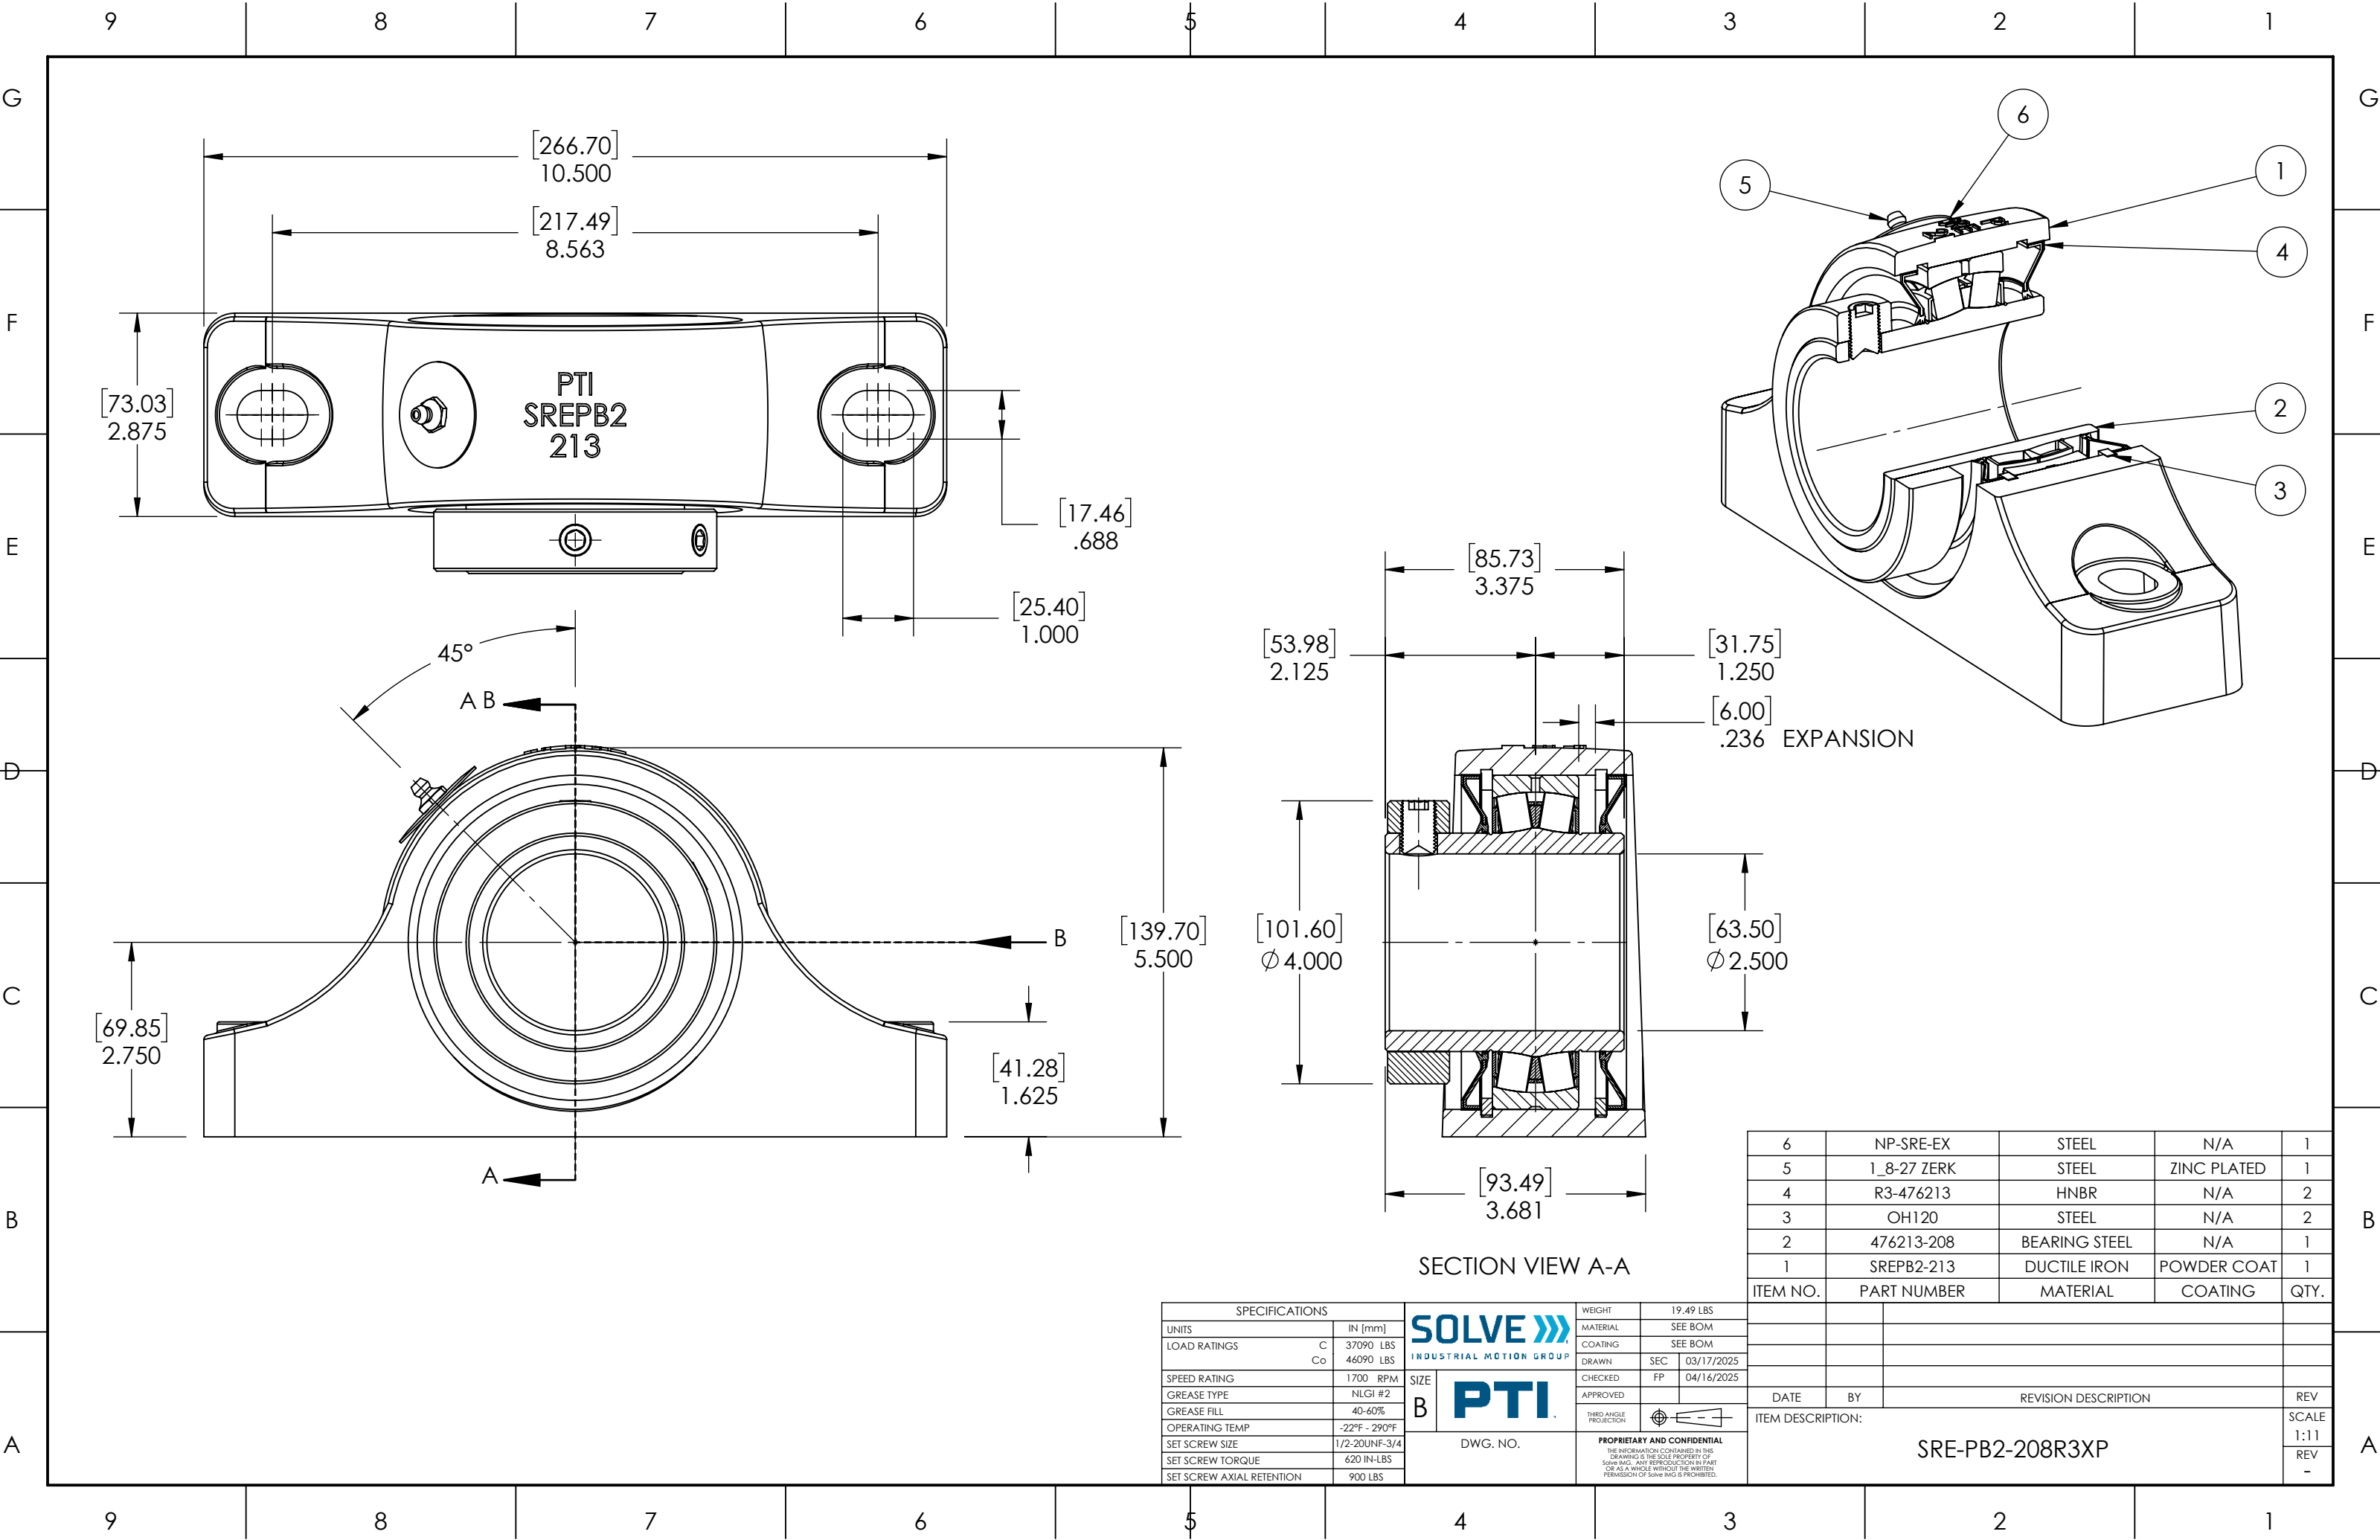

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476213	HNBR	N/A	2
3	OH120	STEEL	N/A	2
2	476213-208	BEARING STEEL	N/A	1
1	SREP2-213	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		19.49 LBS	
LOAD RATINGS	C	37090 LBS		MATERIAL	
	Co	46090 LBS		SEE BOM	
SPEED RATING		1700 RPM		COATING	
GREASE TYPE		NLGI #2		DRAWN	
GREASE FILL		40-60%		SEC	
OPERATING TEMP		-22°F - 290°F		CHECKED	
SET SCREW SIZE		1/2-20UNF-3/4		FP	
SET SCREW TORQUE		620 IN-LBS		APPROVED	
SET SCREW AXIAL RETENTION		900 LBS		THIRD ANGLE PROJECTION	
SIZE		B		DWG. NO.	
B		PTI		PROPRIETARY AND CONFIDENTIAL	
				THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-PB2-208R3XP			1:1
			REV
			-