


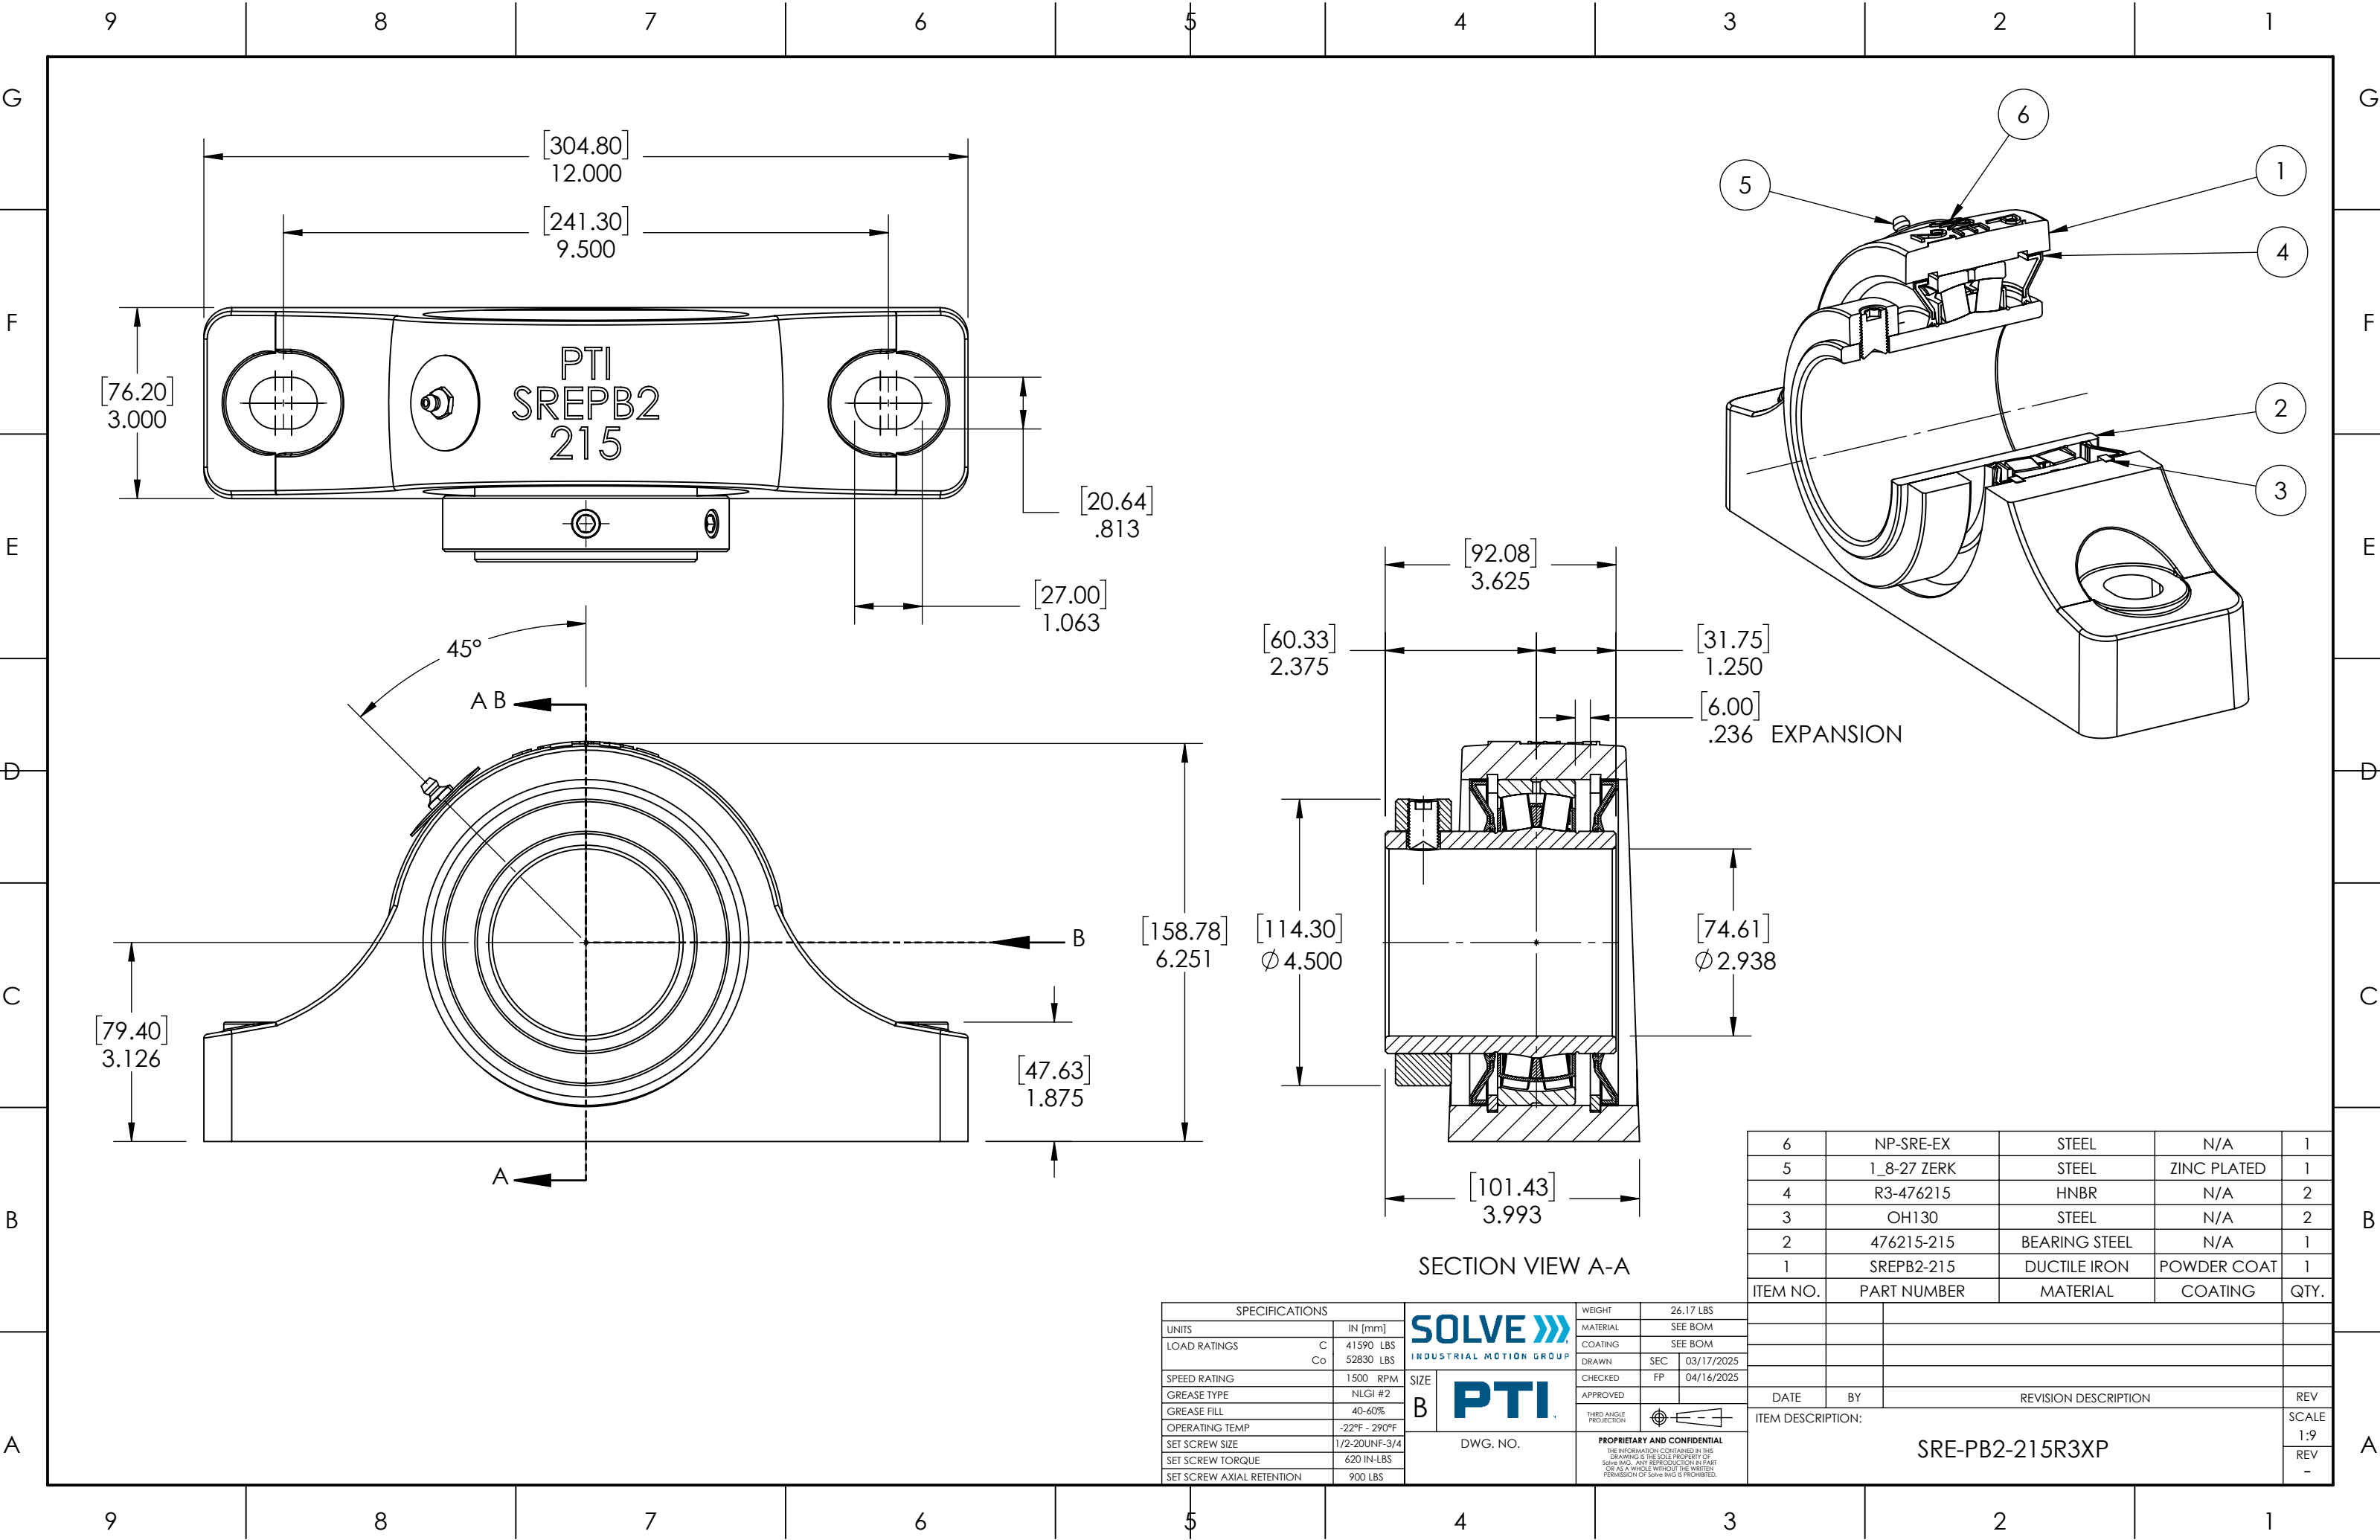

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-215	BEARING STEEL	N/A	1
1	SREP2-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE		WEIGHT	26.17 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co	PTI		COATING	SEE BOM
SPEED RATING	1500 RPM	DWG. NO.		DRAWN	SEC 03/17/2025
GREASE TYPE	NLGI #2	B		CHECKED	FP 04/16/2025
GREASE FILL	40-60%	APPROVED		THIRD ANGLE PROJECTION	
OPERATING TEMP	-22°F - 290°F	DWG. NO.		PROPRIETARY AND CONFIDENTIAL	
SET SCREW SIZE	1/2-20UNF-3/4	DWG. NO.		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS	DWG. NO.		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW AXIAL RETENTION	900 LBS	DWG. NO.		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	

DATE	BY	REVISION DESCRIPTION	REV
		SRE-PB2-215R3XP	1:9
			REV