


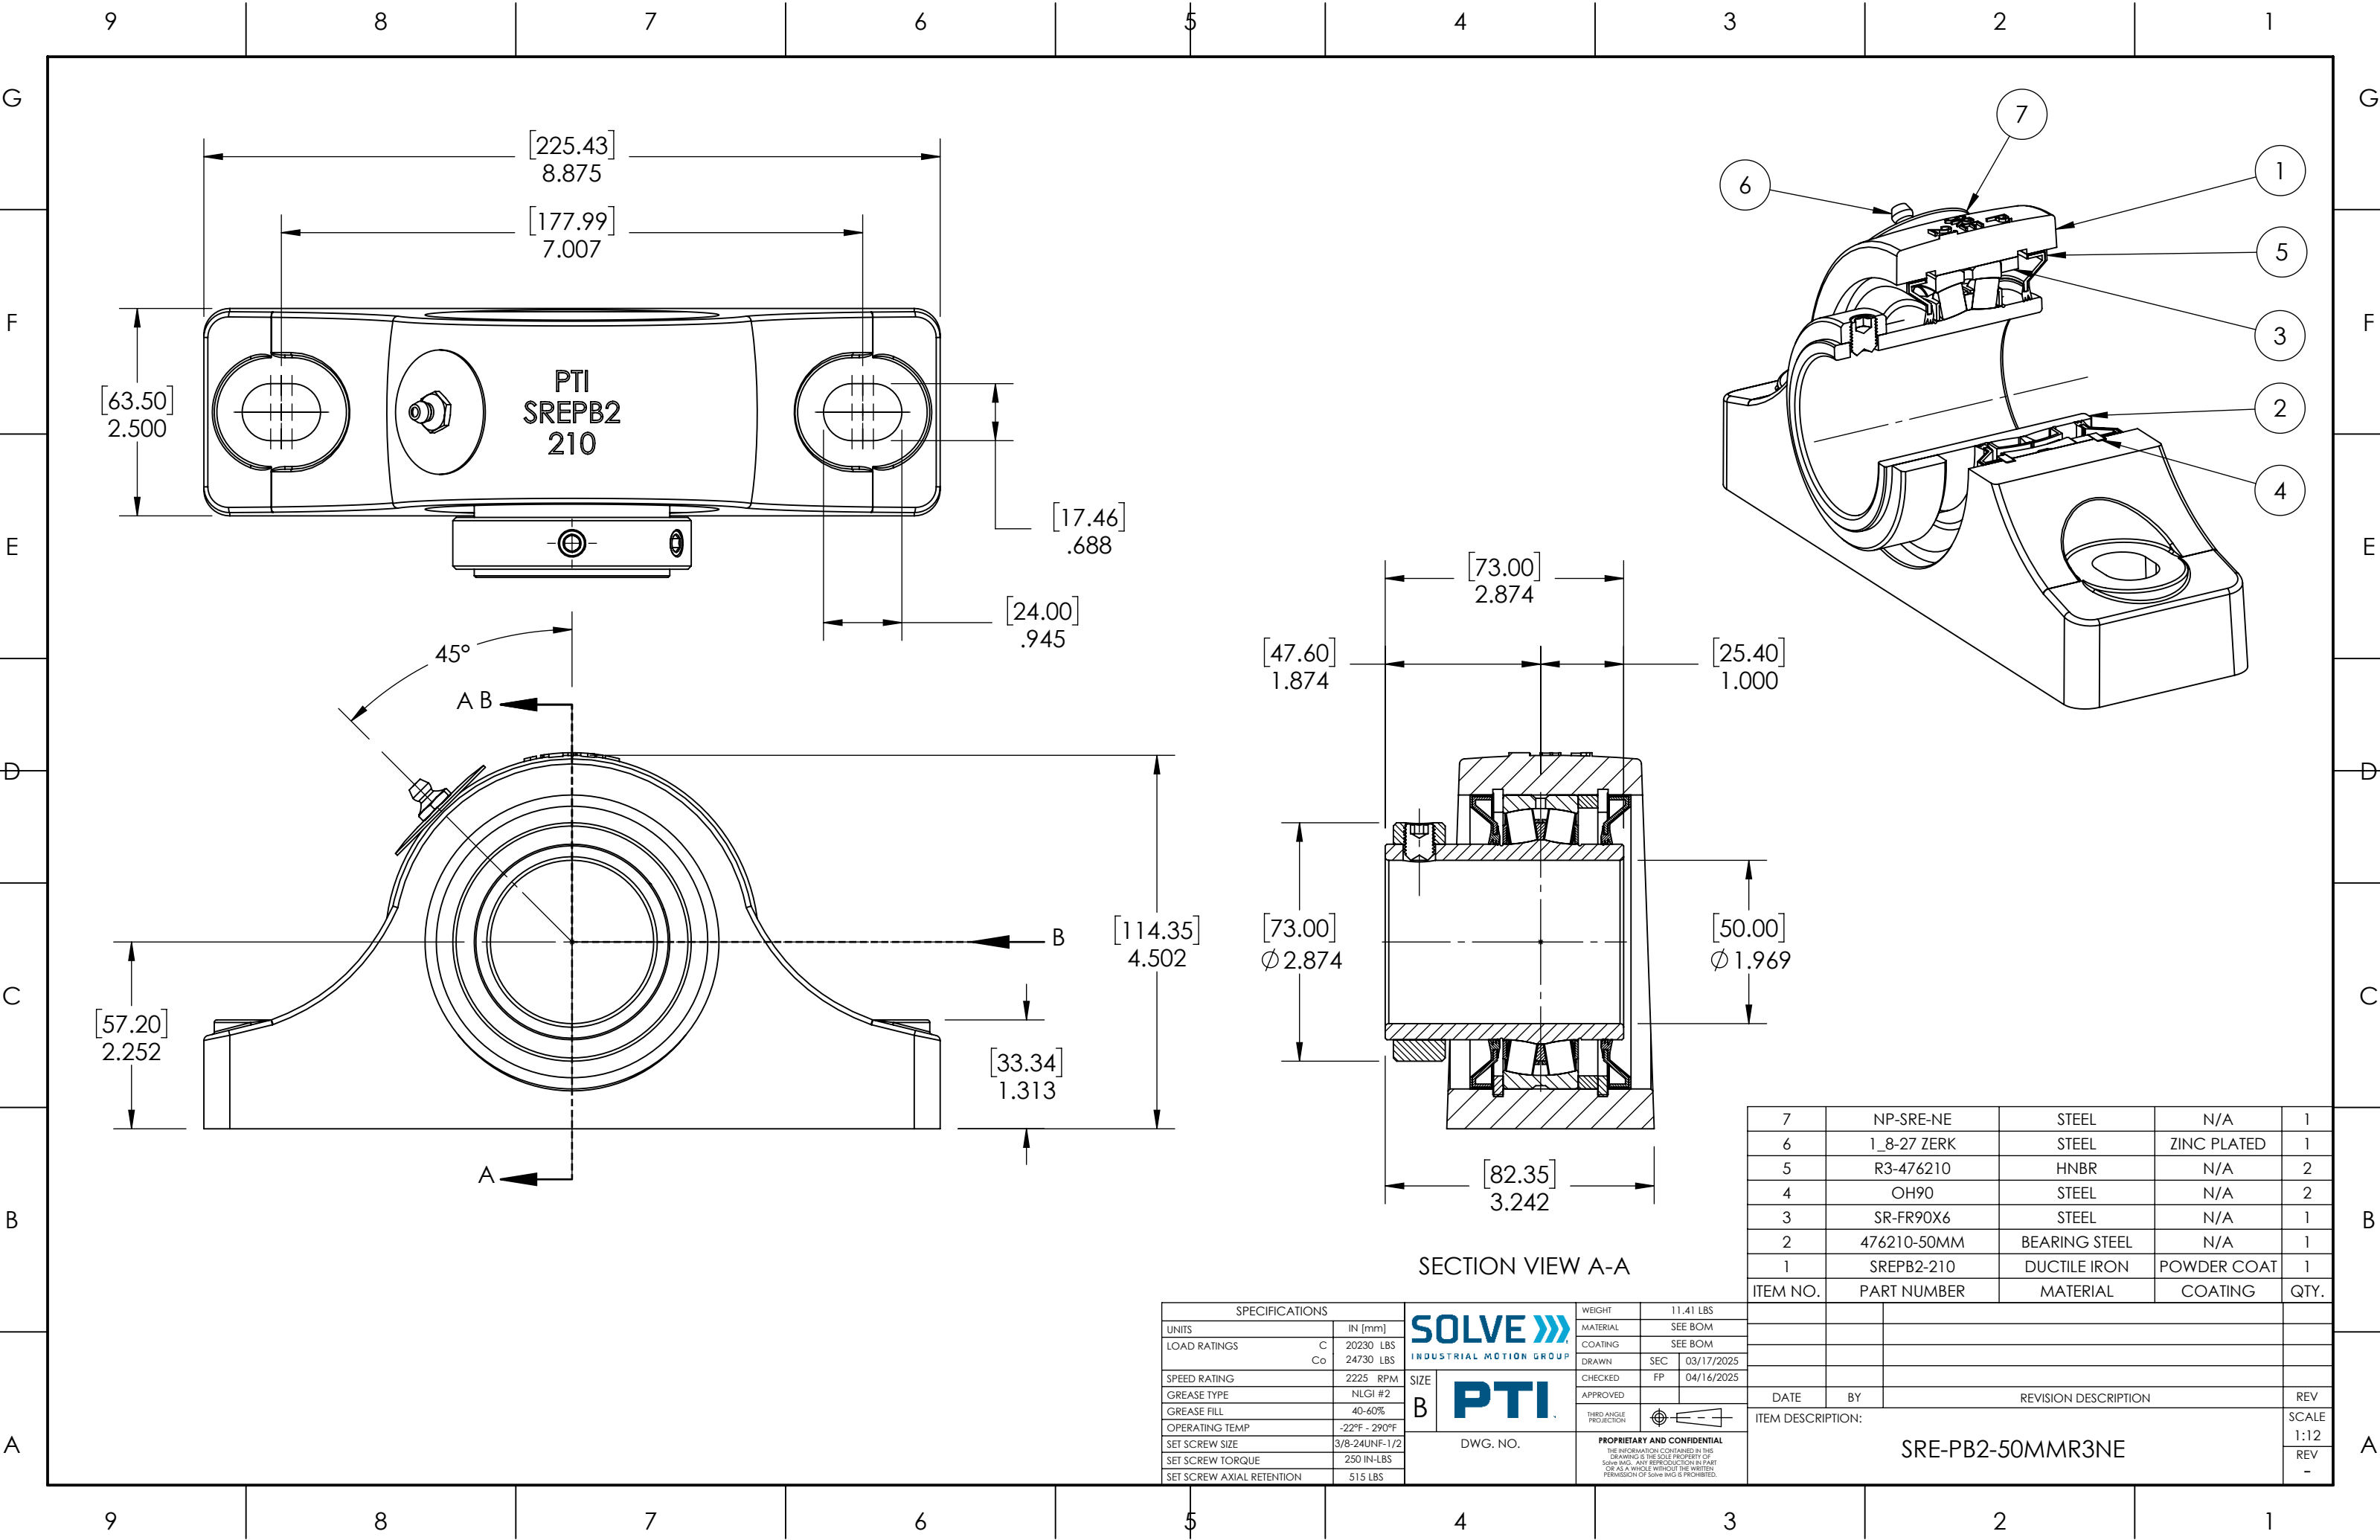

SECTION VIEW A-A

7	NP-SRE-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476210	HNBR	N/A	2
4	OH90	STEEL	N/A	2
3	SR-FR90X6	STEEL	N/A	1
2	476210-50MM	BEARING STEEL	N/A	1
1	SREP2-210	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	
UNITS	IN [mm]	20230 LBS		SEE BOM	
LOAD RATINGS	C Co	24730 LBS		SEE BOM	
SPEED RATING		2225 RPM		DRAWN	
GREASE TYPE		NLGI #2		SEC	
GREASE FILL		40-60%		FP	
OPERATING TEMP		-22°F - 290°F		CHECKED	
SET SCREW SIZE		3/8-24UNF-1/2		APPROVED	
SET SCREW TORQUE		250 IN-LBS		THIRD ANGLE PROJECTION	
SET SCREW AXIAL RETENTION		515 LBS		DWG. NO.	

DATE		BY		REVISION DESCRIPTION		REV	
ITEM DESCRIPTION:		SRE-PB2-50MMR3NE		SCALE		1:12	
						REV	