

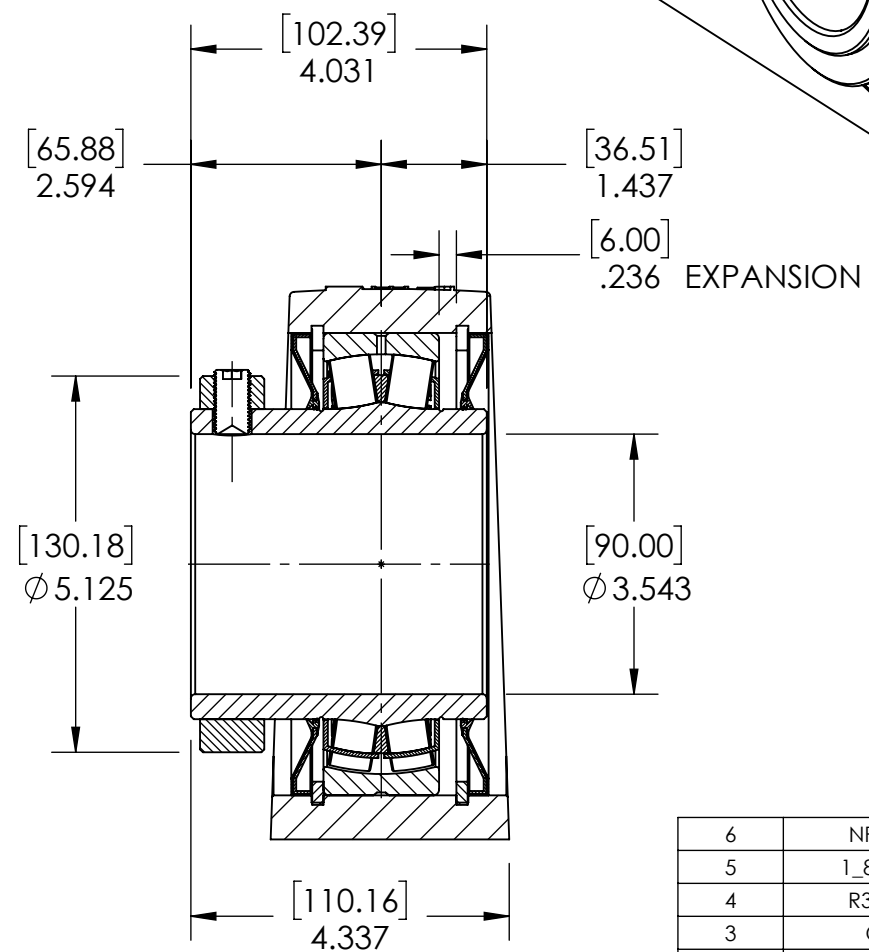
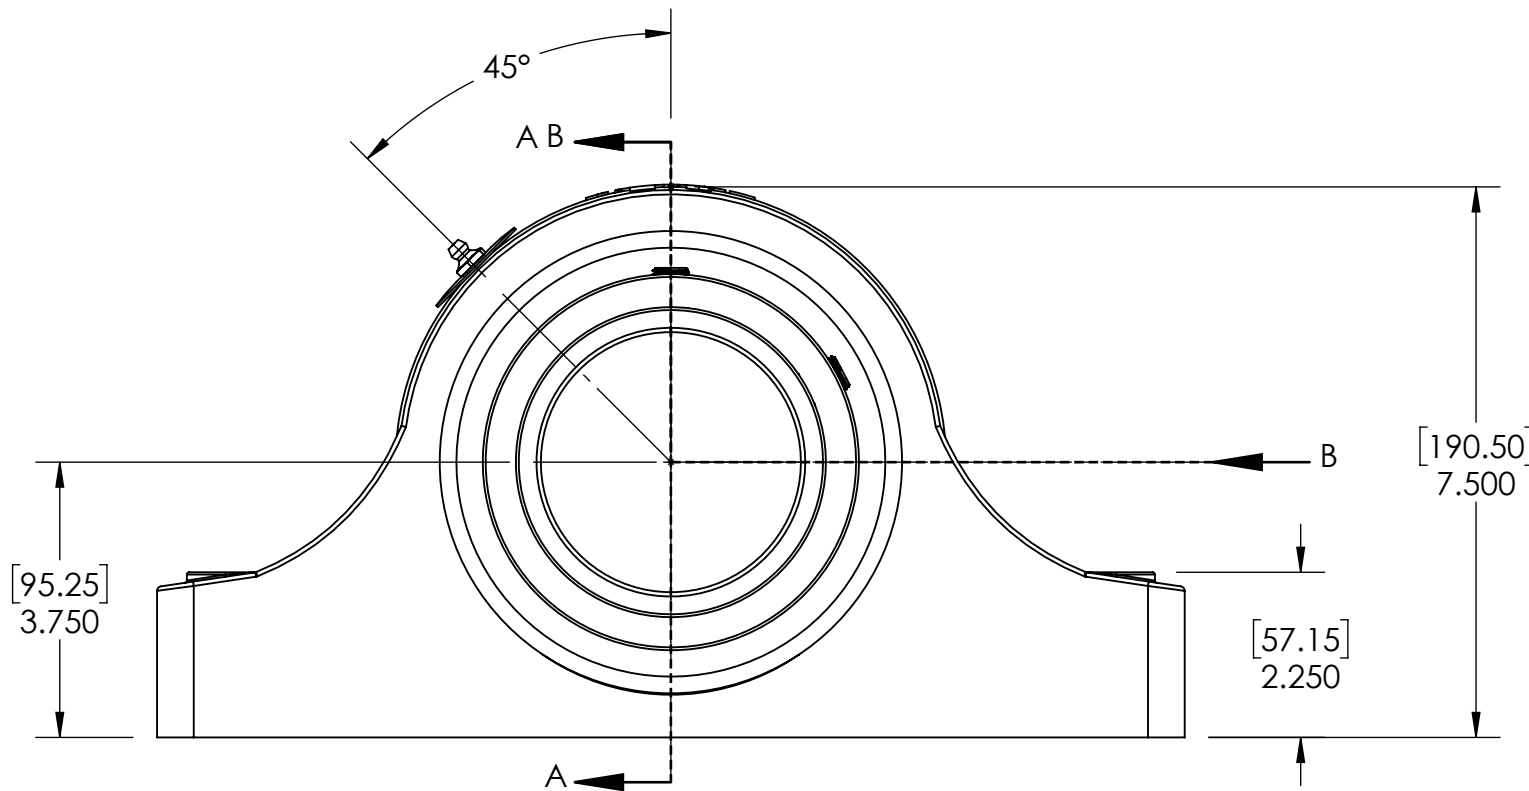


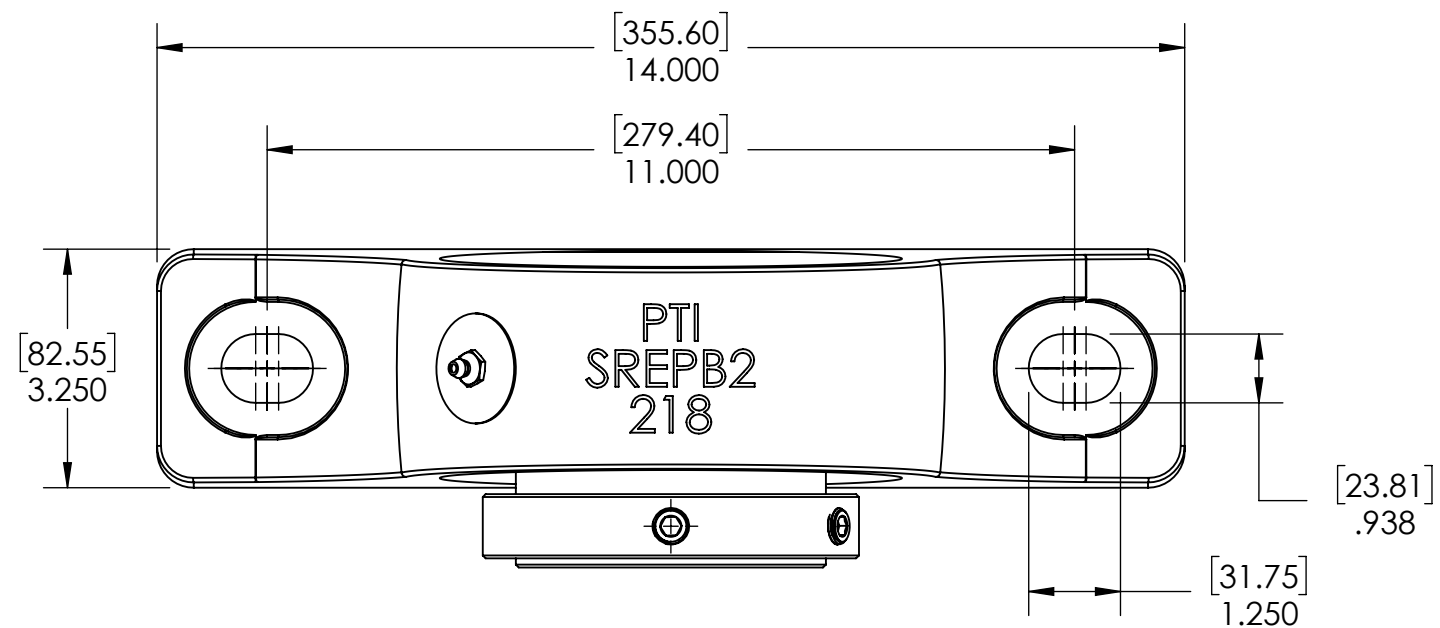

SECTION VIEW A-A

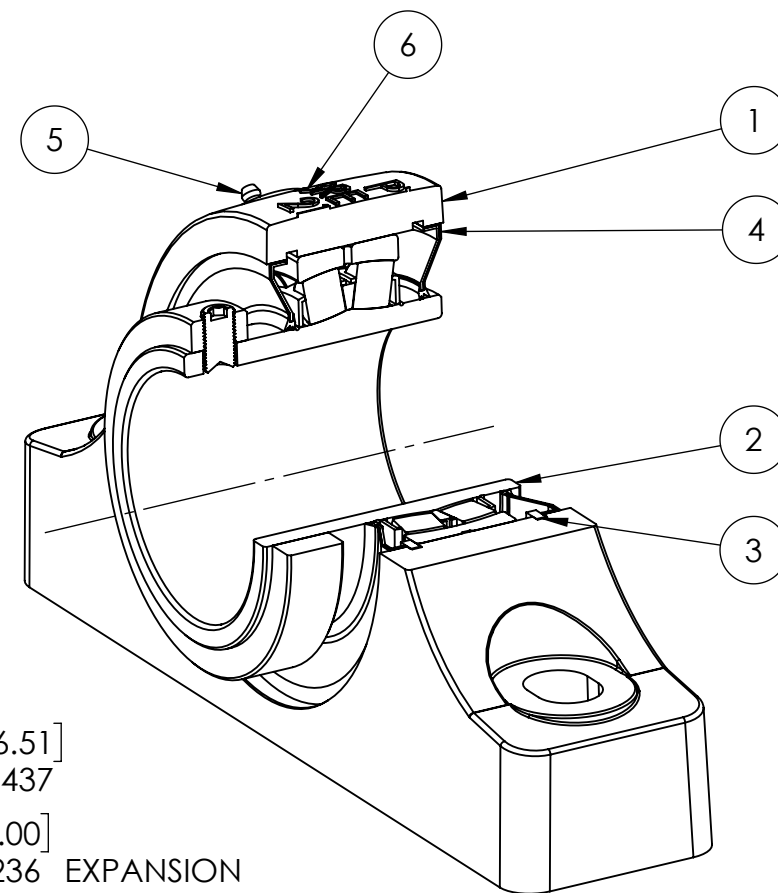

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476218	HNBR	N/A	2
3	OH160	STEEL	N/A	2
2	476218-90MM	BEARING STEEL	N/A	1
1	SREPB2-218	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS			SOLVE INDUSTRIAL MOTION GROUP		WEIGHT		39.06 LBS	
UNITS	IN [mm]				MATERIAL	SEE BOM		
LOAD RATINGS	C	62950 LBS	SIZE	PTI	COATING	SEE BOM		
	Co	83180 LBS			DRAWN	SEC	03/17/20	
SPEED RATING	1250 RPM				CHECKED	FP	04/16/20	
GREASE TYPE	NLGI #2				APPROVED	THIRD ANGLE PROJECTION 		
GREASE FILL	40-60%							
OPERATING TEMP	-22°F - 290°F							
SET SCREW SIZE	1/2-20UNF-7/8		DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE MFG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE MFG IS PROHIBITED.			
SET SCREW TORQUE	620 IN-LBS							
SET SCREW AXIAL RETENTION	900 LBS							

REVISION	DATE	BY	REVISION DESCRIPTION	REV
25				
25				
	DATE	BY	REVISION DESCRIPTION	REV
-	ITEM DESCRIPTION:			SCALE
	SRE-PB2-90MMR3XP			1:8
				REV
				-