


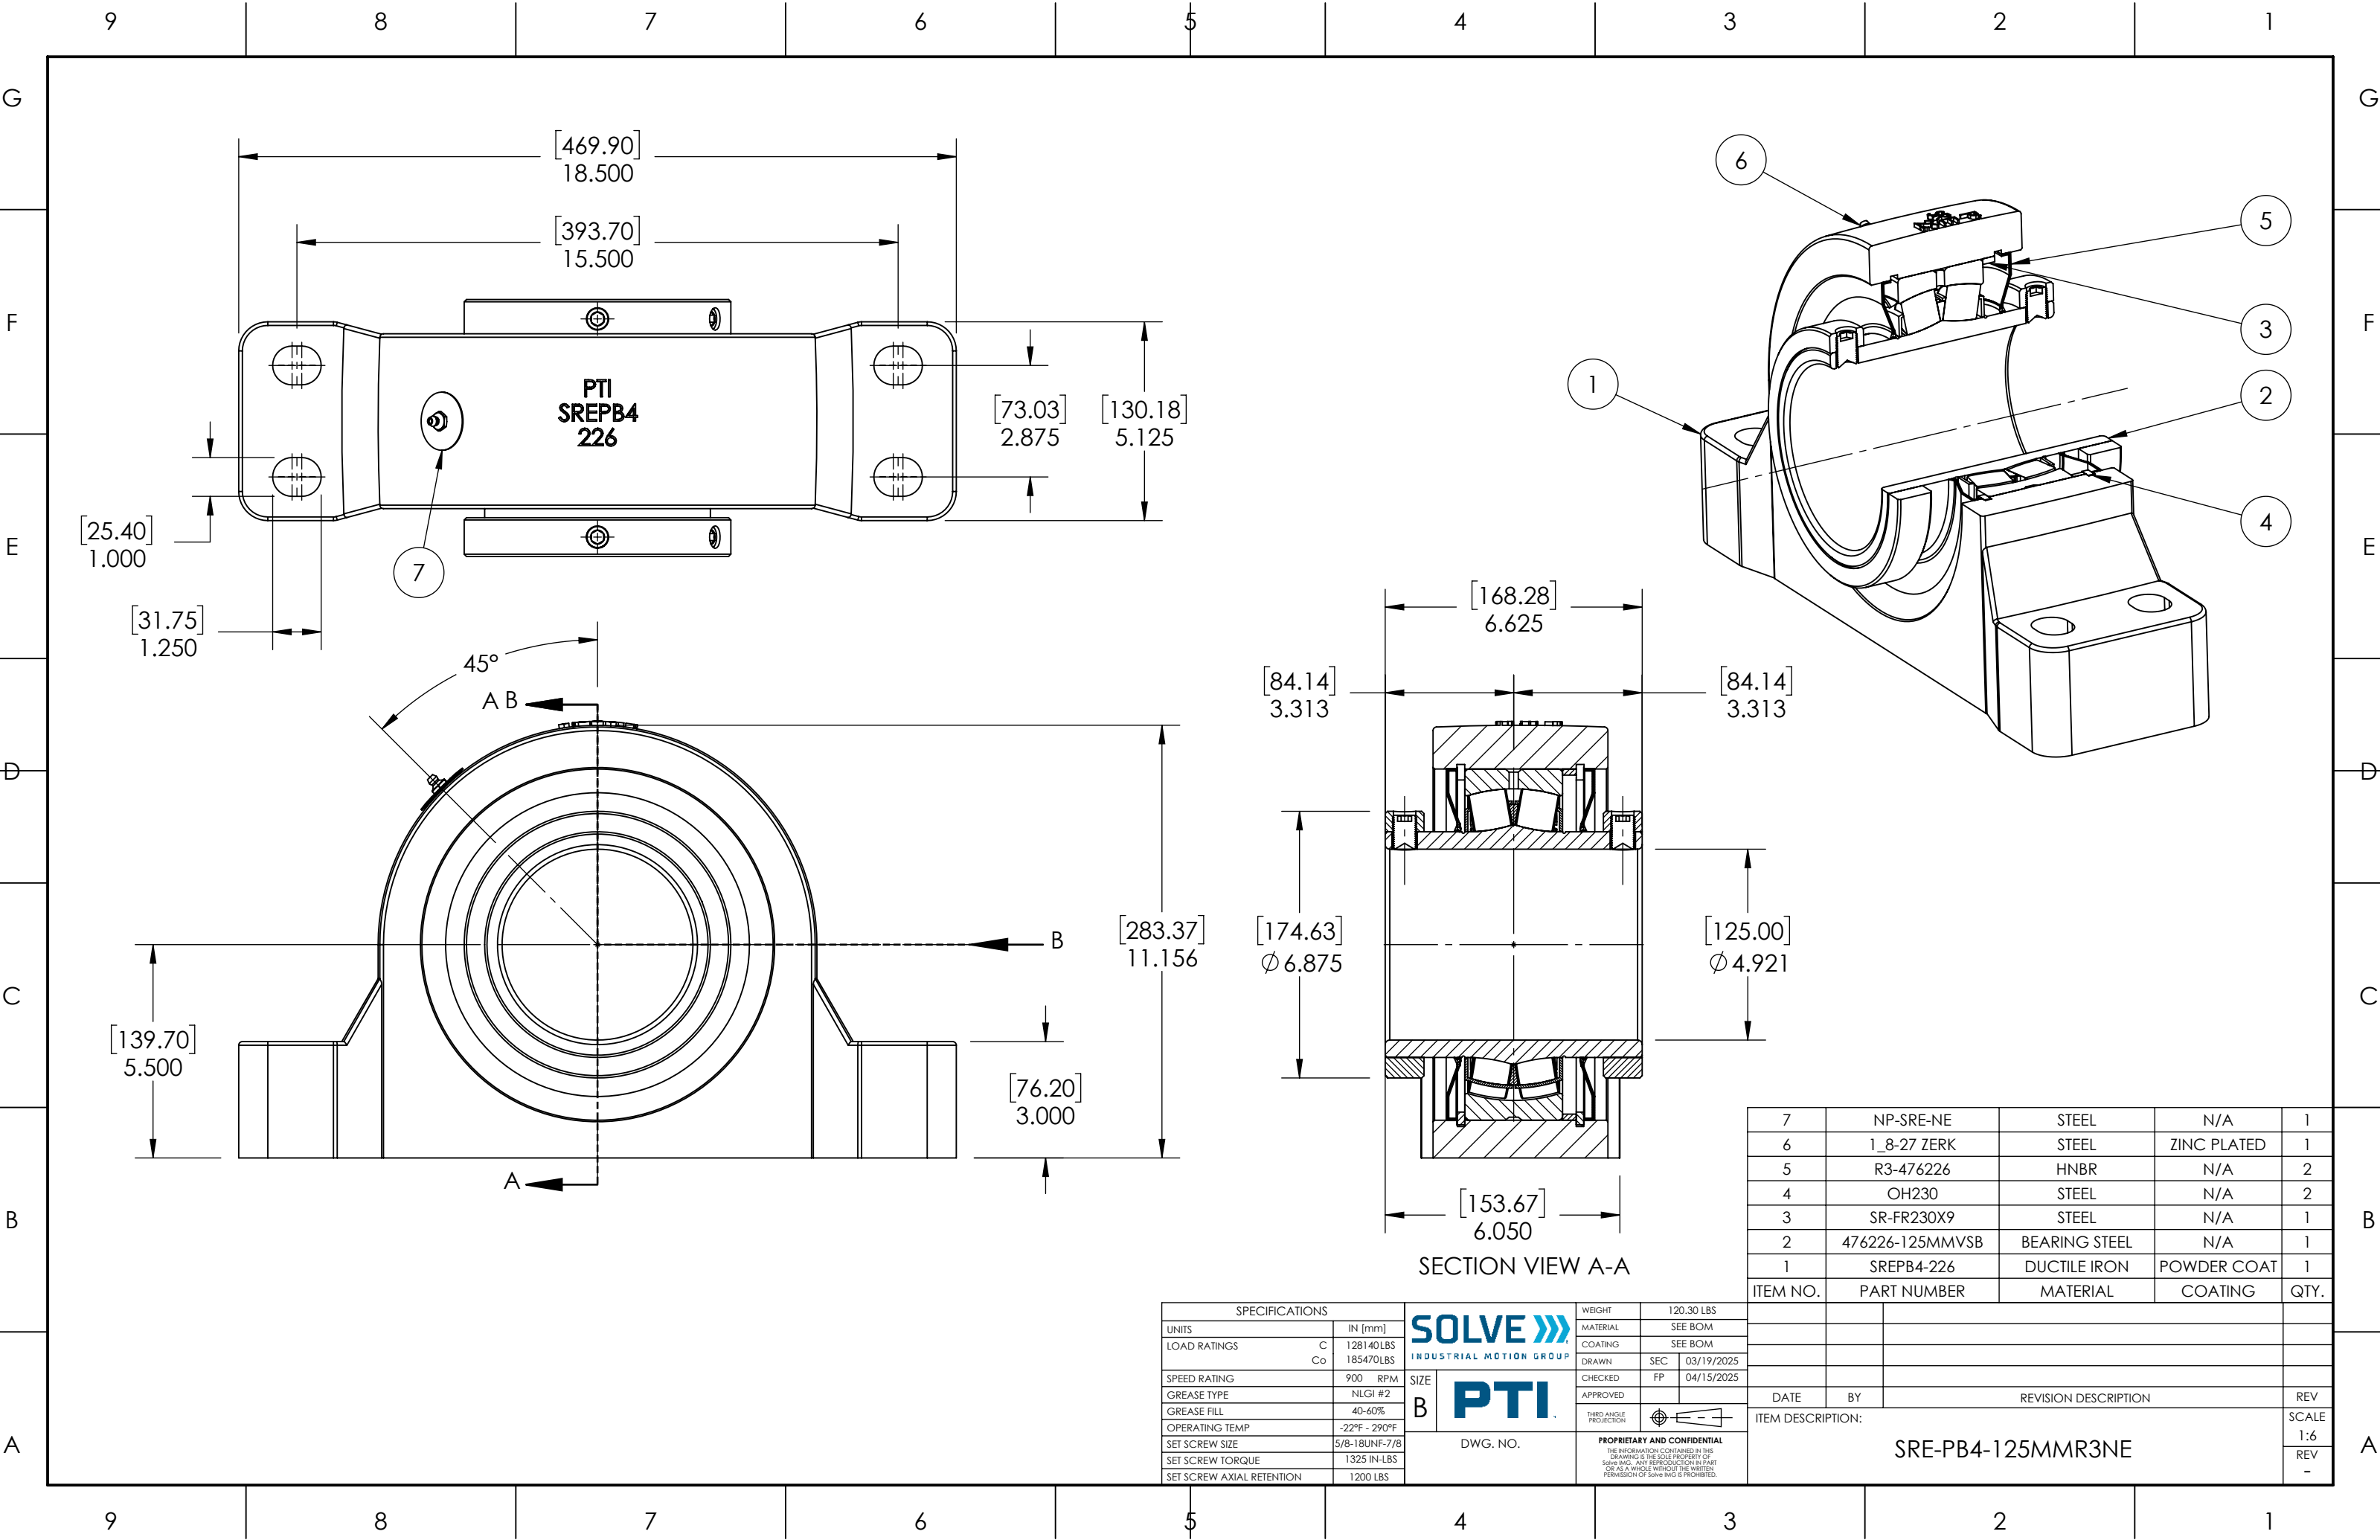

7	NP-SRE-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476226	HNBR	N/A	2
4	OH230	STEEL	N/A	2
3	SR-FR230X9	STEEL	N/A	1
2	476226-125MMVSB	BEARING STEEL	N/A	1
1	SREP4-226	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT		120.30 LBS	
UNITS	IN [mm]	MATERIAL		SEE BOM			
LOAD RATINGS	C Co	COATING		SEE BOM			
SPEED RATING	900 RPM	DRAWN		SEC 03/19/2025			
GREASE TYPE	NLGI #2	CHECKED		FP 04/15/2025			
GREASE FILL	40-60%	APPROVED					
OPERATING TEMP	-22°F - 290°F	THIRD ANGLE PROJECTION					
SET SCREW SIZE	5/8-18UNF-7/8	DWG. NO.		PROPRIETARY AND CONFIDENTIAL			
SET SCREW TORQUE	1325 IN-LBS			THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
SET SCREW AXIAL RETENTION	1200 LBS						

DATE	BY	REVISION DESCRIPTION	REV
		ITEM DESCRIPTION:	SCALE
		SRE-PB4-125MMR3NE	1:6
			REV
			-