


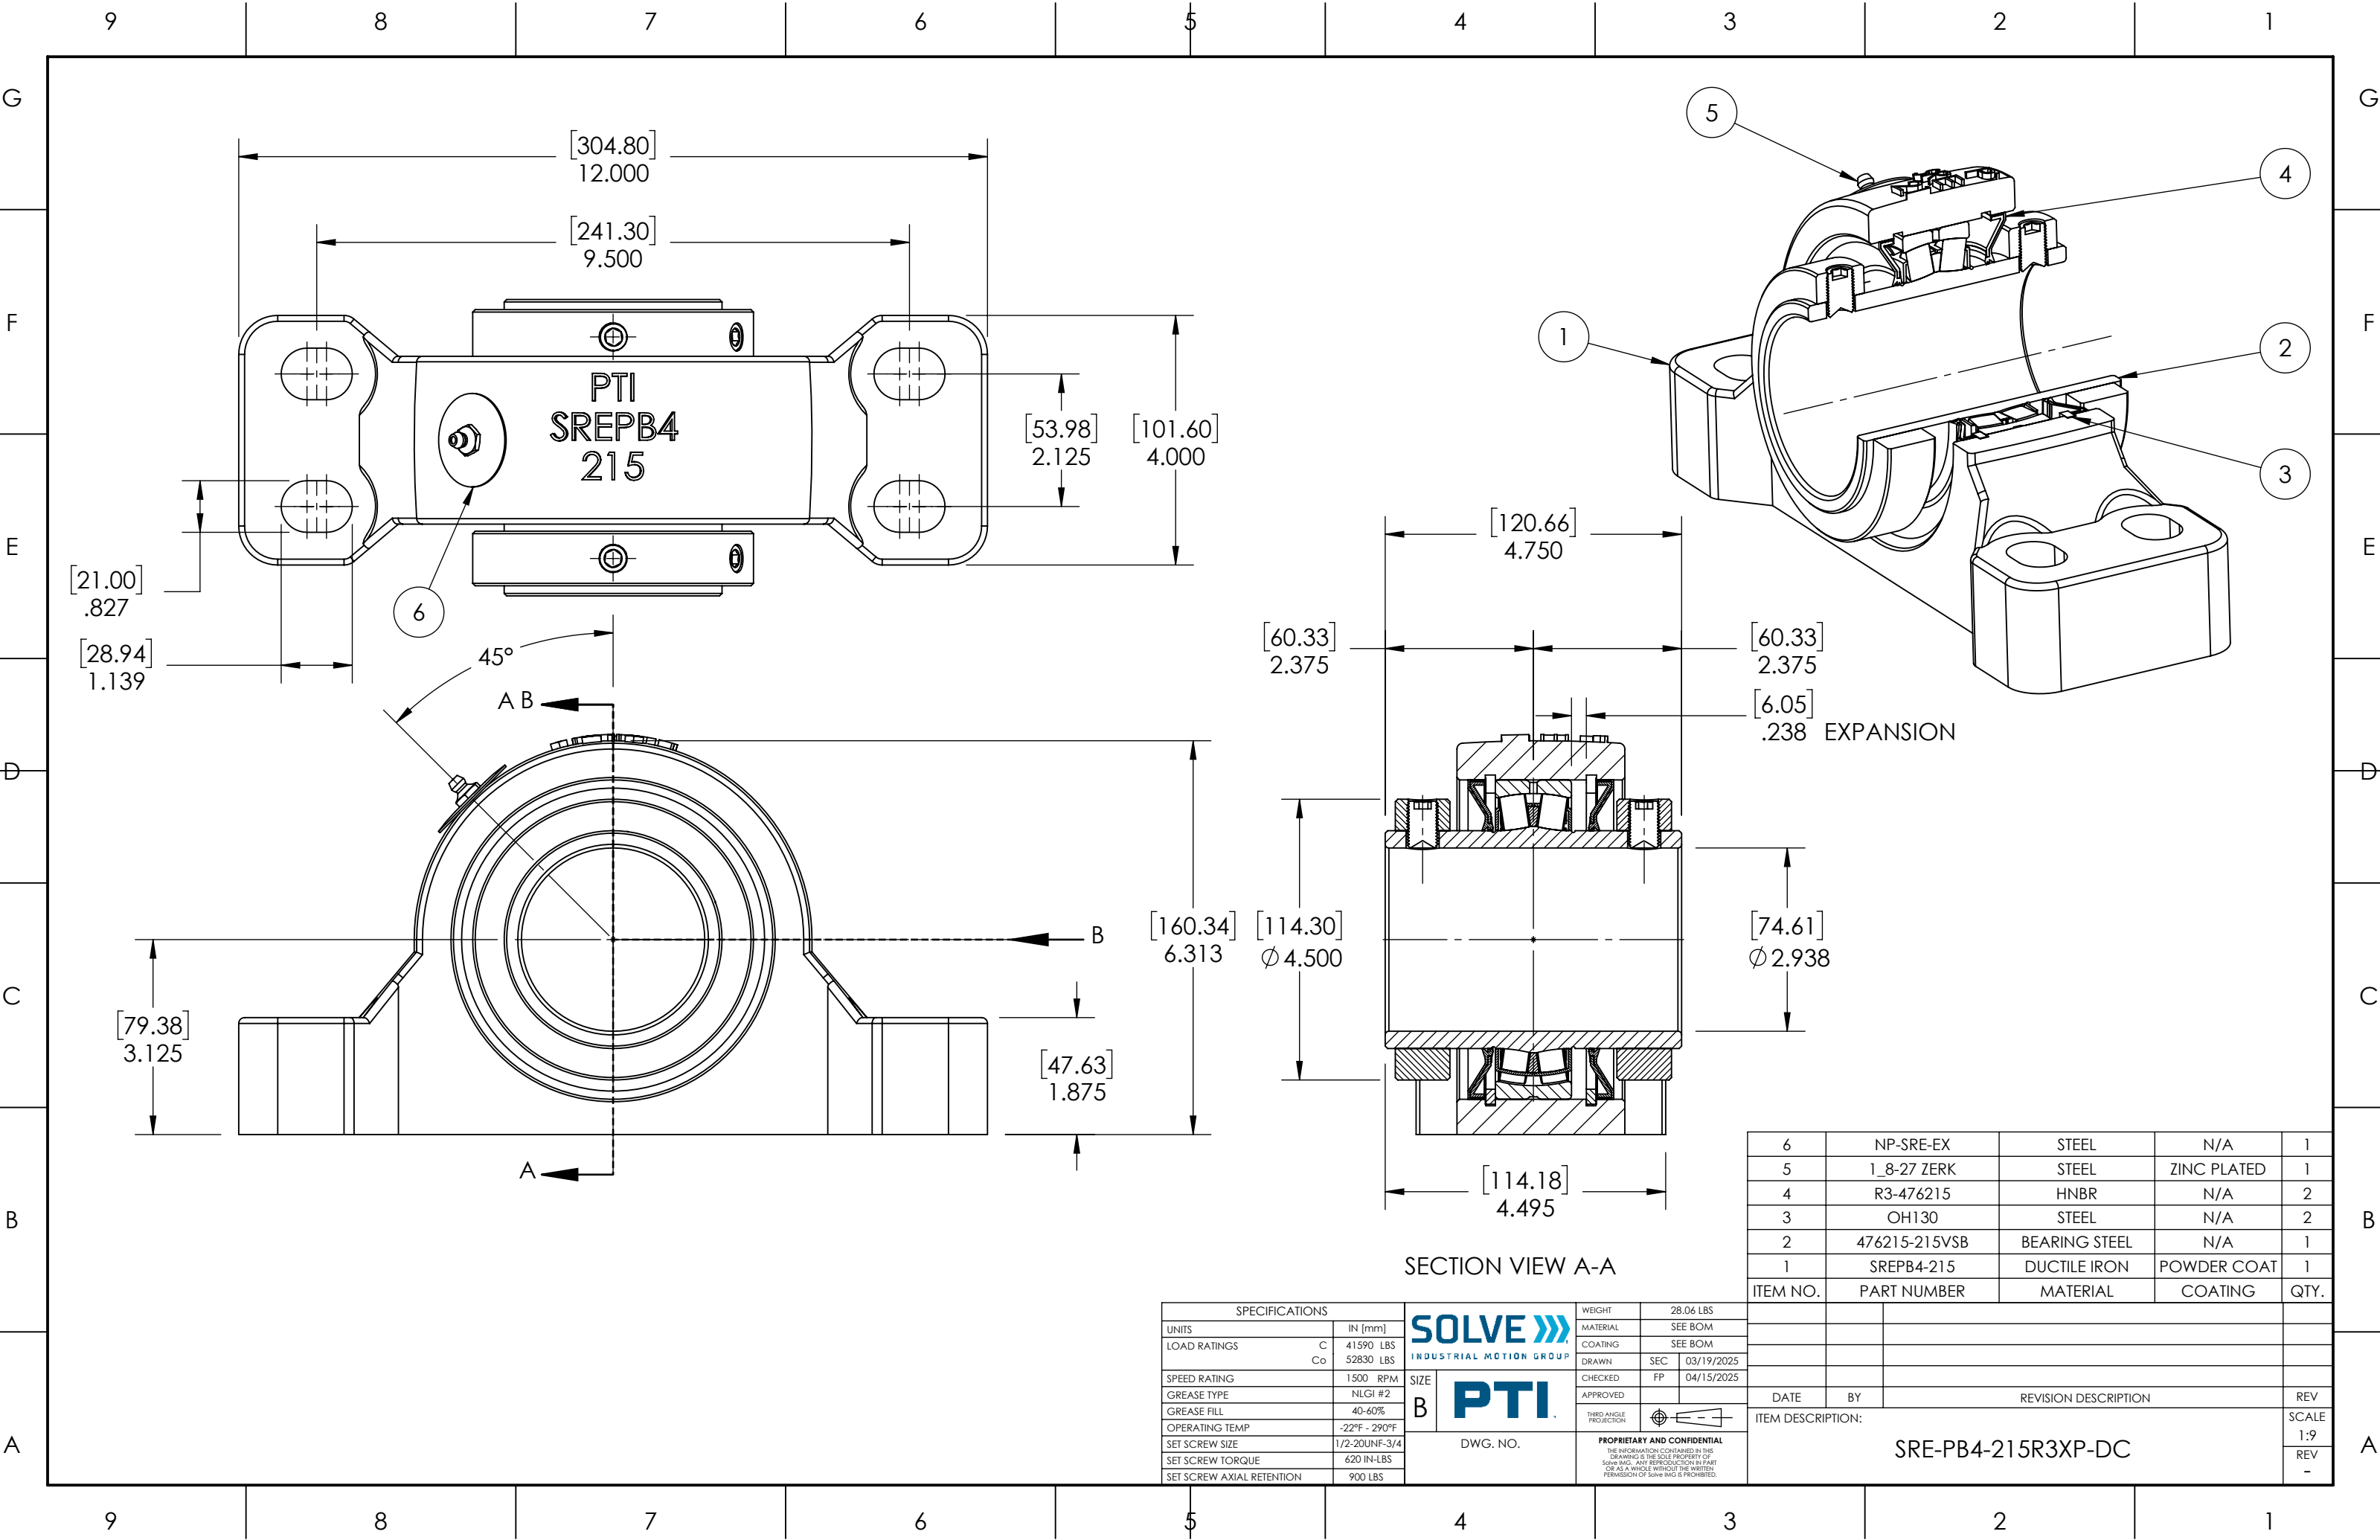

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476215	HNBR	N/A	2
3	OH130	STEEL	N/A	2
2	476215-215VSB	BEARING STEEL	N/A	1
1	SREP4-215	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	28.06 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C 41590 LBS Co 52830 LBS			COATING	SEE BOM
SPEED RATING	1500 RPM	SIZE	B	DRAWN	SEC 03/19/2025
GREASE TYPE	NLGI #2	PTI		CHECKED	FP 04/15/2025
GREASE FILL	40-60%			APPROVED	
OPERATING TEMP	-22°F - 290°F	DWG. NO.		THIRD ANGLE PROJECTION	
SET SCREW SIZE	1/2-20UNF-3/4			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	
SET SCREW TORQUE	620 IN-LBS				
SET SCREW AXIAL RETENTION	900 LBS				

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-PB4-215R3XP-DC			1:9
			REV
			-