
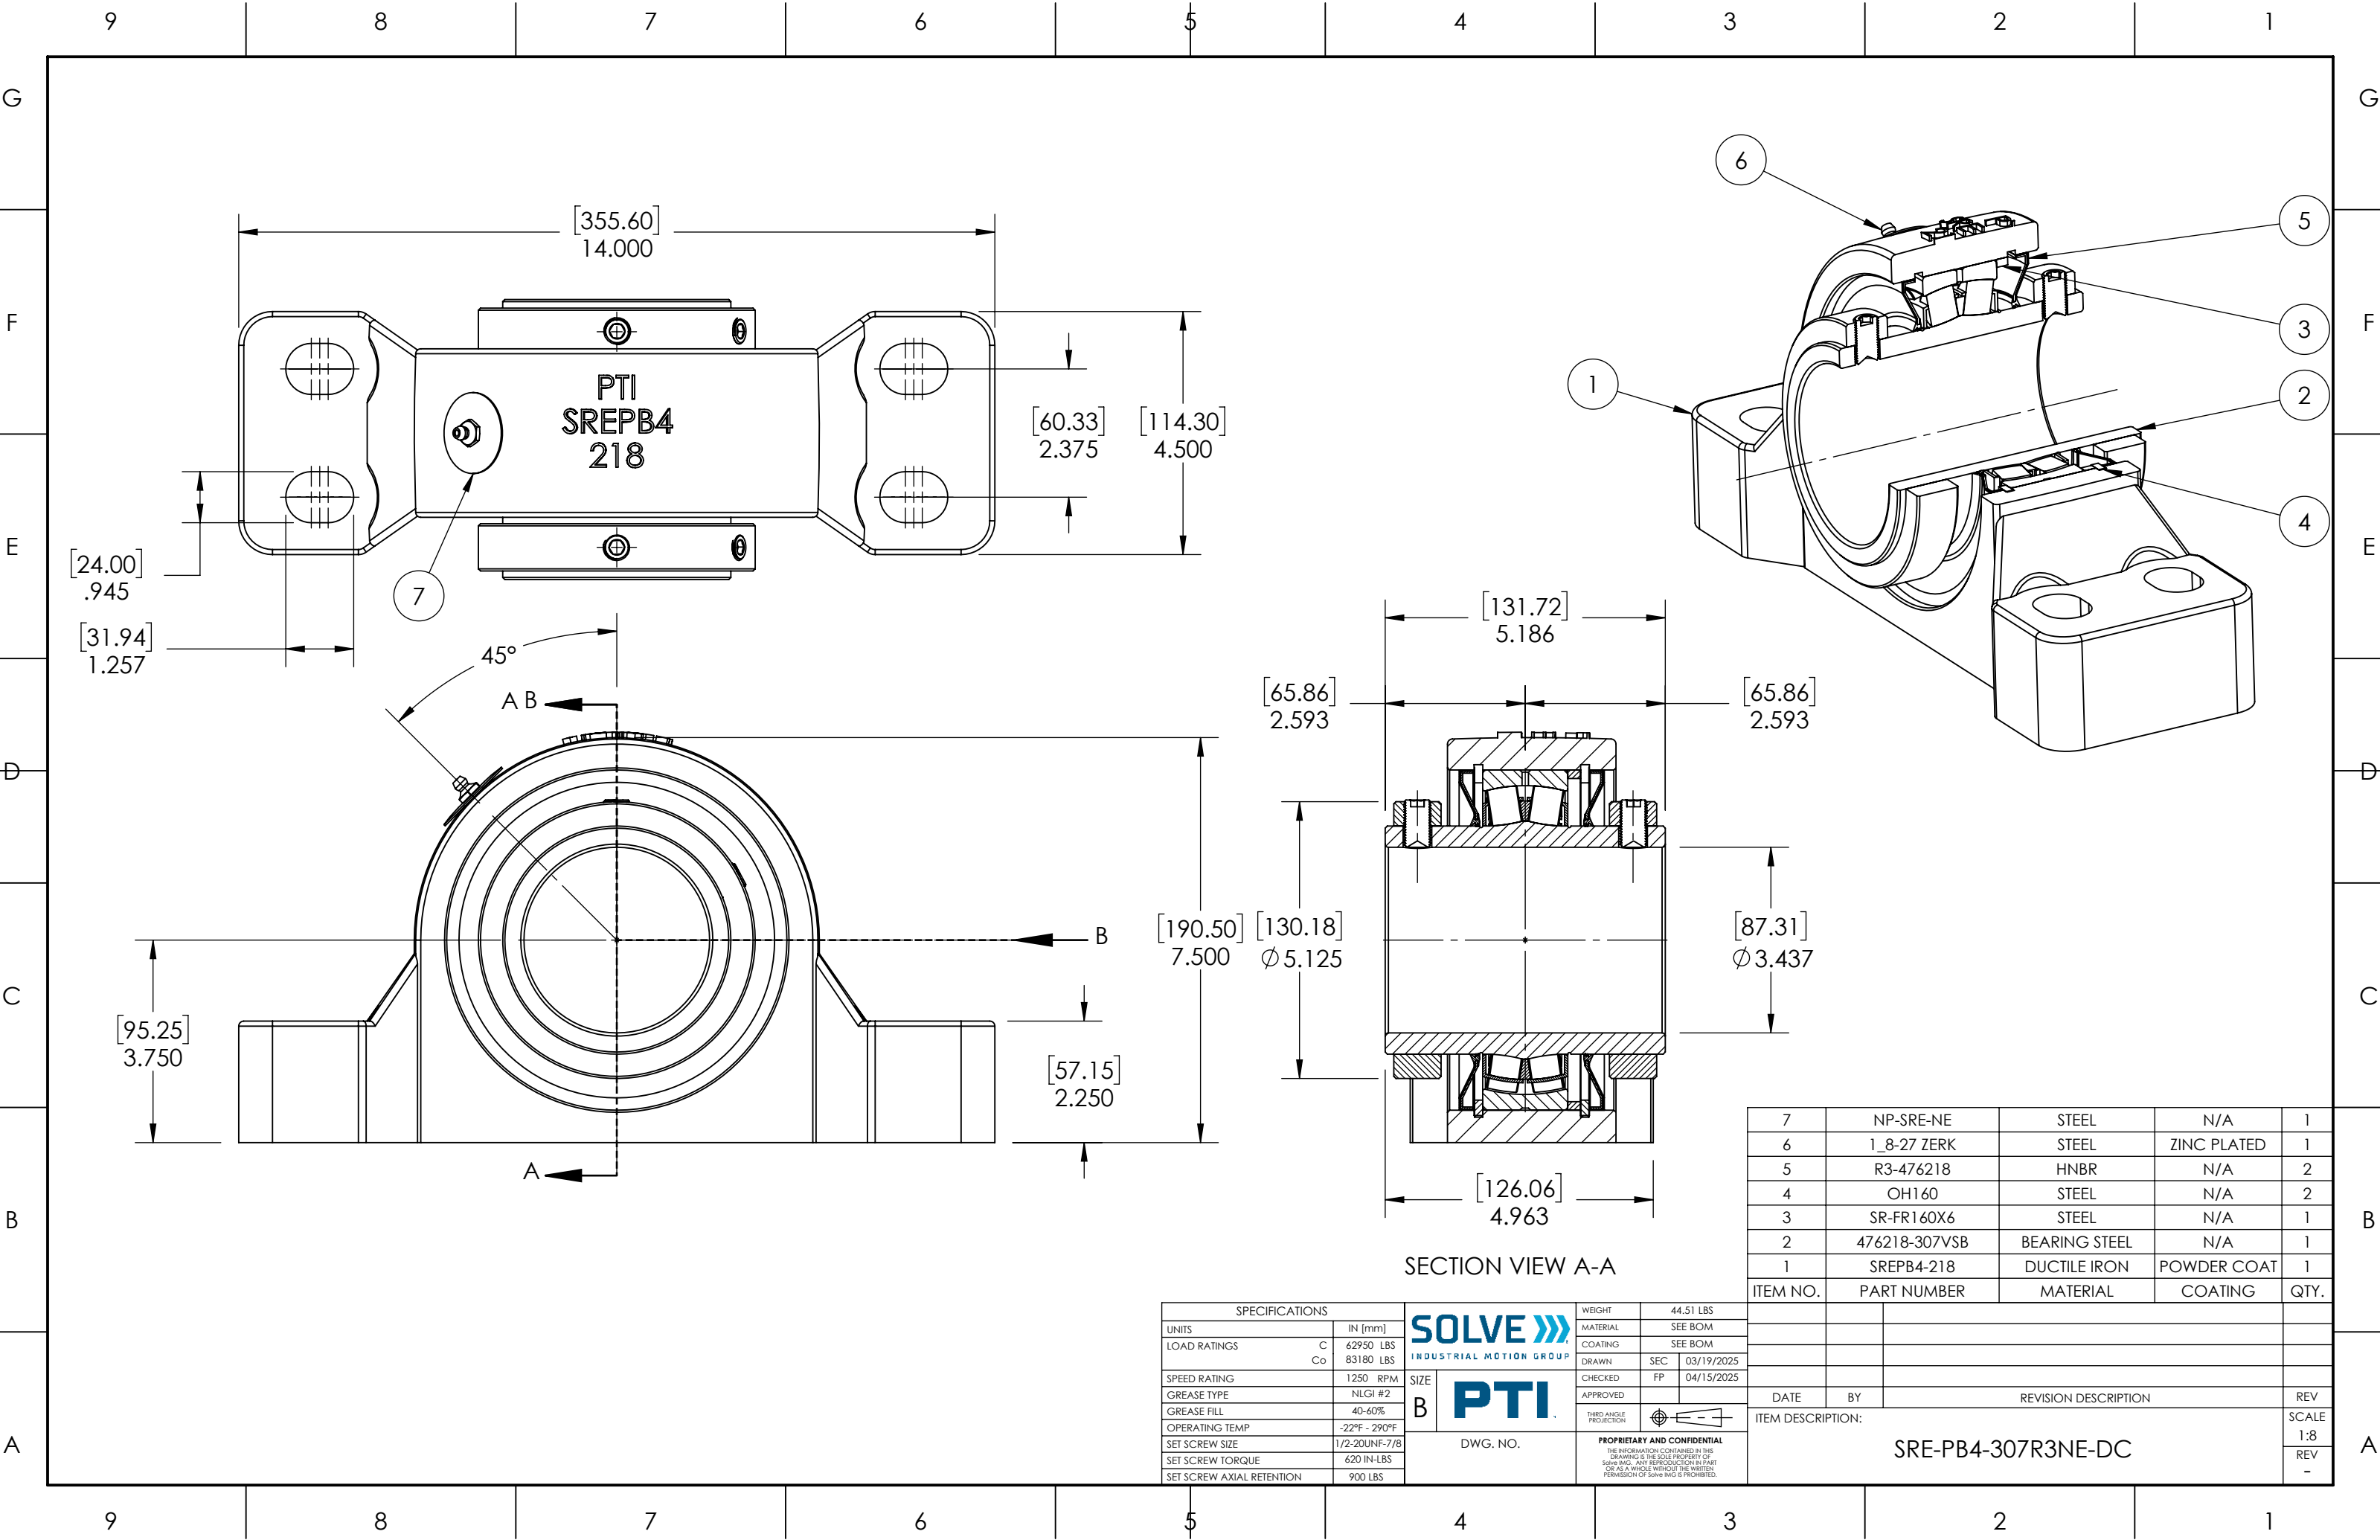





SECTION VIEW A-A

7	NP-SRE-NE	STEEL	N/A	1
6	1.8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476218	HNBR	N/A	2
4	OH160	STEEL	N/A	2
3	SR-FR160X6	STEEL	N/A	1
2	476218-307VSB	BEARING STEEL	N/A	1
1	SREP4-218	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE 		WEIGHT	44.51 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co			COATING	SEE BOM
SPEED RATING	1250 RPM			DRAWN	SEC 03/19/2025
GREASE TYPE	NLGI #2	DWG. NO.		CHECKED	FP 04/15/2025
GREASE FILL	40-60%			APPROVED	
OPERATING TEMP	-22°F - 290°F	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		THIRD ANGLE PROJECTION	
SET SCREW SIZE	1/2-20UNF-7/8			ITEM DESCRIPTION: SRE-PB4-307R3NE-DC	
SET SCREW TORQUE	620 IN-LBS				
SET SCREW AXIAL RETENTION	900 LBS			DATE	BY

REVISION DESCRIPTION		REV
SRE-PB4-307R3NE-DC		1
		2
		3
		4
		5
		6
		7
		8
		9
		10
		11
		12
		13
		14
		15
		16
		17
		18
		19
		20
		21
		22
		23
		24
		25
		26
		27
		28
		29
		30
		31
		32
		33
		34
		35
		36
		37
		38
		39
		40
		41
		42
		43
		44
		45
		46
		47
		48
		49
		50
		51
		52
		53
		54
		55
		56
		57
		58
		59
		60
		61
		62
		63
		64
		65
		66
		67
		68
		69
		70
		71
		72
		73
		74
		75
		76
		77
		78
		79
		80
		81
		82
		83
		84
		85
		86
		87
		88
		89
		90
		91
		92
		93
		94
		95
		96
		97
		98
		99
		100