
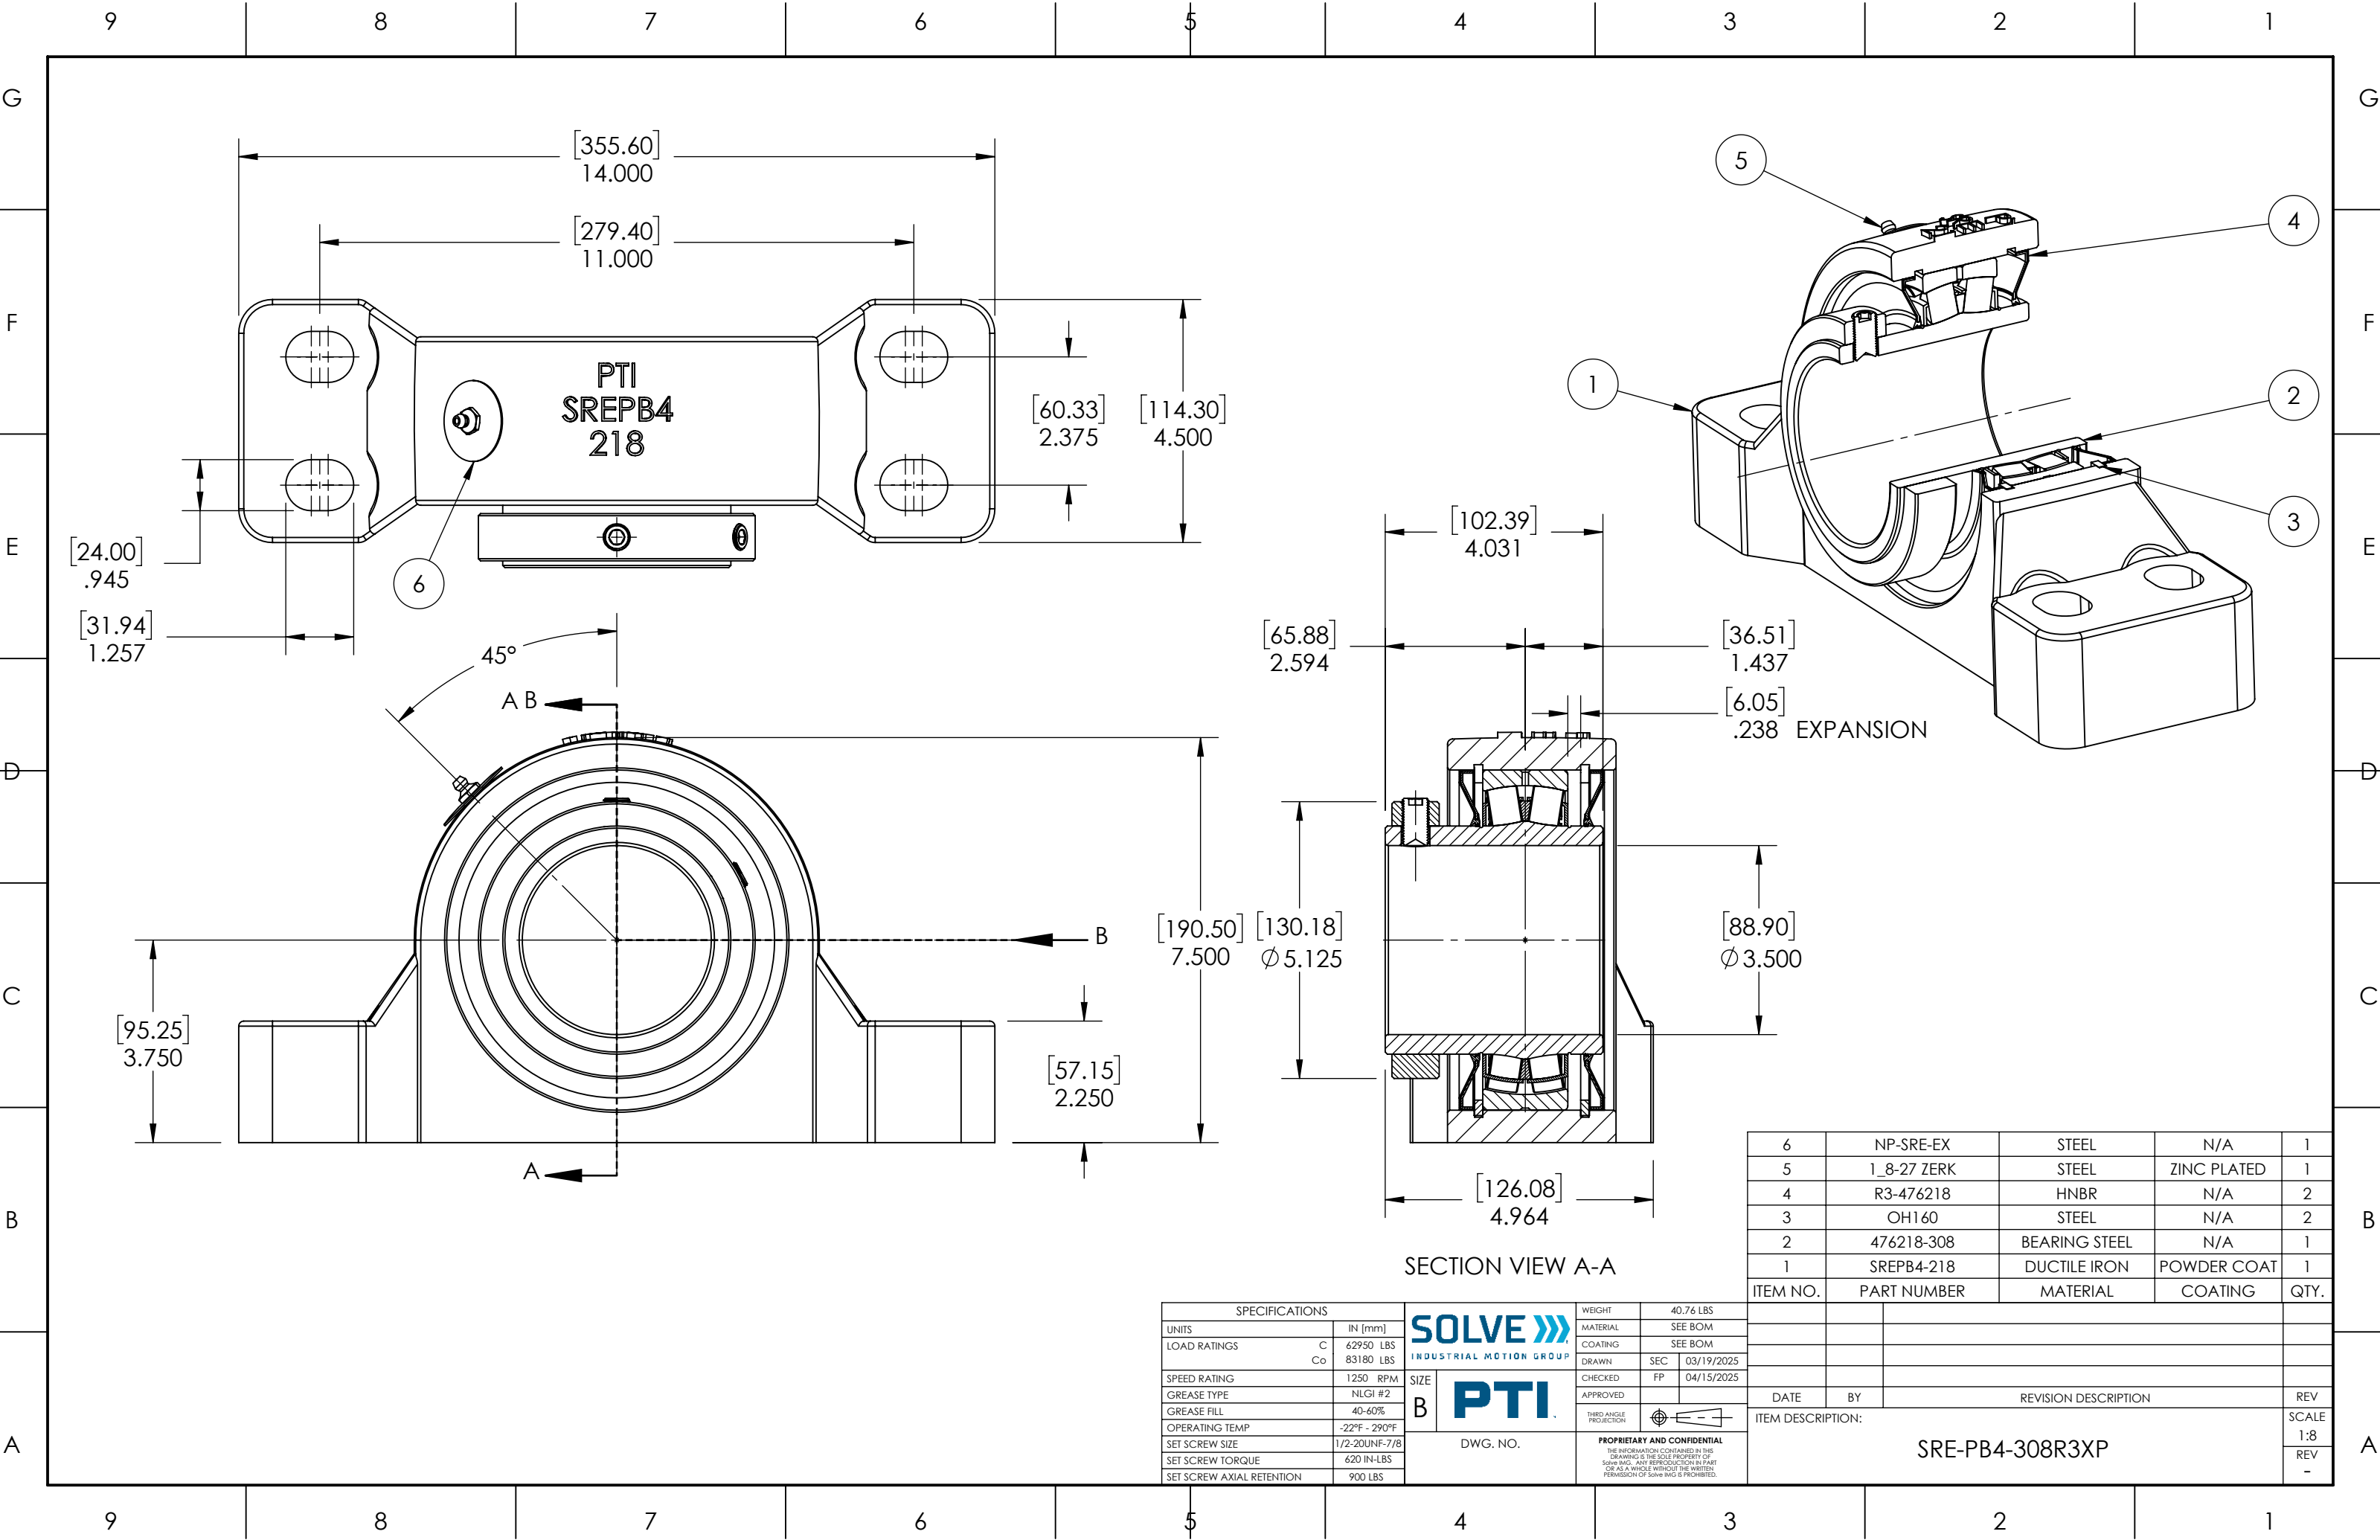




G
F
E
D
C
B
A

G
F
E
D
C
B
A

SPECIFICATIONS				SOLVE  INDUSTRIAL MOTION GROUP		WEIGHT		40.76 LBS	
UNITS		IN [mm]				MATERIAL		SEE BOM	
LOAD RATINGS	C	62950 LBS				COATING		SEE BOM	
	Co	83180 LBS							
SPEED RATING		1250 RPM		SIZE B		DRAWN	SEC	03/19/2025	
GREASE TYPE		NLGI #2				CHECKED	FP	04/15/2025	
GREASE FILL		40-60%				APPROVED			
OPERATING TEMP		-22°F - 290°F							
SET SCREW SIZE		1/2-20UNF-7/8							
SET SCREW TORQUE		620 IN-LBS		DWG. NO.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Solve IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Solve IMG IS PROHIBITED.			
SET SCREW AXIAL RETENTION		900 LBS							

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476218	HNBR	N/A	2
3	OH160	STEEL	N/A	2
2	476218-308	BEARING STEEL	N/A	1
1	SREP4-218	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-PB4-308R3XP			1:8
			REV
			-

SRE-PB4-308R3XP