
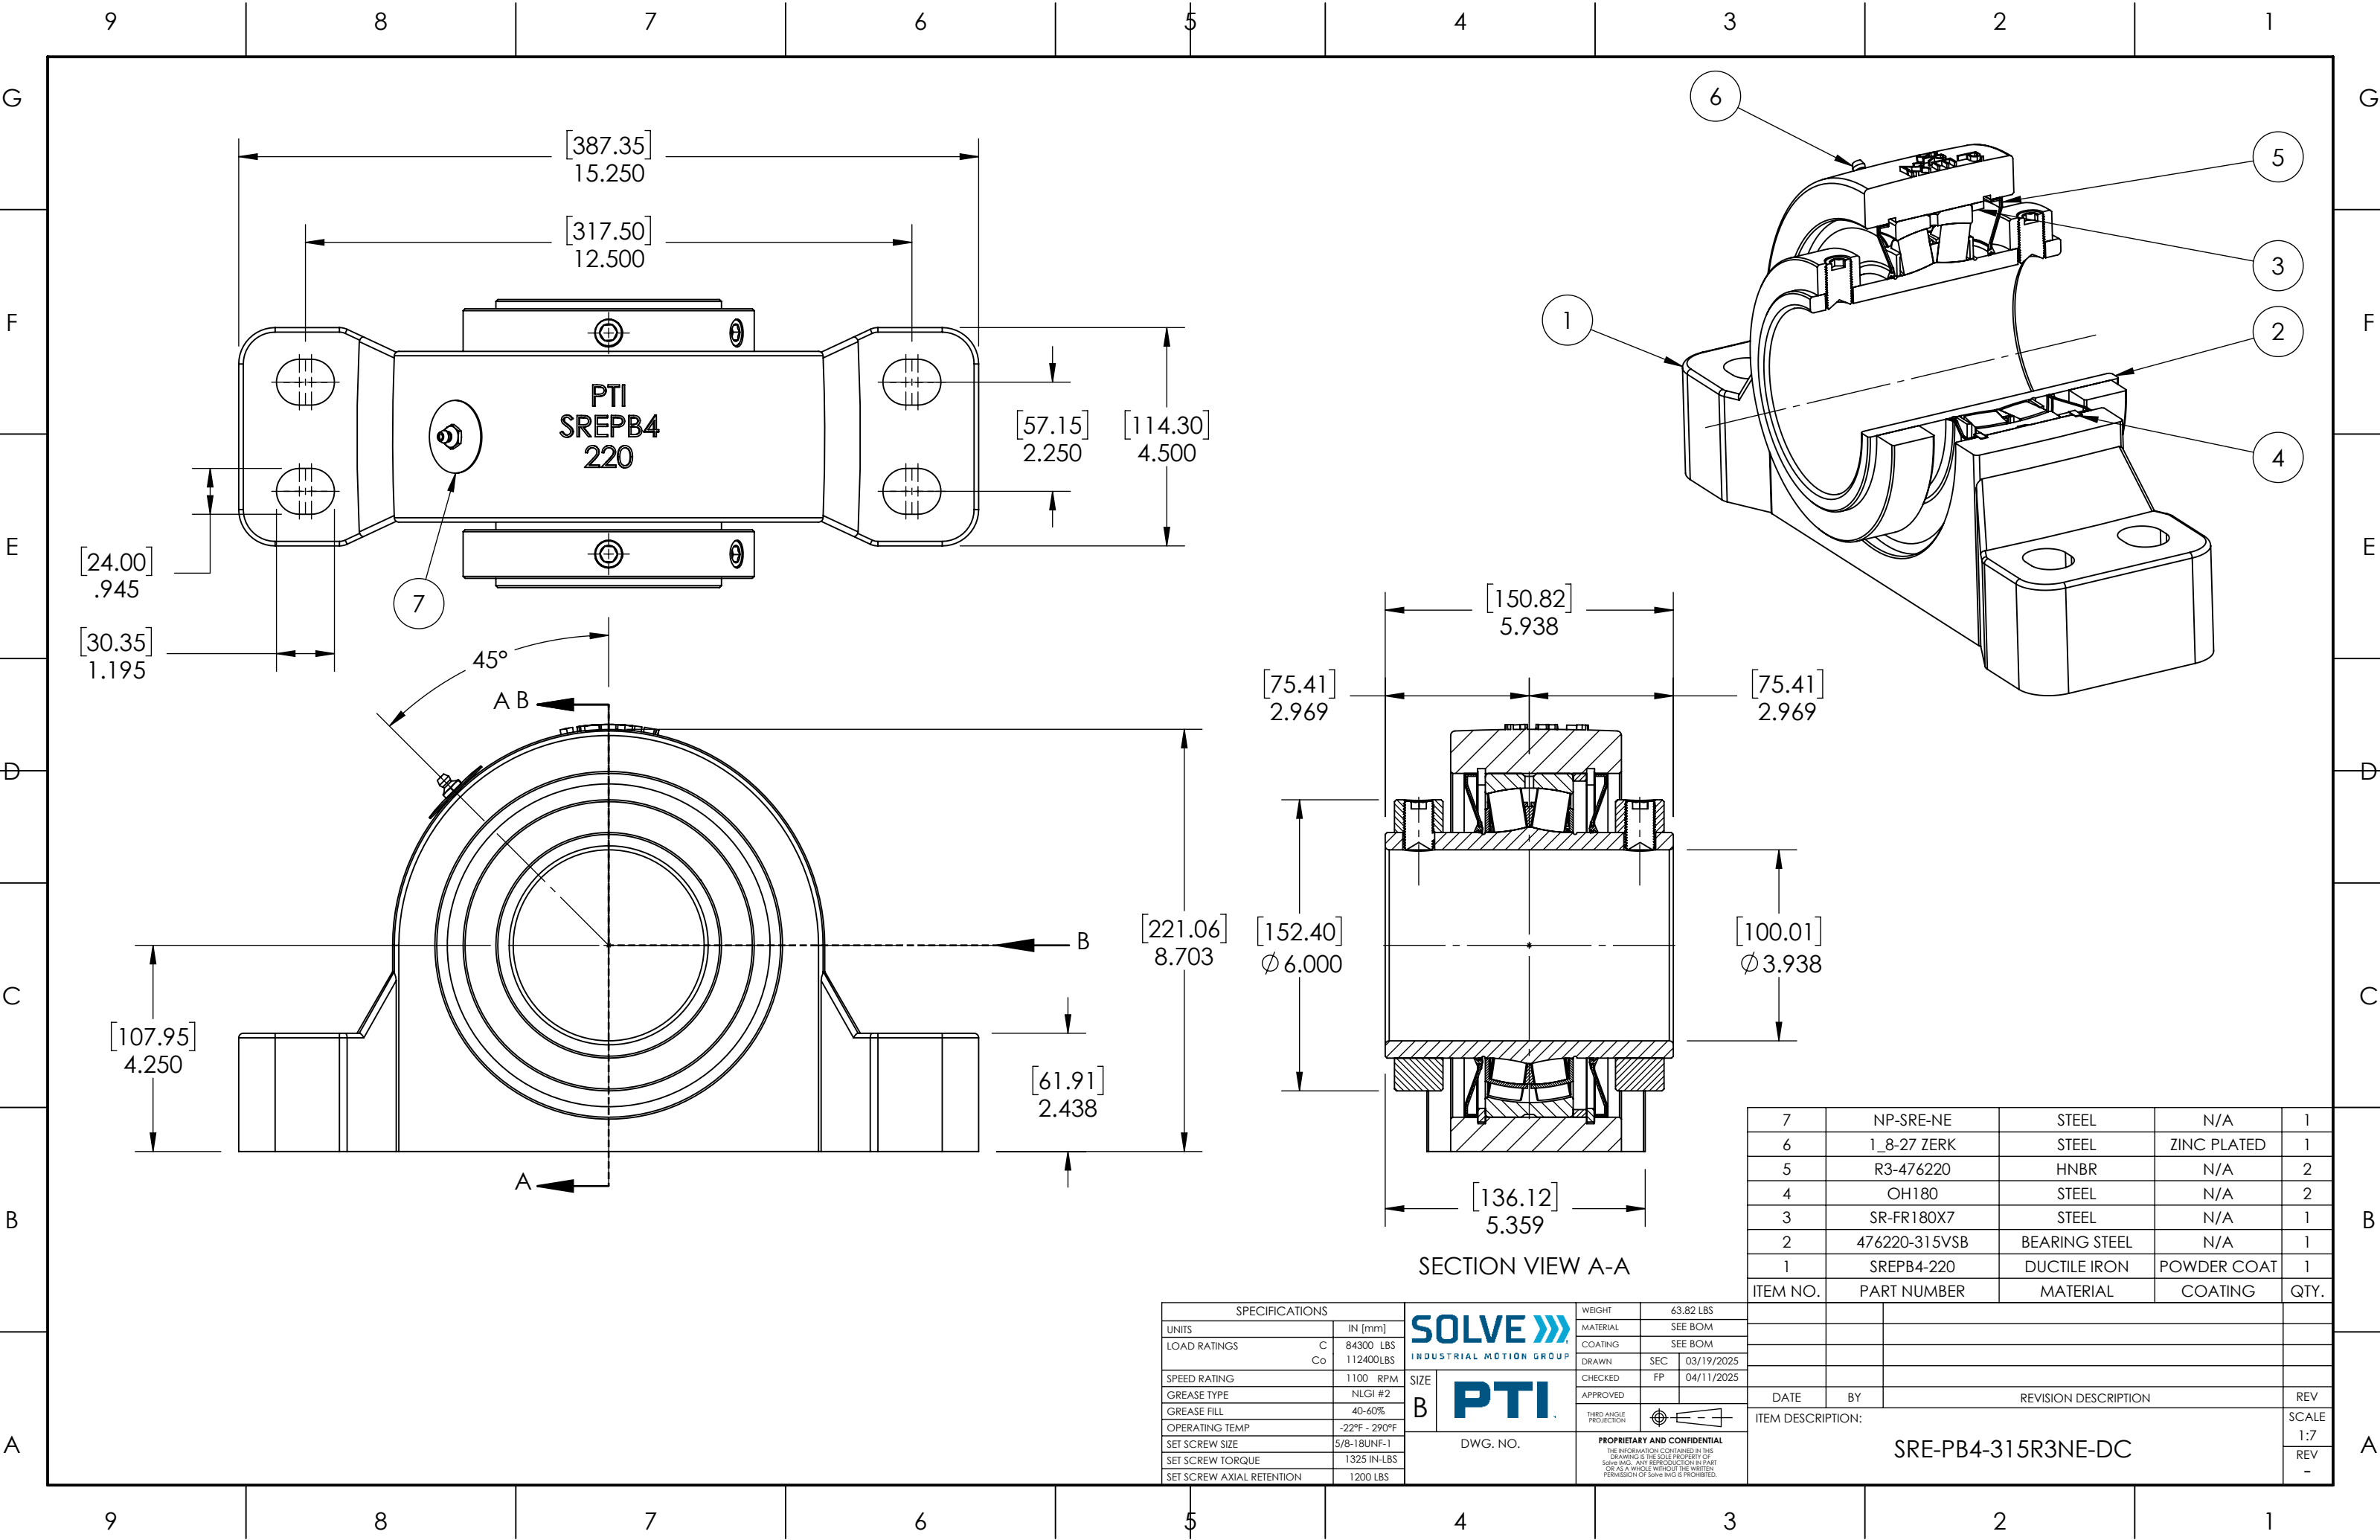




SPECIFICATIONS			
UNITS	IN [mm]		
LOAD RATINGS	C 84300 LBS Co 112400LBS		
SPEED RATING	1100 RPM		
GREASE TYPE	NLGI #2		
GREASE FILL	40-60%		
OPERATING TEMP	-22°F - 290°F		
SET SCREW SIZE	5/8-18UNF-1		
SET SCREW TORQUE	1325 IN-LBS		
SET SCREW AXIAL RETENTION	1200 LBS		

SOLVE 		WEIGHT	63.82 LBS
INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
		COATING	SEE BOM
		DRAWN	SEC 03/19/2025
		CHECKED	FP 04/11/2025
		APPROVED	
		THIRD ANGLE PROJECTION	
		PROPRIETARY AND CONFIDENTIAL	
		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.	

SIZE	B	DWG. NO.	
------	---	----------	--

7	NP-SRE-NE	STEEL	N/A	1
6	1_8-27 ZERK	STEEL	ZINC PLATED	1
5	R3-476220	HNBR	N/A	2
4	OH180	STEEL	N/A	2
3	SR-FR180X7	STEEL	N/A	1
2	476220-315VSB	BEARING STEEL	N/A	1
1	SREPB4-220	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

DATE	BY	REVISION DESCRIPTION	REV
ITEM DESCRIPTION:			SCALE
SRE-PB4-315R3NE-DC			1:7
			REV
			-