


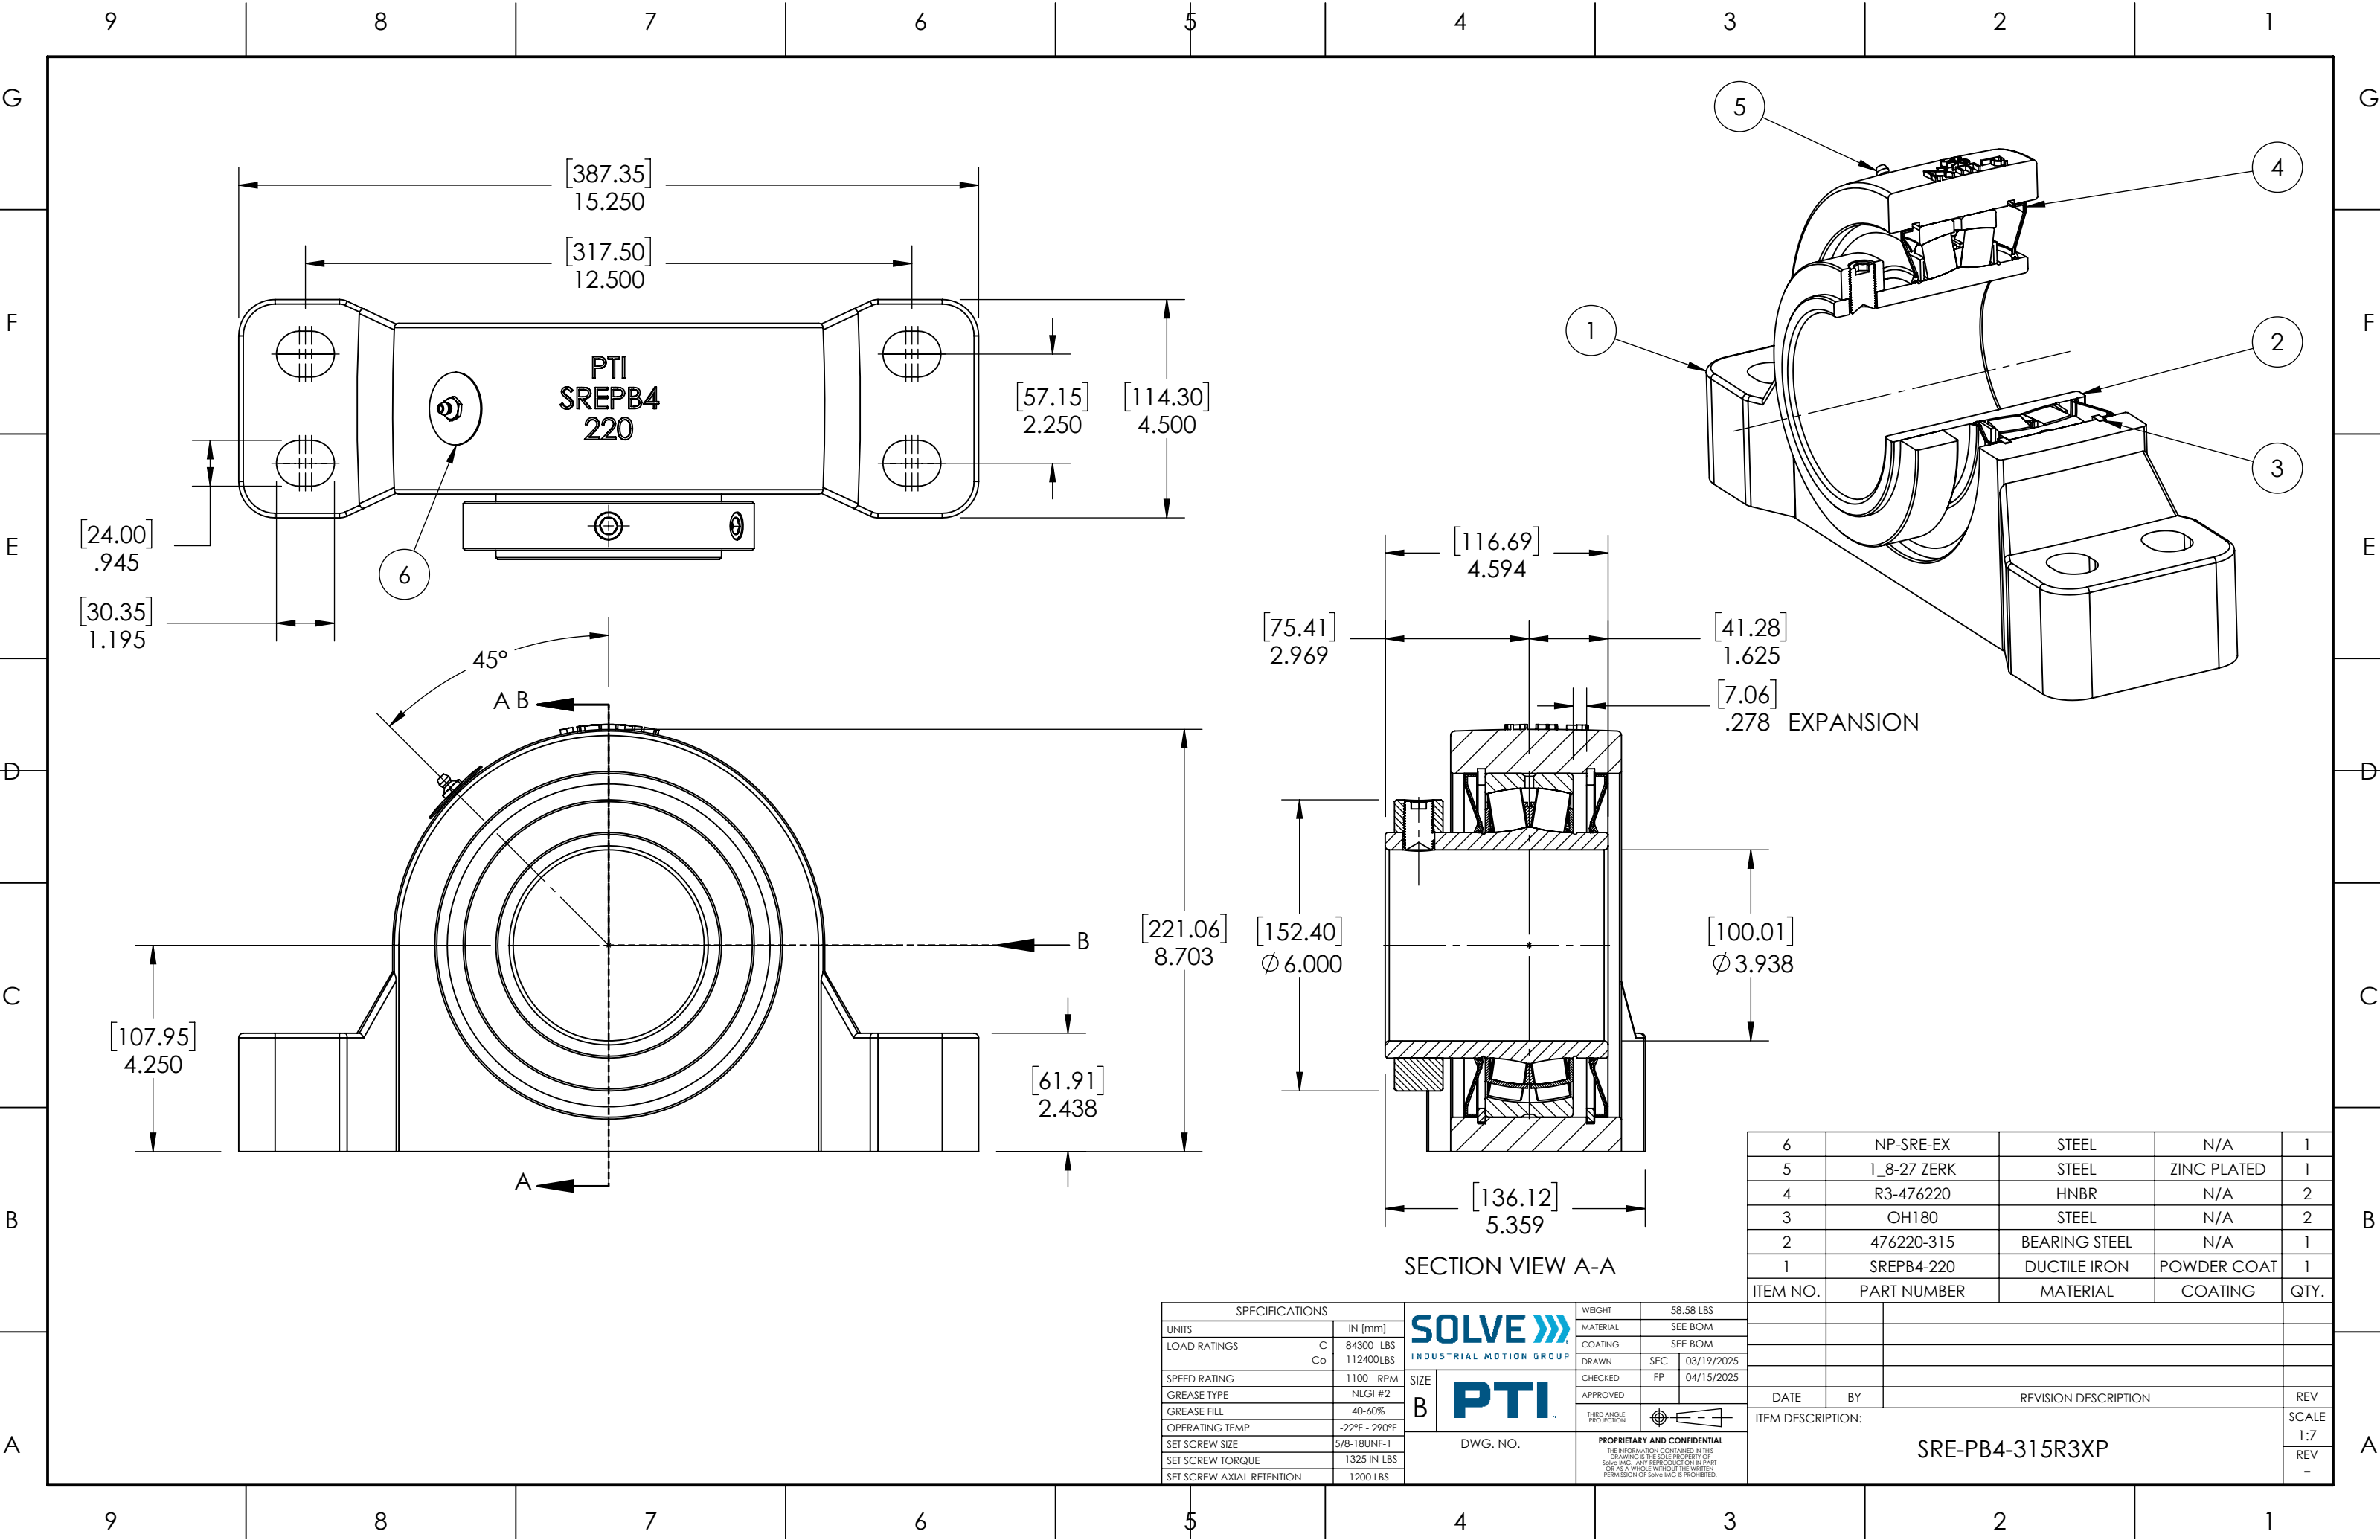

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476220	HNBR	N/A	2
3	OH180	STEEL	N/A	2
2	476220-315	BEARING STEEL	N/A	1
1	SREP4-220	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS		SOLVE		WEIGHT	58.58 LBS
UNITS	IN [mm]	INDUSTRIAL MOTION GROUP		MATERIAL	SEE BOM
LOAD RATINGS	C Co	PTI		COATING	SEE BOM
SPEED RATING	1100 RPM	SIZE	B	DRAWN	SEC 03/19/2025
GREASE TYPE	NLGI #2	DWG. NO.		CHECKED	FP 04/15/2025
GREASE FILL	40-60%	APPROVED		APPROVED	
OPERATING TEMP	-22°F - 290°F	THIRD ANGLE PROJECTION		DATE BY REVISION DESCRIPTION	
SET SCREW SIZE	5/8-18UNF-1	PROPRIETARY AND CONFIDENTIAL		ITEM DESCRIPTION:	
SET SCREW TORQUE	1325 IN-LBS	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.		SRE-PB4-315R3XP	
SET SCREW AXIAL RETENTION	1200 LBS			REV -	