
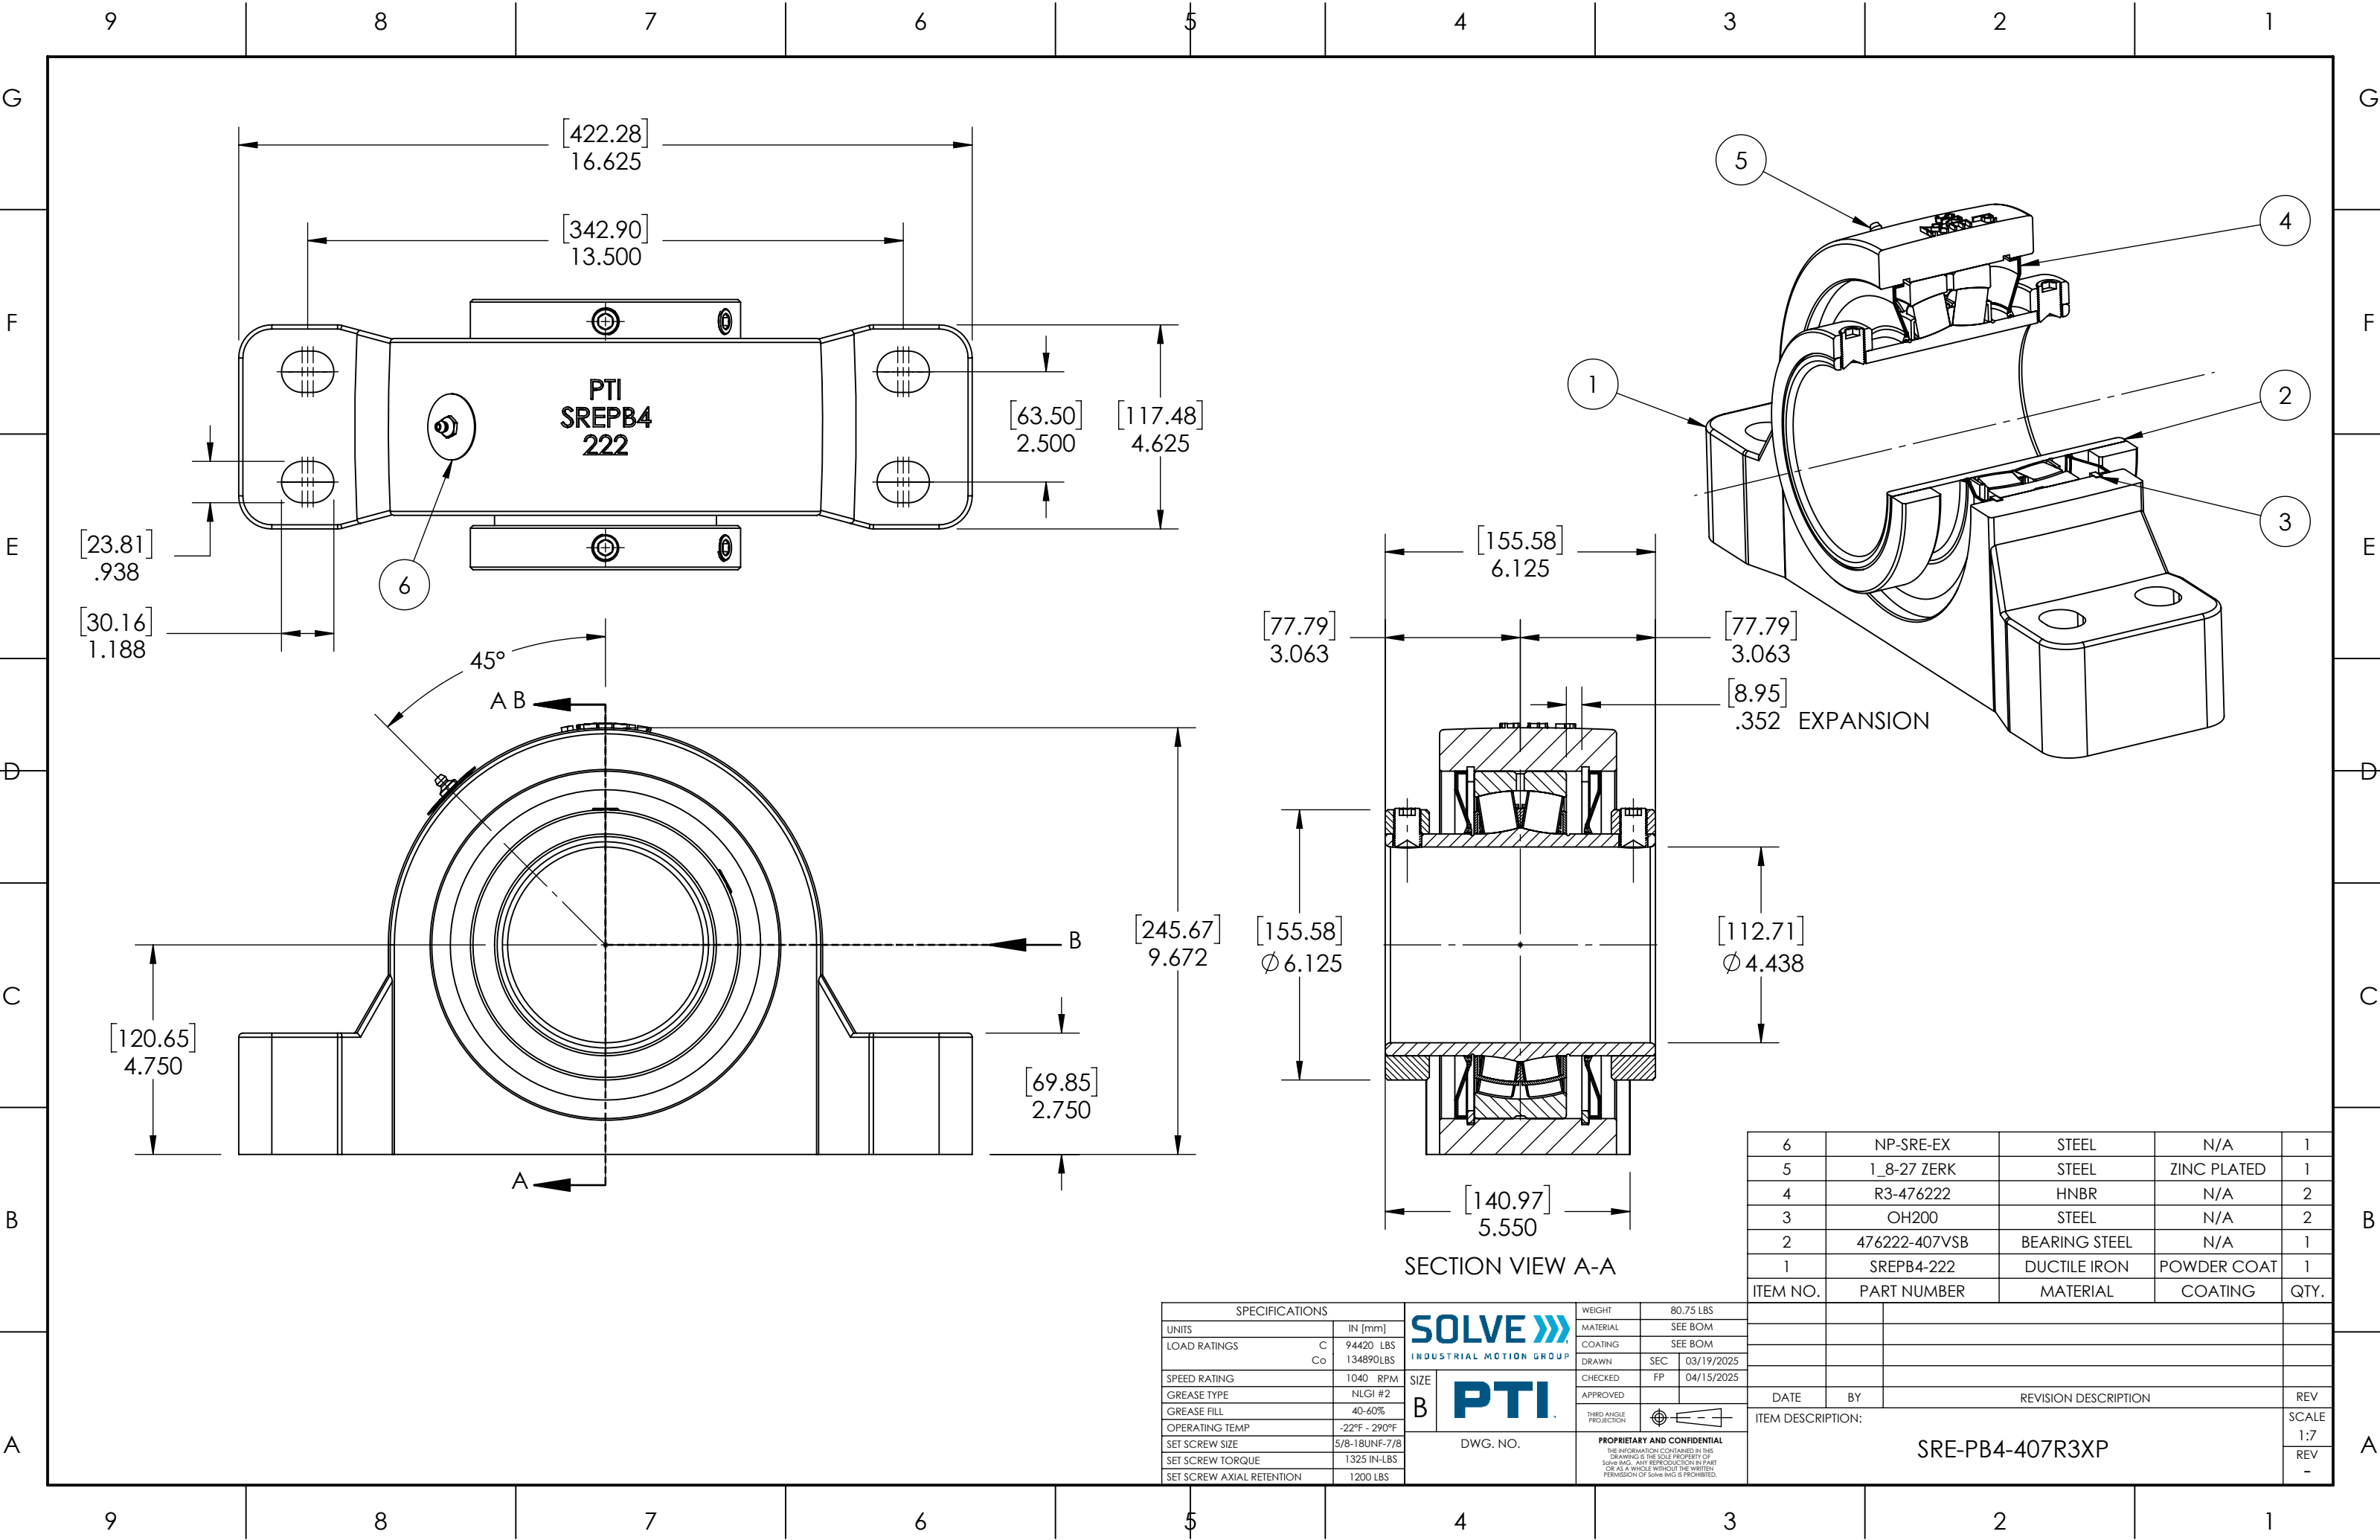




SECTION VIEW A-A

6	NP-SRE-EX	STEEL	N/A	1
5	1_8-27 ZERK	STEEL	ZINC PLATED	1
4	R3-476222	HNBR	N/A	2
3	OH200	STEEL	N/A	2
2	476222-407VSB	BEARING STEEL	N/A	1
1	SREP4-222	DUCTILE IRON	POWDER COAT	1
ITEM NO.	PART NUMBER	MATERIAL	COATING	QTY.

SPECIFICATIONS			SOLVE INDUSTRIAL MOTION GROUP		WEIGHT	80.75 LBS
UNITS		IN [mm]			MATERIAL	SEE BOM
LOAD RATINGS	C Co	94420 LBS 134890LBS	SIZE B		COATING	SEE BOM
SPEED RATING		1040 RPM			DRAWN	SEC 03/19/2025
GREASE TYPE		NLGI #2	PTI 		CHECKED	FP 04/15/2025
GREASE FILL		40-60%			APPROVED	
OPERATING TEMP		-22°F - 290°F	DWG. NO.		THIRD ANGLE PROJECTION	
SET SCREW SIZE		5/8-18UNF-7/8			PROPRIETARY AND CONFIDENTIAL	
SET SCREW TORQUE		1325 IN-LBS	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLVE IMG. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLVE IMG IS PROHIBITED.			
SET SCREW AXIAL RETENTION		1200 LBS				